

clickable

Click on an article number in the catalog PDF to call it up in the Industry Mall and you will have access to all the required information.

Article No.

3RA1943-2C
3RA1943-2B
3RA1953-2B
3RA1953-2N



Or directly on the Internet, e.g.
[www.siemens.com/
product?3RA1943-2C](http://www.siemens.com/product?3RA1943-2C)

Price groups

PG 212, 230, 250, 254, 255, 256, 41B, 41H, 41L, 42B, 42C, 42D, 42J, 5K1, 5K2, 5N3, 5W3

Introduction

2/3 AS-Interface

2/13 IO-Link

AS-Interface

Introduction

2/18 Communication overview

2/19 System components

AS-Interface specification

2/20 - Specification V3.0

2/21 - AS-i Power24V

ASIsafe

2/22 Introduction

2/40 F-CM AS-i Safety ST for
SIMATIC ET 200SP

2/24 **SIRIUS 3RK3 Modular Safety
System NEW**

2/28 AS-Interface safety monitors

2/29 **AS-Interface safety modules NEW**

12/83 SIRIUS 3SF1 mechanical safety
switches for AS-Interface

SIRIUS ACT pushbuttons and
indicator lights

13/97 - Modules for actuators and indicators:
AS-Interface modules

13/109 - Pushbuttons and indicator lights in
an enclosure for AS-Interface

13/113 - Modules for enclosures:
AS-Interface modules

Masters

Masters for SIMATIC S7

2/32 - CM 1243-2

2/34 - CP 343-2/CP 343-2

Masters for SIMATIC ET 200

2/36 - **CM AS-i Master ST for
SIMATIC ET 200SP NEW**

2/40 - F-CM AS-i Safety ST for
SIMATIC ET 200SP

Routers

2/44 DP/AS-i Link Advanced

2/48 DP/AS-Interface Link 20E

2/51 IE/AS-i Link PN IO

Slaves

I/O modules for use in the field,
high degree of protection

2/55 - Digital I/O modules, IP67 – Introduction

2/56 - Digital I/O modules, IP67 – K60

2/58 - **Digital I/O modules, IP68/IP69K –
K60R NEW**

2/61 - Digital I/O modules, IP67 – K45

2/63 - **Digital I/O modules, IP67 – K20 NEW**

2/65 - Analog I/O modules, IP67 – K60

I/O modules for use in the control
cabinet

2/68 - Introduction

2/69 - **SlimLine Compact NEW**

2/73 - F90 module

2/74 - Flat module

Modules with special functions

2/75 - Counter modules

2/76 - Ground-fault detection modules

2/77 - Overvoltage protection modules

Contactors and contactor assemblies

3/17 - SIRIUS 3RT contactors,
3-pole up to 250 kW

3/156 - SIRIUS 3RA23 reversing contactor
assemblies, up to 55 kW

3/171 - SIRIUS 3RA24 contactor assemblies
for star-delta (wye-delta) starting,
up to 90 kW

3/107 - SIRIUS 3RA27 function modules

Motor starters for use in the control
cabinet

8/56 - SIRIUS 3RA6 compact starters:
3RA61 direct-on-line starters,
3RA62 reversing starters

9/43 Motor starters for use in the field,
high degree of protection
- SIRIUS M200D motor starters for
AS-Interface

D 31.2¹⁾ SINAMICS G110M, SINAMICS G110D
Distributed Inverters

SIRIUS ACT pushbuttons and indicator
lights

13/97 - Modules for actuators and indicators:
AS-Interface modules

13/107 - Pushbuttons and indicator lights in an
enclosure for AS-Interface

13/113 - Modules for enclosures:
AS-Interface modules


13/167 SIRIUS 8WD4 signaling columns

¹⁾ See Catalog D 31.2.

	<u>Power supply units and data decoupling modules</u>		<u>Input modules</u>
2/78	AS-Interface power supply units	2/114	General data
2/79	30 V power supply units	2/115	K20 IO-Link modules
15/1	24 V power supply units		<u>Contactors and contactor assemblies</u>
2/81	S22.5 data decoupling modules	3/17	- SIRIUS 3RT contactors, 3-pole up to 250 kW
	Data decoupling modules for S7-1200	3/156	- SIRIUS 3RA23 reversing contactor assemblies, up to 55 kW
2/83	- DCM 1271 data decoupling module	3/171	- SIRIUS 3RA24 contactor assemblies for star-delta (wye-delta) starting, up to 90 kW
	<u>Transmission media</u>	3/107	- SIRIUS 3RA27 function modules
2/85	AS-Interface shaped cable		<u>Overload relays</u>
	<u>System components and accessories</u>	7/130	SIRIUS 3RB24 electronic overload relays for IO-Link for high-feature applications
2/86	Repeaters		<u>Motor starters for use in the control cabinet</u>
2/87	Extension plugs		3RA64, 3RA65 compact starters for IO-Link
2/88	Addressing units NEW	8/68	- 3RA64 direct-on-line starters
2/90	Analyzer NEW	8/69	- 3RA65 reversing starters
2/94	Miscellaneous accessories NEW		<u>Monitoring relays</u>
2/12	Diagnostics	10/70	SIRIUS 3RR24 monitoring relays for mounting onto 3RT2 contactors for IO-Link
	<u>Software</u>	10/109	SIRIUS 3UG48 monitoring relays for stand-alone installation for IO-Link
14/19	AS-Interface block library for SIMATIC PCS 7	10/143	SIRIUS 3RS14, 3RS15 temperature monitoring relays for IO-Link
	<u>IO-Link</u>		<u>SIRIUS ACT pushbuttons and indicator lights</u>
	<u>Introduction</u>	13/10	3SU1 ID key-operated switches
2/97	Communication overview		3SU1 electronic modules for IO-Link
2/98	System components	13/98	- For front plate mounting
2/103	IO-Link specification	13/113	- For base mounting
	<u>Masters</u>	ID 10 ¹⁾	<u>RFID systems</u>
	IO-Link master module for S7-1200	2/102	<u>IO-Link Device Description (IODD)</u>
2/104	- SM 1278 4xIO-Link master	2/102	<u>Software</u>
	IO-Link master module for ET 200SP		
2/105	- CM 4xIO-Link	1)	See Catalog ID 10.
	IO-Link master module for ET 200pro		
2/108	- IO-Link master module		
	IO-Link master module for ET 200eco PN		
2/109	- ET 200eco PN IO-Link master		
	IO-Link master module for ET 200AL		
2/111	- CM IO-Link		

clickable

Click on an article number in the catalog PDF to call it up in the Industry Mall and you will have access to all the required information.

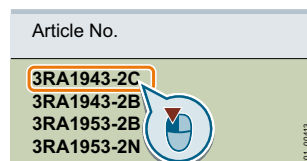

Or directly on the Internet, e.g.
www.siemens.com/product?3RA1943-2C

Overview

More information

Homepage, see www.siemens.com/as-interfaceIndustry Mall, see www.siemens.com/product?as-interface

AS-Interface

AS-Interface – the smart communication standard for universal connection of the field level to the control system

The AS-Interface (AS-i) – the Actuator-Sensor-Interface, to be more precise – is a smart bus system for the field level that connects all the sensors and actuators in the field to the higher-level control system more simply, flexibly and efficiently than any other.

The structure of a complex automation system is not always clear at first glance. The field level in particular, with its large numbers of devices with real-time requirements, needs a clear structure.

That is exactly what the AS-i fieldbus delivers: Via a simple two-wire cable – the yellow AS-i cable – in an AS-i network up to 62 bus nodes can be connected to the AS-i master and simultaneously supplied with power. The standard here is robust data transmission in a rugged environment with a high degree of protection for the AS-Interface.

AS-i = simple!

- Only one cable for data and energy
- Time-saving assembly/installation
- Engineering in the TIA Portal
- User-friendly maintenance

AS-i = flexible!

- Flexible topologies
- Open standard
- Expandability
- Safety engineering

AS-i = efficient!

- User-friendly addressing
- Fast device replacement
- Ruggedness and stability
- Device and network diagnostics

IC01_00210

AS-i from Siemens has everything in its favor

- Complete AS-i product range for bus-based standard and safety technology from a single source
- System-wide integration of the AS-i devices into SIMATIC, SINUMERIK and the TIA Portal engineering framework
- Integration of ASIsafe applications into SIMATIC F controller safety programming
- Central configuration of standard and safety technology in the TIA Portal and in STEP7 Classic – just one engineering framework for controller, AS-i Master and safety
- Quick diagnostics of master and slave components via web browser, HMI or TIA Portal
- Planning, calculation and verification of the whole safety chain based on AS-i Safety in the Safety Evaluation Tool (TÜV-approved)
- Integration of lower-level AS-i networks into the PCS 7 process control system
- Global spare parts logistics, consulting and service

		Article No.	Page
ASIsafe			
<p>ASIsafe enables integration of safety-related components in an AS-Interface network, for example:</p> <ul style="list-style-type: none"> • EMERGENCY STOP pushbuttons • Protective door switches • Cable-operated switches • Other AS-i safety sensors <p>Your advantage: The simple wiring of AS-Interface is maintained.</p>			
<p>AS-i Master and AS-i Safety module for ET 200SP</p> <p>The CM AS-i Master ST and F-CM AS-i Safety ST modules are plugged into an ET 200SP configuration and connect an AS-i network, including safety-related inputs and outputs, with the controller.</p> <ul style="list-style-type: none"> • Single, double and multiple masters possible • Per CM AS-i Master ST module up to 496 DI / 496 DQ / 124 AI / 124 AQ possible • Per F-CM AS-i Safety ST module up to 31 safe input signals (two-channel) / 16 safe output channels possible • Configuring with TIA Portal or STEP 7 Classic • Plant-wide safety programming of the F-CPU via SIMATIC Distributed Safety/ Safety Advanced / F systems • Integrated diagnostics • No other programming tools required <p>Your advantage: Modular connection of fail-safe AS-i networks with system-wide programming in SIMATIC and SINUMERIK controllers.</p>		6ES7	From 2/36

AS-i Master and
AS-i Safety module

Industrial Communication

Introduction

AS-Interface

ASIsafe (continued)



3RK3
Modular Safety System



Safety monitor



K45F



SC17.5F



S45F SlimLine module,
safe AS-i output



Safety switch



EMERGENCY STOP
mushroom pushbutton
in enclosure

Modular Safety System (MSS)

Supplementing the service-proven concept of safety monitors, the 3RK3 Modular Safety System offers, for example, the following functions for ASIsafe:

- Up to 50 enabling circuits including muting function
- Expandable fail-safe and non-fail-safe inputs/outputs
- Control of up to 12 ASIsafe outputs or 12 fail-safe independent switch-off groups
- Memory module for parameters, e.g. for device replacement
- Optional PROFIBUS interface for diagnostics and parameterization
- SIRIUS Safety ES, the intuitive graphic parameterization and diagnostics software
- AS-i Power24V capability

Your advantage: Easy to configure safety functions up to Category 4, PL e, SIL 3.

AS-Interface safety monitors

- For monitoring safe stations and for linking AS-Interface inputs and outputs
- Ensures safe disconnection
- Available with one or two release circuits with two-channel configuration
- All versions with removable screw terminals or spring-type terminals
- All safety monitors in revised Version 3 with additional options
- Filtering out of brief single-channel interruptions in the sensor circuit with the expanded safety monitor Version 3
- Expanded safety monitor with integrated safe slave for controlling a distributed safe AS-i output or for safe coupling a safe signal from one AS-i network to another AS-i network
- ASIMON V3 Configuration software with graphic function diagram presentation

Your advantage: Easy to configure safety functions up to Category 4, PL e, SIL 3.

AS-Interface safety modules

- Complete portfolio of ASIsafe modules
 - For connection of safety switches with contacts (e.g. position switches)
 - Degree of protection IP65/IP67 or IP20
 - Especially compact dimensions, with widths from 17.5 mm
 - Up to four safe inputs per module
 - Up to one safe output per module
 - Standard outputs are available on the module in addition
 - Up to Category 4, PL e, SIL 3
- Your advantage: Easy integration of safe signals both in the switching cabinet and in the field.

SIRIUS 3SF1 mechanical safety switches for AS-Interface

- Plastic with degree of protection IP65 and metal with degree of protection IP66/IP67
- ASIsafe electronics integrated into the enclosure
- Available with separate actuator, with or without tumbler





Your advantage: Conventional wiring of safety functions no longer required.

SIRIUS ACT EMERGENCY STOP mushroom pushbuttons for AS-Interface

- Degree of protection IP66/IP67/IP69K
- Metal or plastic version
- Connection of an EMERGENCY STOP device according to EN ISO 13850 to AS-Interface
- Safety-related AS-Interface module is snapped onto the commanding device from behind
- Can be used up to PL e, SIL 3

Your advantage: Easy direct connection of control elements to ASIsafe.

Article No.	Page
3RK3	From 2/24, from 11/30
3RK1	2/28
3RK1	From 2/29
3SF1	From 12/83
3SU14 modules 3SU18 enclosure	13/97, 13/113 13/107

Masters		Article No.	Page
 CM 1243-2 for SIMATIC S7-1200  CP 343-2, CP 343-2P for SIMATIC S7-300  CM AS-i Master ST for SIMATIC ET 200SP  F-CM AS-i Safety ST for SIMATIC ET 200SP	<p>The AS-Interface master connects SIMATIC control systems to AS-Interface. It automatically organizes the data traffic on the AS-Interface cable and handles not only signal processing, but also parameter setting, monitoring and diagnostics functions.</p> <p>Masters for SIMATIC S7</p> <p>AS-Interface master connections:</p> <ul style="list-style-type: none"> • CM 1243-2 for SIMATIC S7-1200 • CP 343-2P, CP 343-2 for SIMATIC S7-300 and ET 200M <p>Features:</p> <ul style="list-style-type: none"> • Connection of up to 62 AS-Interface slaves • Connection of up to 496 inputs and 496 outputs per master or AS-Interface network • Integrated analog value transmission • Simple configuration by adopting the actual configuration on the AS-Interface network • Easy operation in the input/output address area of the SIMATIC S7 comparable to standard I/O modules • Monitoring of the control supply voltage on the AS-Interface shaped cable <p>Your advantage: Easy connection to SIMATIC controllers.</p>	3RK7 6GK7	From 2/32 From 2/34
	<p>Masters for SIMATIC ET 200</p> <p><u>CM AS-i Master ST for SIMATIC ET 200SP</u></p> <ul style="list-style-type: none"> • Connection of up to 62 AS-Interface slaves per master • Connection of up to 496 inputs and 496 outputs per AS-Interface network • Integrated analog value transmission • Simple configuration by adopting the ACTUAL configuration on the AS-Interface network • Easy operation in the input/output address range of the SIMATIC (or other controller) comparable to standard I/O modules • Monitoring of the control supply voltage on the AS-Interface shaped cable • Integrated ground-fault monitoring <p>Your advantage: Easy connection of AS-i networks to distributed I/Os.</p>	3RK7	From 2/36
	<p><u>F-CM AS-i Safety ST for SIMATIC ET 200SP</u></p> <ul style="list-style-type: none"> • Monitoring of up to <ul style="list-style-type: none"> - 31 fail-safe AS-i input slaves per F-CM - 16 fail-safe AS-i outputs per F-CM • Transmission via PROFI-safe into the F-CPU for safety-related applications up to SIL 3 (IEC 61508/EN 62061)/PL e (EN ISO 13849-1) • As a result, these sensors become part of the "unlimited programming and data archiving" options of SIMATIC and of Safety Integrated. <p>Your advantage: Easy connection of fail-safe AS-i networks to the distributed I/Os.</p>	3RK7	From 2/40

Industrial Communication

Introduction

AS-Interface

Routers



DP/AS-i Link Advanced



DP/AS-Interface Link 20E



IE/AS-i Link PN IO

- Degree of protection IP20
- PROFIBUS slave or PROFINET IO device and AS-Interface master (single or double master in case of DP/AS-i Link Advanced and IE/AS-i Link PN IO)
- Connection of up to 62 AS-Interface slaves per AS-Interface network
- Connection of up to 496 digital inputs and 496 outputs per AS-i network, with doubling of the project data volume for double master versions
- Integrated ground-fault monitoring (in case of DP/AS-i Link Advanced and IE/AS-i Link PN IO)
- User-friendly local diagnostics and local startup by means of a full graphic display and control keys or through a web interface with a standard browser (in case of DP/AS-i Link Advanced and IE/AS-i Link PN IO)
- Integrated analog value transmission
- Configuring and uploading of AS-Interface configuration in STEP 7 possible
- User-friendly selection of AS-Interface slaves

Your advantage: Compact transition to PROFIBUS or PROFINET.

As an alternative to the IE/AS-i Link PN IO, a high-performance router can be set up between PROFINET and AS-Interface by combining the CM AS-i Master ST and F-CM AS-i Safety ST modules in an ET 200SP station (for safety-related applications), [see pages 2/36 and 2/40](#).

Article No.

Page

3RK3, 6GK1

From 2/44

Slaves

Slaves contain the AS-Interface electronics and connection options for sensors and actuators in the field and in the control cabinet. A total of up to 62 slaves can be connected to one bus. The slaves then exchange their data in cyclic mode with a control module (master).

I/O modules for use in the field, high degree of protection

Digital I/O modules, IP67 – K60, K60R, K45 and K20

- Degree of protection IP65/IP67 or IP68/IP69K
- Modules available with up to degree of protection IP68/IP69K
- Connection sockets in M8/M12
- Up to eight inputs and four outputs
- A/B technology available
- Contacting protected against polarity reversal
- Standard rail mounting and wall mounting possible
- Mounting of the module on the base plate using just one screw
- Diagnostics LEDs

Your advantage: Reduction of mounting and startup times by up to 40%.



K20 digital module



K45 digital module



K60 digital module



K60 analog module

Analog I/O modules, IP67 – K60

- Degree of protection IP65/IP67
- Detects or transmits analog signals locally
- two-/four-channel
- Input modules for up to four sensors with current signal, with voltage signal or with thermal resistor
- Output modules for current or voltage
- Fast analog modules available for higher access speeds

Your advantage: Easy integration of analog values.

3RK1, 3RK2

From 2/55

3RK1

From 2/65

Slaves (continued)

**I/O modules for use in the control cabinet**

- Degree of protection IP20
- No M12 plugs required for connection
- Especially narrow design for SlimLine Compact modules with widths of 17.5 mm and 22.5 mm
- Analog modules are also available
- Removable, finger-safe terminal blocks that cannot be inadvertently interchanged with the SlimLine Compact Modules
- Flat design of the flat modules for small control cabinets and confined conditions
- Connection with screw terminals or spring-type terminals
- Standard rail mounting and wall mounting possible
- Diagnostics LEDs

Your advantage: Modules enable space-saving use in control cabinets and small local control boxes.



F90 module



Flat module



Counter module



Ground-fault detection module



Overvoltage protection module

Modules with special functionsCounter modules

- Degree of protection IP20
- For evaluation of pulses
- Connection with screw terminals or spring-type terminals

Your advantage: Evaluation of pulses which exceed even the clock frequency of AS-Interface.

Ground-fault detection modules

- Degree of protection IP20
- Display using LEDs
- Two signaling outputs

Your advantage: Automatic diagnostics of ground faults on AS-Interface

Overvoltage protection modules

- Degree of protection IP67
- Discharge through ground cable with oil-proof outer sheath
- Protection at transition of lightning protection zones

Your advantage: The AS-Interface overvoltage protection module protects downstream AS-Interface devices or individual sections in AS-Interface networks from conducted overvoltages.

Article No.

Page

3RG9, 3RK1,
3RK2

From 2/68

3RK1

2/75

3RK1

2/76

3RK1

2/77

Industrial Communication

Introduction

AS-Interface

Slaves (continued)



SIRIUS contactor
3RT203-1NB30-0CCO



SIRIUS 3RA2712 function
module for AS-Interface



3RA61 compact starter



SIRIUS M200D motor
starter

Contactors and contactor assemblies

SIRIUS 3RT contactors, 3-pole up to 250 kW
SIRIUS 3RA23 reversing contactor assemblies, up to 55 kW
SIRIUS 3RA24 contactor assemblies for star-delta (wye-delta) starting, up to 90 kW

- Notable reduction of wiring in the control circuit
- Integrated mechanical interlocking
- Prevention of wiring errors in the main circuit

Article No.

Page

3RT20
3RA23
3RA24

From 3/17
From 3/156
From 3/171

SIRIUS 3RA27 function modules for AS-Interface

- Connection of 3RT20 power contactors with communication capability, 3RA23 reversing contactor assemblies, and 3RA24 contactor assemblies for star-delta (wye-delta) starting to AS-Interface
- Reduction of control current wiring through plug-in design and integrated monitoring of circuit breaker/motor starter protector and contactor
- Reduced space requirement in the control cabinet through fewer digital inputs and outputs in the control system
- Easy configuration through operation of feeders instead of individual contactors
- Enhanced operational reliability and quick wiring thanks to spring-type connections
- Small number of variants through use of identical modules for size S00 to S3 contactors

Your advantage: Shortening of mounting and startup times.

3RA2712

From 3/107

Motor starters for use in the control cabinet

SIRIUS 3RA6 compact starters

3RA61 direct-on-line starters, 3RA62 reversing starters

- Degree of protection IP20
- Very compact load feeders with the integrated functionality of an electronic overload relay
- As direct-on line or reversing starters for motors up to 15 kW/400 V
- Easy expansion into a communication-capable load feeder using AS-i add-on modules
- On-site safe disconnection also possible using AS-i add-on modules
- Standardized integration of the loads in higher-level control systems using AS-i

Your advantage: Compact solution with minimum wiring outlay for actuating direct-on-line and reversing starters in the control cabinet.

3RA6
3RA61
3RA62

From 8/56
8/66
8/67

Motor starters for use in the field, high degree of protection

SIRIUS M200D motor starters for AS-Interface

- High degree of protection IP65 for cabinet-free design
 - As direct-on-line or reversing starters for motors up to 5.5 kW/400 V
 - Mechanical or electronic switching for high switching frequencies
 - Optional with manual operation and brake control
 - Expanded diagnostics and parameterization possible through AS-Interface
 - Easy and consistent integration in STEP 7 through AS-Interface
- Your advantage: The correct solution for all simple applications in conveyor systems with spatially distributed drives.

3RK1

From 9/43

Slaves (continued)

SINAMICS G110M
frequency inverter**SINAMICS G110M distributed inverters**
Wide power range from 0.37 to 4 kW

- Preconfigured with SIMOGEAR
- Rugged, with IP65/IP66 degree of protection, up to 55 °C ambient temperature
- Local commissioning via DIP switch, standard USB interface and potentiometer or Intelligent Operator Panel (IOP)
- Integrated safety functions (STO locally via F-DI or via PROFIsafe)
- Integrated, specific software functionality for conveyor systems
 - Quick stop function for fast reaction times to sensors
 - Limit switch functionality, e.g. for rotary table, corner transfer unit

Your advantage: The simple solution for compact drives with safety requirements in conveyor technology

Article No.	Page
6SL3517 power modules, 6SL3544 control units	Catalog D 31.2
6SL3511	Catalog D 31.2
3SU14 modules 3SU18 enclosure	13/97, 13/113 From 13/107
8WD4	From 13/167

SINAMICS G110D
frequency inverter**SINAMICS G110D distributed inverters**
High degree of protection IP65 for cabinet-free installation

- Wide power range from 0.75 to 7.5 kW
- Easy commissioning and maintenance thanks to standardized plug-in connections for bus, energy and I/Os
- Expanded diagnostics and parameterization through AS-Interface
- Optional maintenance switch
- Optional manual local operation
- Same plugs used as for the M200D motor starter

Your advantage: Easy, consistent implementation of distributed system concepts thanks to scaling of SINAMICS G110D, SINAMICS G120D and SIRIUS M200D products.

Commanding and signaling devicesSIRIUS ACT pushbuttons and indicator lights for AS-Interface

- Modular configuration based on individual specifications, or as enclosure with standard components
- AS-Interface modules for base mounting or mounting in enclosure
- Up to six command points for standard signals or EMERGENCY STOP
- Degree of protection IP66/IP67/IP69K
- Metal or plastic version
- Indicator lights with integrated LED
- Any change of equipment possible even after installation

Your advantage: Complete operating system with simple AS-Interface connection for your plant.

SIRIUS 8WD4 signaling columns

- Many optical and acoustic elements can be combined
- Up to three signaling elements can be connected using an adapter element
- With LEDs or incandescent lamps

Your advantage: Signaling columns for monitoring production sequences and for visual or acoustic warnings in emergency situations, with easy AS-Interface connection.



AS-Interface module



Signaling column

Industrial Communication

Introduction

AS-Interface

Power supply units and data decoupling modules

AS-Interface power supply units generate a controlled direct voltage of 30 V DC with high stability and low residual ripple in conjunction with data decoupling. They are an integral component of the AS-Interface network and enable the simultaneous transmission of data and energy on one cable.

In conjunction with data decoupling modules, AS-Interface can also be operated with standard power supply units.

AS-Interface power supply units

- With wide performance spectrum from 2.6 to 8 A
- Degree of protection IP20
- Separation of data and energy by means of the integrated data decoupling
- UL/CSA approval means the power supplies can be used worldwide, 2.6 A version with output power restricted to max. 100 W (for Class 2 circuits in accordance with NEC)
- Certified for global use
- Integrated ground-fault and overload detection save the need for additional components and make applications reliable
- Diagnostics memory, remote signaling and remote RESET allow fast detection of faults in the system
- Ultra-wide input range enables single- and two-phase applications (8 A version)

Your advantage: Optimum performance for each application.

30 V power supply units

Standard 30 V power supply units without data decoupling

- Power spectrum 3 A, 4 A and 8 A
 - Overload and short-circuit proof in every performance class
 - Diagnostics: With output voltage > 26.5 V DC LED and signaling contact for output voltage 30 V O.K.
 - Primary-side connection to 120/230 V AC (single-phase) with automatic range selection
- Your advantage: Economical alternatives in conjunction with data decoupling modules while making full use of the maximum AS-Interface cable length.

24 V power supply units

Standard 24 V power supply units (SITOP), without data decoupling

- Power spectrum 2.5 to 40 A
 - Overload and short-circuit proof in every performance class
 - Add-on modules for signaling, redundancy, buffering and UPS
 - Single-phase, two-phase and three-phase versions
- Your advantage: Economical alternatives in conjunction with data decoupling modules.

S22.5 data decoupling modules

- Degree of protection IP20, narrow design 22.5 mm
- Supply of several AS-i networks with a single power supply unit
- Single and double data decoupling
- Operation with 24 V DC or 30 V DC

Your advantage: Cost-effective installation of AS-i networks in conjunction with standard power supply units.

DCM 1271 data decoupling modules for SIMATIC S7-1200

- Simple data decoupling in IP20 design
- Supply of several AS-i networks with a single power supply unit
- Operation with 24 V DC or 30 V DC

Your advantage: Cost-effective installation of AS-i networks in conjunction with standard power supply units in the design of a SIMATIC S7-1200 module.



IP20, 3 A



IP20, 8 A



PSN130S
30 V DC, 8 A



SITOP PSU100M,
24 V DC, 20 A



S22.5 data decoupling
module



DCM 1271 data
decoupling module


Transmission media

AS-Interface shaped cables for connection of network stations

AS-Interface shaped cables

- No polarity reversal thanks to trapezoidal shape
- Cables made of optimized material for different operating conditions
- Special version according to UL CLASS 2 available

Your advantage: Fast replacement and connection to AS-Interface by piercing method.



Shaped cable

Article No.	Page
3RX9	2/78
3RX9	From 2/79
6EP	From 15/1
3RK1	From 2/81
3RK7	From 2/83
3RX9	2/85

System components and accessories



Repeater



Compact extension plug

Addressing unit
for AS-Interface V 3.0

Analyzer



M12 sealing cap



Cable terminating piece

Accessories comprise tools for mounting, installation and operating as well as individual components.

Repeaters and extension plugs

- Repeaters for extending the AS-Interface cable by 100 m per repeater
- Extension plug for extending the AS-Interface segment to max. 200 m
- Parallel switching of several repeaters possible (star configuration option)
- Maximum size increases (when combined) to more than 600 m
- Easy mounting
- IP67 module enclosure

Your advantage: Lower infrastructure costs, more possibilities of use and greater freedom for plant planning.

Article No.

Page

6GK1 repeater
3RK1 extension
plug

2/86

2/87

Addressing units

- Reading out and adjusting the slave address 0 to 31 or 1A to 31A, 1B to 31B, with automatic addressing aid and prevention of double addresses
- Reading out the slave profile (IO, ID, ID2) and reading out and setting the ID1 code
- Input/output test when commissioning the slaves, on all digital and analog slaves according to AS-Interface specification V3.0, including safe input slaves and complex CTT2 slaves
- Display of the operational current in case of direct connection of an AS-i slave (measuring range from 0 to 150 mA)
- Storage of complete network configurations (profiles of all slaves) to simplify the addressing

Your advantage: Easiest way to address and test the slaves.

3RK1

From 2/88

AS-Interface analyzer

- Diagnostics units for completely checking the quality and function of an AS-Interface installation
- Transmission of collected data through an RS 232 interface to a PC, evaluation by software
- Easy and user-friendly operation
- Automatically generated test logs
- Advanced trigger functions enable exact analysis
- Process data can be monitored online
- In addition to digital I/O data it is possible to view analog values and safety slaves in data mode.

Your advantage: Preventative testing of an AS-Interface network is possible, recorded logs facilitate remote diagnostics.

3RK1

From 2/90

Miscellaneous accessories

Individual components such as sealing caps, cable adapters, distributors, M12 plugs and cables, AS-Interface System Manual, etc.

3RK1, 3RT1,
3RX9, 6ES7


From 2/94

Industrial Communication

Introduction

AS-Interface

Diagnostics



Diagnostics for AS-Interface via HMI panel

The following diagnostics block with visualization via HMI or web browser for AS-Interface can be downloaded free of charge in the Industry Online Support Portal:

Diagnostics blocks

- For CM AS-i Master ST and F-CM AS-i Safety ST in ET 200SP, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>
- For other Siemens AS-i master and links, see <https://support.industry.siemens.com/cs/ww/en/view/50897766>

Your advantage: Detailed diagnostic display for fast fault analysis and short downtimes – for easy integration into STEP 7 projects.


Article No.

Page

--

--

Software



AS-Interface block library for PCS 7

AS-Interface block library for SIMATIC PCS 7

- Engineering and runtime software
- Easy connection of AS-Interface to PCS 7
- Engineering work reduced to positioning and connecting the blocks in the CFC
- No additional configuring steps required for connection to the PCS 7 Maintenance Station, diagnostics for the AS-i system optimally guaranteed

Your advantage: Easy connection of AS-Interface to PCS 7, little engineering and configuration.

3ZS1635

From 14/19

Connection methods



Screw terminals



Spring-type terminals,
spring-type terminals (push-in)




COMBICON connectors (plug-in screw terminals)

The terminals are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Overview

More information

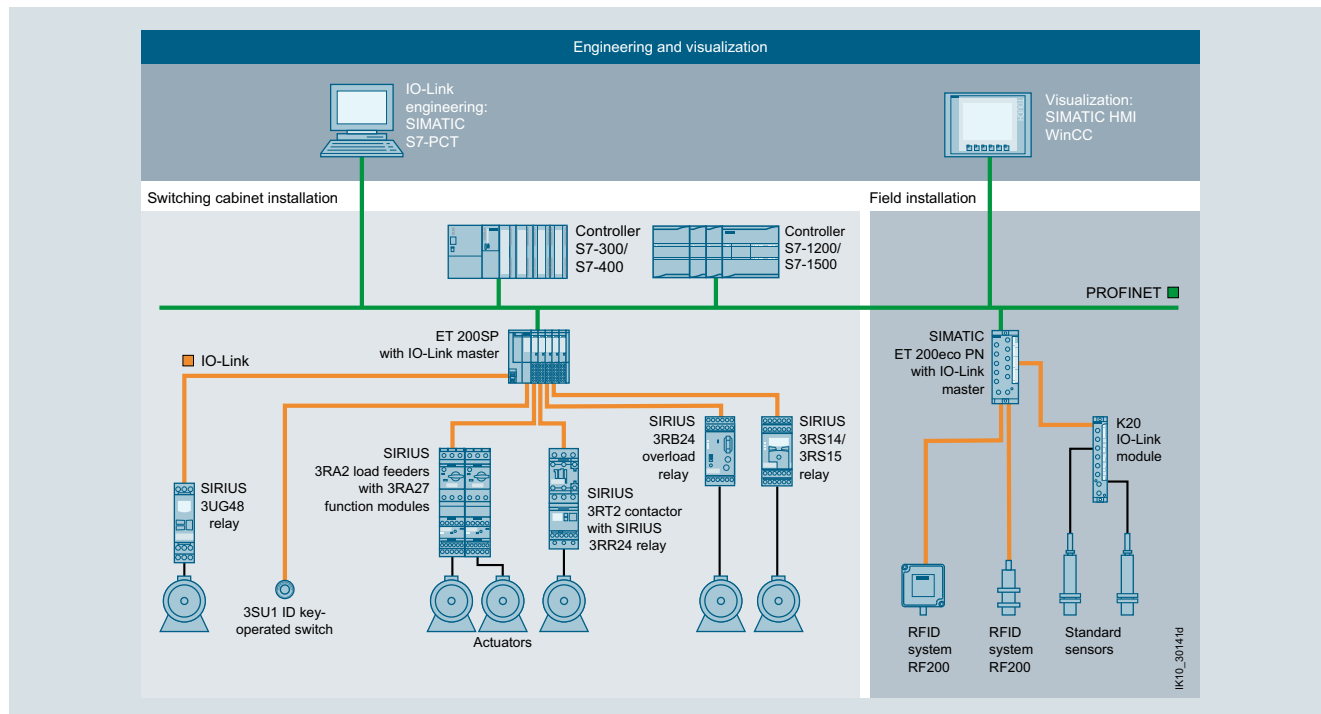Homepage, see www.siemens.com/io-linkFor important topics at a glance, see
<https://support.industry.siemens.com/cs/ww/en/view/109737170>

Engineering and visualization

IO-Link – more than just another interface

IO-Link is an open communication standard for sensors and actuators – defined by the IO-Link Consortium.

IO-Link is a smart concept for the uniform connection of actuators and sensors to the control level by means of a low-cost point-to-point connection.

As an open interface, IO-Link can be integrated into all standard fieldbus and automation systems.

The IO-Link communication standard below fieldbus level enables central error diagnostics and localization down to actuator/sensor level, and facilitates both start up and maintenance by allowing parameter data to be dynamically changed directly from the application.

The increasing intelligence of field devices and their integration into automation as a whole now allows data to be accessed right down to the lowest field level. The result: greater plant availability and less engineering work.

Transparency in the process through IO-Link

High system availability and data transparency are market requirements that must also be met by the connecting of innovative control technology to a control system. A systematic diagnostics concept and efficient handling of parameter data are required for this purpose in automation.

With the aid of the IO-Link communication standard, a communication link is established between switchgear and controller, and this allows data to be exchanged efficiently. Based on a standard cable, it is therefore possible to integrate parameter, process and diagnostic data and measured values into the plant automation with ease. For example, the available diagnostic data allow potential errors to be detected quickly, thus avoiding lengthy plant down times.

As a consequence of their basic function, such as overload protection (SIRIUS 3RB24 electronic overload relays for IO-Link), many controls have measured values. The availability of these via IO-Link now allows conclusions to be drawn at an early stage concerning wear and tear in the application.

At the same time the option of parameterizing via IO-Link supports the device not just when parameters concerning operating time are changed, but also when the device is replaced. In the case of a spare part, for example, the parameters can be quickly transmitted to a new device via the communication system.

Industrial Communication

Introduction

IO-Link

Masters



SM 1278 4xIO-Link
for SIMATIC S7-1200



CM 4xIO-Link
for ET 200SP



IO-Link master module
for ET 200pro



6ES7148-6JA00-0AB0
6ES7148-6JD00-0AB0



CM IO-Link
for ET 200AL

The IO-Link master modules form the heart of the IO-Link system.

IO-Link master module for SIMATIC S7-1200

SM 1278 4xIO-Link master

- IO-Link master as serial communication module with four ports (channels) according to IO-Link specification V1.1
- Easy device exchange with automatic data recovery without engineering for IO-Link device
- Up to four IO-Link devices (3-wire connections) can be connected to each IO-Link master module
- Data transmission rates COM1 (4.8 kBd), COM2 (38.4 kBd), COM3 (230.4 kBd), automatic adjustment to the data transmission rate supported by the device

Your advantage: Easy connection of IO-Link connections to the SIMATIC S7-1200.

Article No.	Page
6ES7	2/104
6ES7	From 2/105
6ES7	2/108
6ES7	From 2/109
6ES7	From 2/111

IO-Link master modules for ET 200SP

CM 4xIO-Link communication module

- IO-Link master as serial communication module with four ports (channels) according to IO-Link specification V1.1
- Module replacement with automatic data recovery without engineering for IO-Link master and device
- Up to four IO-Link devices (3-wire connections) can be connected to each IO-Link master module.
- Data transmission rates COM1 (4.8 kBd), COM2 (38.4 kBd), COM3 (230.4 kBd), automatic adjustment to the data transmission rate supported by the device

Your advantage: Easy connection of IO-Link connections to distributed I/Os.

IO-Link master module for ET 200pro

4 IO-Link HF electronic module

- IO-Link master as serial communication module with four ports (channels) according to IO-Link specification V1.1
- Easy device exchange with automatic data recovery without engineering for IO-Link device
- Up to four IO-Link devices can be connected to each IO-Link master module
- Support of IO-Link Port Class B
- Data transmission rates COM1 (4.8 kBd), COM2 (38.4 kBd), COM3 (230.4 kBd), automatic adjustment to the data transmission rate supported by the device

Your advantage: Easy connection of sensors and actuators to the I/Os directly in the machine's field area.

IO-Link master module for ET 200eco PN

ET 200eco PN IO-Link master

- 4 IO-L + 8 DI + 4 DQ 24 V DC/1.3 A
 - Up to four IO-Link devices (IO-Link Port Class A) can be connected
 - Up to eight standard sensors (8 DI) and up to four standard actuators (4 DQ) can be additionally connected
 - Enclosure width 60 mm
- 4 IO-L
 - Up to four IO-Link devices (IO-Link Port Class B) can be connected
 - Enclosure width 30 mm

Your advantage: Easy connection of sensors and actuators to the I/Os directly in the machine's field area.

IO-Link master module for ET 200AL

CM IO-Link communication module

- IO-Link master as serial communication module with four ports (channels) according to IO-Link specification V1.1
- Easy device exchange with automatic data recovery without engineering for IO-Link device
- Up to four IO-Link devices can be connected to each IO-Link master module
- Support of IO-Link Port Class B
- Data transmission rates COM1 (4.8 kBd), COM2 (38.4 kBd), COM3 (230.4 kBd), automatic adjustment to the data transmission rate supported by the device

Your advantage: Easy connection of sensors and actuators to the I/Os directly in the machine's field area.

Input modules



IO-Link module K20 with eight digital inputs

IO-Link input modules make full use of the potential of IO-Link and are a more attractive solution economically than a direct sensor connection.

K20 IO-Link modules

- Four or eight digital inputs
- Degree of protection IP65/IP67
- Connection sockets in M8/M12
- Contacting protected against polarity reversal

Your advantage: Reduction of mounting and startup times by up to 40%.

Article No.

Page

3RK5

From 2/114

Industrial controls

Starters and contactor assemblies for direct-on-line, reversing and star-delta (wye-delta) starting can be connected to IO-Link through function modules without any additional, complicated wiring.

Contactors and contactor assemblies

SIRIUS 3RT contactors, 3-pole up to 250 kW

SIRIUS 3RA23 reversing contactor assemblies, up to 55 kW

SIRIUS 3RA24 contactor assemblies for star-delta (wye-delta) starting, up to 90 kW

- Notable reduction of wiring in the control circuit
- Integrated mechanical interlocking
- Prevention of wiring errors in the main circuit

SIRIUS contactor
3RT201-1B...-0CC0SIRIUS 3RA2711 function
module for IO-LinkSIRIUS 3RA27 function modules

- Connection of 3RT20 power contactors with communication capability, 3RA23 reversing contactor assemblies, and 3RA24 contactor assemblies for star-delta (wye-delta) starting to IO-Link
- Reduction of control current wiring through plug-in technology, feeder groups and integrated monitoring of circuit breaker/motor starter protector and contactor
- Reduced space requirement in the control cabinet through fewer digital inputs and outputs in the control system
- Simple user program through operation of feeders instead of individual contactors
- Enhanced operational reliability and quick wiring thanks to spring-type connections
- Can be flexibly combined with many automation solutions using the open, standardized IO-Link wiring system
- Small number of variants through use of identical modules for size S00 to S3 contactors

Your advantage: Shortening of mounting and startup times

3RT20
3RA23
3RA24From 3/17
From 3/156
From 3/171

3RA2711

From 3/107

Overload relays

SIRIUS 3RB24 electronic overload relays for IO-Link for high-feature applications

- Diagnostics and current value transmission via IO-Link
- Current measuring modules (3RB29) for current values from 0.3 ... 630 A
- Controlling direct-on-line, reversing and wye-delta starters via IO-Link in conjunction with contactors
- Full motor protection through PTC connection

Your advantage: Communication-capable overload relay enables remote diagnostics and preventative maintenance.

SIRIUS 3RB24 overload
relay

3RB24

From 7/130

Motor starters for use in the control cabinet

3RA64, 3RA65 compact starters for IO-Link

- Integrated functionality of a circuit breaker, contactor and electronic overload relay and various functions of optional mountable accessories
- Can be used for direct starting of standard induction motors up to 32 A (approx. 15 kW/400 V)
- Compact design offers enormous savings in space and wiring in the control cabinet
- Low variance of devices thanks to wide setting ranges for the rated current and wide voltage ranges

Your advantage: The diagnostics data of the process collected by the 3RA6 compact starter, e.g. short circuit, end of service life, limit position, etc., are not only indicated on the compact starter itself but also transmitted to the higher-level control system through IO-Link.

SIRIUS 3RA64 compact
starter3RA6
3RA64
3RA65From 8/56
8/68
8/69

Industrial Communication

Introduction

IO-Link

Industrial controls (continued)



SIIRIUS 3RR24 monitoring relay



SIIRIUS 3UG48 monitoring relay



SIIRIUS 3RS14, 3RS15 temperature monitoring relay



SIIRIUS ACT 3SU1 ID key-operated switch



SIIRIUS ACT 3SU1 electronic module



RFID system for IO-Link

Monitoring relays

SIIRIUS 3RR24 monitoring relays for mounting onto 3RT2 contactors for IO-Link

- Monitoring relays for mounting onto 3RT2 contactors
- Parameterization and diagnostics via the display on the device or via IO-Link
- Adjustable warning and switch-off limit values and on/tripping delay times
- All current measured values available in the control system

Your advantage: Communication-capable monitoring relay enables remote diagnostics and preventative maintenance.

SIIRIUS 3UG48 monitoring relays for stand-alone installation for IO-Link

- Monitoring of
 - Network (3UG481)
 - Voltage (3UG483)
 - Current (3UG4822)
 - Power factor and active current (3UG484)
 - Fault current (3UG4825)
 - Speed (3UG485)

- Parameterization and diagnostics via the display on the device or via IO-Link
- Adjustable warning and switch-off limit values and on/tripping delay times
- All current measured values available in the control system

Your advantage: Communication-capable monitoring relay enables remote diagnostics and preventative maintenance.

SIIRIUS 3RS14, 3RS15 temperature monitoring relays for IO-Link

- Measuring the temperature of solids, liquids and gases
- Use of resistance sensors (3RS14) or thermocouples (3RS15)
- Parameterization and diagnostics via the display on the device or via IO-Link
- Adjustable warning and switch-off limit values and on/tripping delay times
- All current measured values available in the control system

Your advantage: Independent monitoring easily linked to the control system.

SIIRIUS ACT pushbuttons and indicator lights

SIIRIUS ACT 3SU1 ID key-operated switches for IO-Link

- Access system and selection system for four authorization levels
 - Authentication of groups and persons
 - Five ID keys with different coding
 - Option for individual coding via IO-Link
 - For installation in enclosures or fastening on front plate
 - Electronic module for ID key-operated switches must be ordered separately.
- Your advantage: Only authorized personnel can work on plants and machines.

SIIRIUS ACT 3SU1 electronic modules for IO-Link

- Eight digital inputs and outputs possible
- DI and DQ freely selectable (programmable)
- Input and output functions parameterizable
- Connection system (push-in)
- For installation in enclosures or fastening on front plate

Your advantage: No wiring required if ordered in a 3SU1 enclosure via configurator.

Article No.

Page

3RR24

From 10/70

3UG48

From 10/109

3RS14, 3RS15

From 10/143

3SU1

13/10

3SU1400

13/98, 13/113

RFID system






SIMATIC RF200 RFID system in the HF range

Products SIMATIC RF210R, SIMATIC RF220R, SIMATIC RF240R, SIMATIC RF250R, SIMATIC RF260R

- Simple identification tasks such as reading an ID number (UID)
- Reading of user data
- Writing of user data
- No RFID-specific programming, ideal for those new to RFID
- Simple connection via master modules for IO-Link, such as SIMATIC S7-1200, ET 200SP, ET 200pro, ET 200eco PN and ET 200AL
- Use with the tried and tested ISO 15693 transponders (MDS Dxxx)

6GT2

Catalog ID 10

Device Description (IODD)		Article No.	Page
 <p>IODD files for IO-Link</p>	<p>IODD files</p> <p>These files provide the device description for IO-Link devices.</p> <ul style="list-style-type: none"> Comprehensive IODD catalog of SIEMENS IO-Link devices Freely available for download from Industry Online Support, see https://support.industry.siemens.com/cs/ww/en/ps/15851 	--	2/102
 <p>IODDfinder for IO-Link</p>	<p>IODDfinder</p> <p>The entire world of IO-Link under one roof</p> <p>The IODDfinder is a service provided by the IO-Link community. It is a central cross-vendor database for descriptive files (IODDs). In addition, the platform provides an overview of the available IO-Link devices.</p> <p>For more information, see https://ioddfinder.io-link.com/#/.</p>	--	2/102
Software			
 <p>STEP 7 PCT</p>	<p>STEP 7 PCT (Port Configuration Tool)</p> <p>Engineering software for configuring the IO-Link master modules for SIMATIC S7-1200, ET 200SP, ET 200pro, ET 200eco PN and ET 200AL</p> <ul style="list-style-type: none"> Available as a stand-alone version or integrated into STEP 7 (V5.5 SP1 or later) and TIA (V12 or later) Engineering of the IO-Link devices connected to the master Monitoring of the process image of the IO-Link devices Open interface for importing further IODDs Freely available for download from Industry Online Support, see https://support.industry.siemens.com/cs/ww/en/view/32469496 	--	2/102
 <p>IO-Link device function block for TIA Portal</p>	<p>IO-Link function blocks (IO-Link master and IO-Link device)</p> <p>STEP 7 function block for easy acyclical data exchange in the user program</p> <ul style="list-style-type: none"> Freely available for download from Industry Online Support, see https://support.industry.siemens.com/cs/ww/en/view/82981502 	--	2/102
 <p>"Siemens IO-Link Devices" block library</p>	<p>"Siemens IO-Link Devices" block library</p> <p>This library provides function blocks and user-defined data types (UDTs) for all IO-Link devices from the Siemens portfolio. These blocks and UDTs standardize and simplify communication with IO-Link devices.</p> <ul style="list-style-type: none"> Freely available for download from Industry Online Support, see https://support.industry.siemens.com/cs/ww/en/view/90529409 	--	2/102

AS-Interface

Introduction

Communication overview

Overview


AS-Interface is an open, international standard according to EN 50295 and IEC 62026-2 for process and field communication. Leading manufacturers of actuators and sensors all over the world support the AS-Interface. Interested companies are provided with the electrical and mechanical specifications by the AS-Interface Association.

AS-Interface is a single master system. For automation systems from Siemens, there are communications processors (CPs), communications modules (CMs) and routers (links) that control the process or field communication as masters, and actuators and sensors that are activated as AS-Interface slaves.

More information

Homepage, see www.siemens.com/as-interface

Industry Mall, see www.siemens.com/product/as-interface

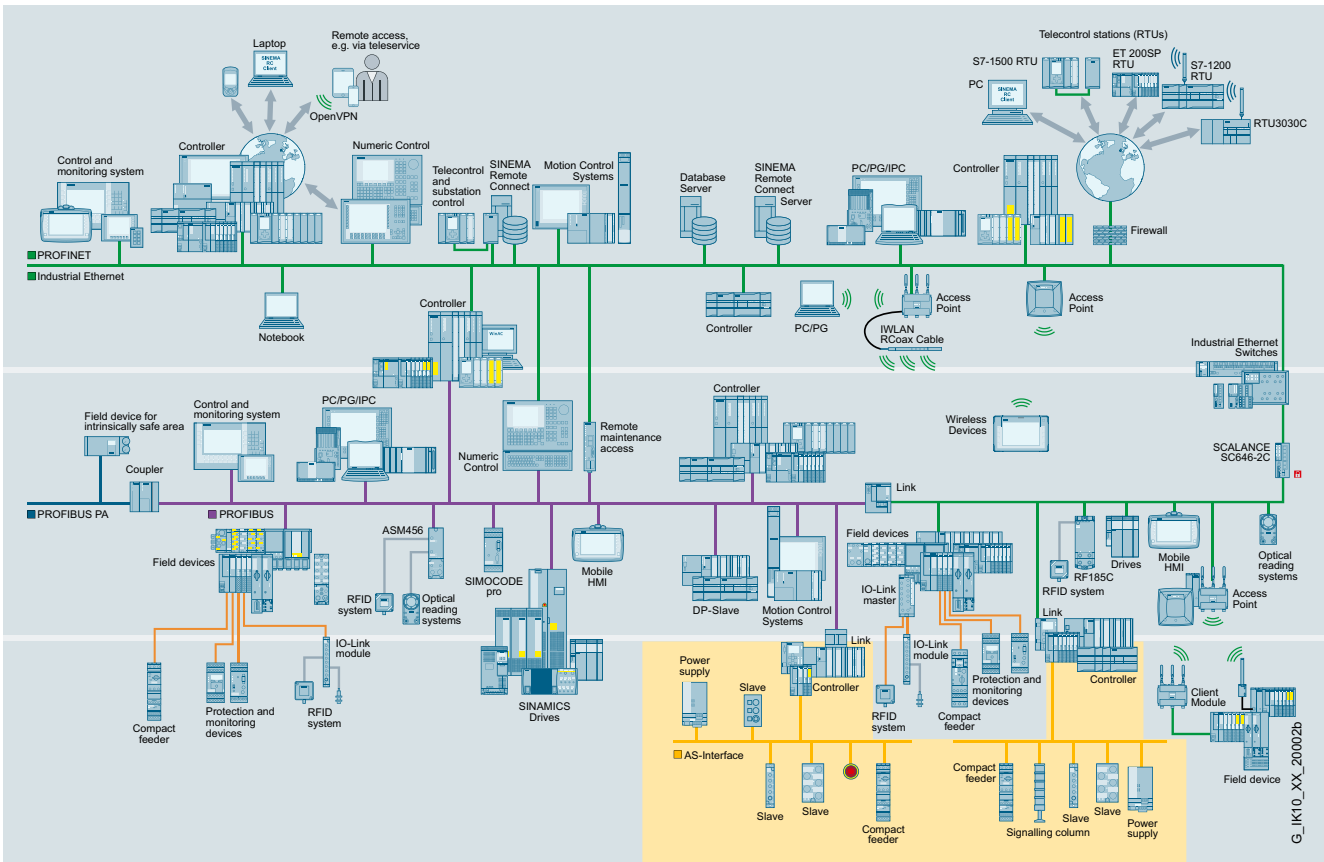

AS-Interface in the SIMATIC NET communications landscape

Benefits

An important characteristic of the AS-Interface technology is the use of a shared two-wire cable for data transmission and distribution of auxiliary power to the sensors and actuators. An AS-i power supply unit or alternatively a standard power supply unit that meets the requirements of the AS-Interface transmission method and has an external AS-i data decoupling module is used for the distribution of auxiliary power. The AS-Interface cable used for the wiring is mechanically coded and hence protected against polarity reversal and can be easily contacted by the insulation piercing method.

Elaborately wired control cables in the control cabinet and marshaling racks can be replaced by AS-Interface.

The AS-Interface cable can be connected to any points thanks to a specially developed cable and connection by the insulation piercing method.

With this concept you become extremely flexible and achieve high savings.

Application

I/O data exchange

The AS-i master automatically transfers the inputs and outputs between the controller and the digital and analog AS-Interface slaves. Slave diagnostics information is forwarded to the control system when required.

The latest AS-Interface masters according to the AS-Interface specification V3.0 support integrated analog value processing. This means that data exchange with analog AS-Interface slaves is just as easy as with digital slaves.

Command interface

In addition to I/O data exchange with binary and analog AS-Interface slaves, the AS-Interface masters can provide a number of other functions through the command interface.


Hence it is possible, for example, for slave addresses to be issued, parameter values transferred or configuration information read out from user programs.

For more information, see <https://support.industry.siemens.com/cs/ww/en/view/51678777>.

Overview

To implement communication, the following components of a system installation are available:

- AS-i modules for central control units such as SIMATIC S7, ET 200M/ET 200SP distributed I/Os, or network transitions from PROFIBUS or PROFINET to AS-Interface
- AS-i power supply unit or alternatively a standard power supply unit in combination with an AS-i data decoupling module for the power supply to the slaves and sensors
- AS-Interface shaped cables
- Network components such as repeaters and extension plugs (cannot be used for AS-i Power24V)
- I/O modules (AS-i slaves) for connection of standard sensors/actuators
- Actuators and sensors with integrated AS-i slave
- Safe I/O modules (ASIsafe slaves) for transmitting safety-related data through AS-Interface
- Addressing device for setting slave addresses during commissioning

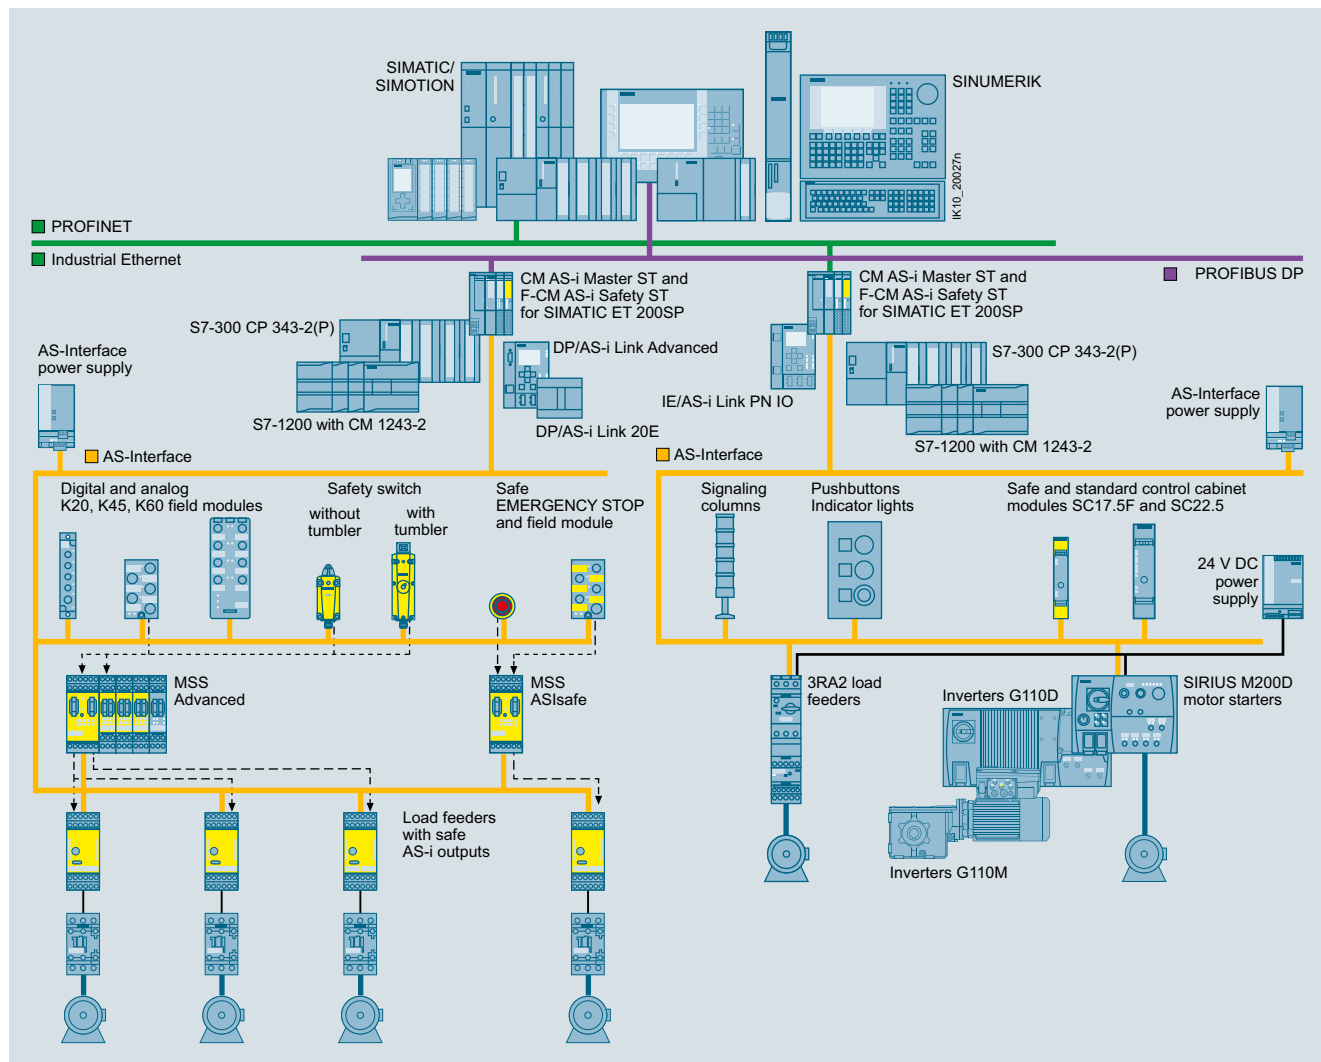

Example of a configuration with the system components

Features

Standard	EN 50295/IEC 62026-2	Maximum cycle time	<ul style="list-style-type: none"> 5 ms in maximum configuration with 31 standard addresses 10 ms in maximum configuration with 62 A/B addresses Profile-specific for slaves with extended data, e.g. analog slaves
Topology	Line, star or tree structure (same as electrical wiring)	Number of stations per AS-Interface line	<ul style="list-style-type: none"> Up to 62 slaves (A/B addressing) Integrated analog value transmission
Transmission medium	Unshielded twisted pair (2 x 1.5 mm ²) for data and auxiliary power	Number of binary sensors and actuators	max. 496 DI / 496 DQ
Connection methods	Contacting of the AS-Interface cable by insulation piercing method	Access control	<ul style="list-style-type: none"> Cyclic polling master/slave procedure Cyclic data acceptance from host (PLC, PC)
Maximum cable length	<ul style="list-style-type: none"> 100 m without repeater 200 m with extension plug 300 m with two repeaters in series connection 600 m with extension plugs and two repeaters parallel switched Longer cable lengths also possible through parallel switching of more repeaters.	Error safeguard	Identification and repetition of faulty message frames

AS-Interface

Introduction

AS-Interface specification

Specification V3.0

Overview

Scope of AS-Interface specification V3.0

Maximum number of slaves			Number of digital inputs	Number of digital outputs
Digital	Analog	ASIsafe	DI	DQ
62	62	31	$62 \times 8 = 496$	$62 \times 8 = 496$

Basic data

- AS-Interface specification 3.0 describes a fieldbus system with an AS-i master and up to 62 AS-i slaves.
- Every AS-i slave with standard addressing occupies one AS-i address (1...31).
- Slaves with extended addressing divide an AS-i address into an A address (1A...31A) and a B address (1B...31B). Up to 62 A/B slaves can be connected accordingly to one AS-Interface network.
- Mixed operation of slaves with standard addressing and extended addressing (A/B slaves) is possible without difficulty. The AS-i master identifies automatically which type of slave is connected, so no special adjustments are required of the user.
- One digital AS-i slave typically has up to four digital inputs and four digital outputs.
- Transmission of the digital input/output data requires max. 5 ms cycle time for 31 slaves; for further values, see "Communication cycle".
- Integrated analog value transmission permits access to both analog values and digital values without the need for any special function blocks.

Communication cycle

Maximum cycle time (digital signals)

- 5 ms with 31 slaves
- 10 ms with 62 slaves
- Up to 20 ms for slaves with A/B address 4 DI / 4 DQ
- Up to 40 ms for slaves with A/B address 8 DI / 8 DQ

Each address is queried in max. 5 ms cycle time. If two A/B slaves are operated on one basic address (e.g. 12A and 12B), a maximum of 10 ms will be required to update the data of both slaves.

Slaves with A/B addressing transmit max. 4 DI / 3 DQ in one cycle.

Slaves with A/B addressing and 4 DI / 4 DQ transmit the output data in two consecutive cycles. The double transmission time of these outputs has no effect in typical applications. The transmission procedure is performed automatically by the AS-i master in accordance with AS-i specification V3.0. These slaves are identified in the selection data with addressing type A/B (spec. V3.0).

Slaves with a single A/B address and 8 DI / 8 DQ transmit the input and output data in four consecutive cycles. The transmission time of the inputs/outputs of these slaves increases accordingly. The transmission procedure is performed automatically by the AS-i master in accordance with AS-i specification V3.0.

The slaves offered by Siemens with 8 DI or 8 DI / 2 DQ use two AS-i addresses so that the time-consuming procedure is not needed and a fast data update is ensured.

All slave types can be mixed and used on a single AS-Interface network.

For more information, such as the addressing type used by the AS-Interface slave (standard or A/B address), see the "Selection and ordering data" for the relevant slave.

Available masters with the latest AS-Interface specification V3.0

- CM AS-i Master ST, F-CM AS-i Safety ST (ET 200SP)
- CM 1243-2 (S7-1200)
- CP 343-2P / CP 343-2 (S7-300 / ET 200M)
- DP/AS-i Link Advanced, DP/AS-Interface Link 20E
- IE/AS-i Link PN IO

More information

More information

System Manual "AS-Interface", see <https://support.industry.siemens.com/cs/ww/en/view/26250840>

Overview



AS-Interface data decoupling modules for AS-i Power24V
Left: S22.5 data decoupling module,
Right: DCM 1271 data decoupling module for SIMATIC S7-1200

Parallel wiring frequently dominates, above all, in applications with very few I/Os. AS-Interface can, however, also replace extensive parallel wiring in small applications at a favorable price.

AS-i Power24V enables an already existing standard 24 V DC power supply unit to be used for the AS-i network.

Data and power in the standard AS-Interface network

One of the great advantages of AS-Interface is the ability to convey not only data, but also the power needed for the connected slaves and sensors over the same unshielded two-conductor cable. This is owed to the service-proven AS-Interface power supply units which provide integrated data decoupling as well as overload and short-circuit protection and integrated ground-fault monitoring.

AS-i Power24V

Instead of the AS-Interface power supply unit (with 30 V output voltage and integrated data decoupling) the AS-i cable is supplied via a data decoupling module from a 24 V standard power supply unit. The communication technology of AS-Interface works at the same high level of quality with an operating voltage of both 30 V DC and 24 V DC.

	Key data of AS-i Power24V
Number of slaves	Up to 62 slaves and up to 31 safe slaves
Topology	Any
Range	Up to 50 m
Components	<ul style="list-style-type: none"> 24 V power supply unit with low residual ripple and limitation to max. 40 V AS-i Power24V-capable data decoupling with integrated ground-fault detection AS-i Power24V-capable masters, slaves and components

Requirements for operation of an AS-i Power24V network

- When 24 V power supply units are used, the maximum network range of 50 m must be observed to reach slaves and sensors with a sufficient level of voltage (at least 18 V).
- The power supply units must comply with the PELV (Protective Extra Low Voltage) or SELV (Safety Extra Low Voltage) standard, have a residual ripple of < 250 mV_{pp}, and must limit the output voltage to a maximum of 40 V in the event of a fault. We recommend SITOP power supplies, [see page 15/1 onwards](#).
- When used in conjunction with standard 24 V power supply units, each AS-Interface network requires AS-i Power24V-capable data decoupling, [see from page 2/81 onwards](#).
- For reliable operation of an AS-i network with 24 V voltage, it is important that the masters, slaves and other components are approved for AS-i Power24V. AS-i Power24V-capable AS-i components can also be used without restriction in standard 30 V AS-i networks.
- Use of repeaters or extension plugs in AS-i Power24V networks is not permitted.


Benefits

In small control cabinets the AS-i power supply unit can be replaced by an AS-i data decoupling module that is connected to an existing 24 V power supply unit.

- The advantages of the AS-i communication system in terms of commissioning, maintenance and diagnostics can be fully exploited.
- If a double data decoupling module is used, two AS-i networks can be supplied.

Application

Configuration of an AS-i Power24V network

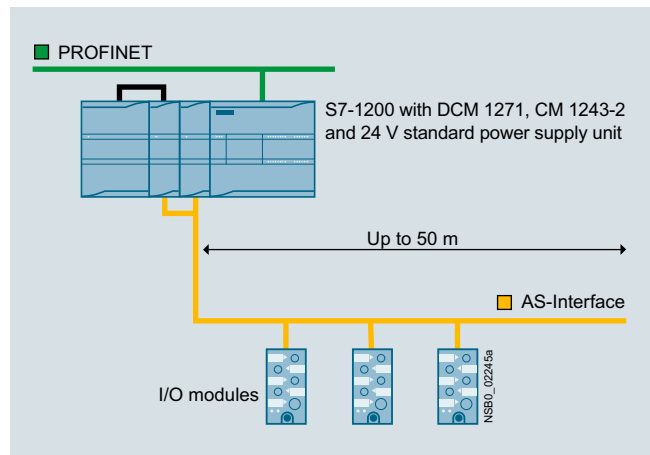

Configuration of an AS-i Power24V network with an AS-Interface DCM 1271 data decoupling module and S7-1200 (simple network)

More information

More information

For a complete overview of AS-i Power24V-capable devices currently available from Siemens, [see https://support.industry.siemens.com/cs/ww/en/view/42806066](https://support.industry.siemens.com/cs/ww/en/view/42806066)

For details of AS-i Power24V, [see "AS-Interface" System Manual, https://support.industry.siemens.com/cs/ww/en/view/26250840](https://support.industry.siemens.com/cs/ww/en/view/26250840)

AS-Interface ASIsafe

Introduction

Overview

ASIsafe – Safety is included

ASIsafe enables the integration of safety-related components such as EMERGENCY STOP pushbuttons, protective door switches, cable-operated switches or other AS-i safety sensors in an AS-Interface network. These are fully compatible with the familiar AS-Interface components (masters, slaves, power supplies, repeaters, etc.) in accordance with IEC 62026-2 and are operated in conjunction with them on the yellow AS-Interface cable.

Tested safety

- Protective door switches
- Cable-operated switches
- Other AS-i safety sensors

The transmission method for safety-related signals is released for applications up to PL e according to EN ISO 13849-1 and up to SIL 3 (IEC 61508/EN 62061).

Higher-level control


As usual, nodes on the AS-Interface bus are controlled in operation by the standard program of the higher-level SIMATIC (F) CPU or by a SINUMERIK control.

AS-i safety solution with F-CPU

Configuring safety functions

In order to implement safe functions, the information from the safe and standard nodes must be combined logically and further parameters set. The configuration of the safety functions depends on which safety solution is being used:

- AS-i safety solution with F-CPU:
In conjunction with the modular safety AS-i master, which is formed by combining the CM AS-i Master ST and F-CM AS-i Safety ST modules in an ET 200SP station, all safety functions and combinations are configured via STEP 7 and processed in the controller (F-CPU) by the fail-safe program.
- In the case of the AS-i safety solution with local evaluation by MSS:
In conjunction with the Modular Safety System all safety functions and combinations are configured using the SIRIUS Safety ES software and processed in the MSS central unit.

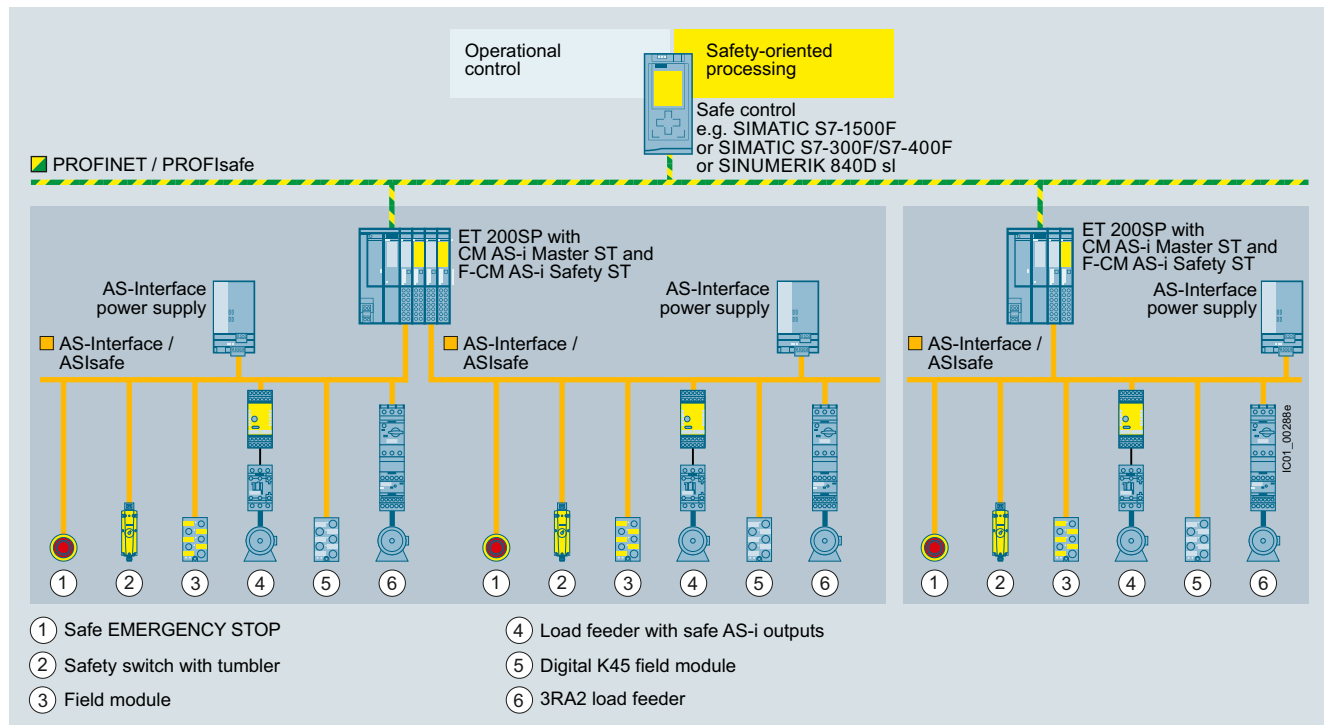

AS-Interface configuration with AS-i Master modules in the ET 200SP


The AS-i communication modules in the ET 200SP facilitate the use of AS-Interface under fail-safe SIMATIC or SINUMERIK controllers.

The allocation of tasks is as follows:

- Acquisition of safety-related signals via safe input slaves on the AS-Interface bus.
Further signals can be detected through other F-DI modules of the SIMATIC.
- Evaluation and processing of signals via the fail-safe SIMATIC or SINUMERIK control
- Reacting by means of safety output modules on the AS-Interface bus or other SIMATIC F-DQ modules

Simple combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules in one ET 200SP station results in a powerful, safety-oriented network transition between PROFINET (or PROFIBUS) and AS-Interface, which can be expanded further in a modular fashion with further I/O modules of the ET 200SP.

Using these design methods, it is possible to create configurations for virtually any application. Besides the single AS-i master, double, triple or generally multiple masters can be realized with or without fail-safe functionality.

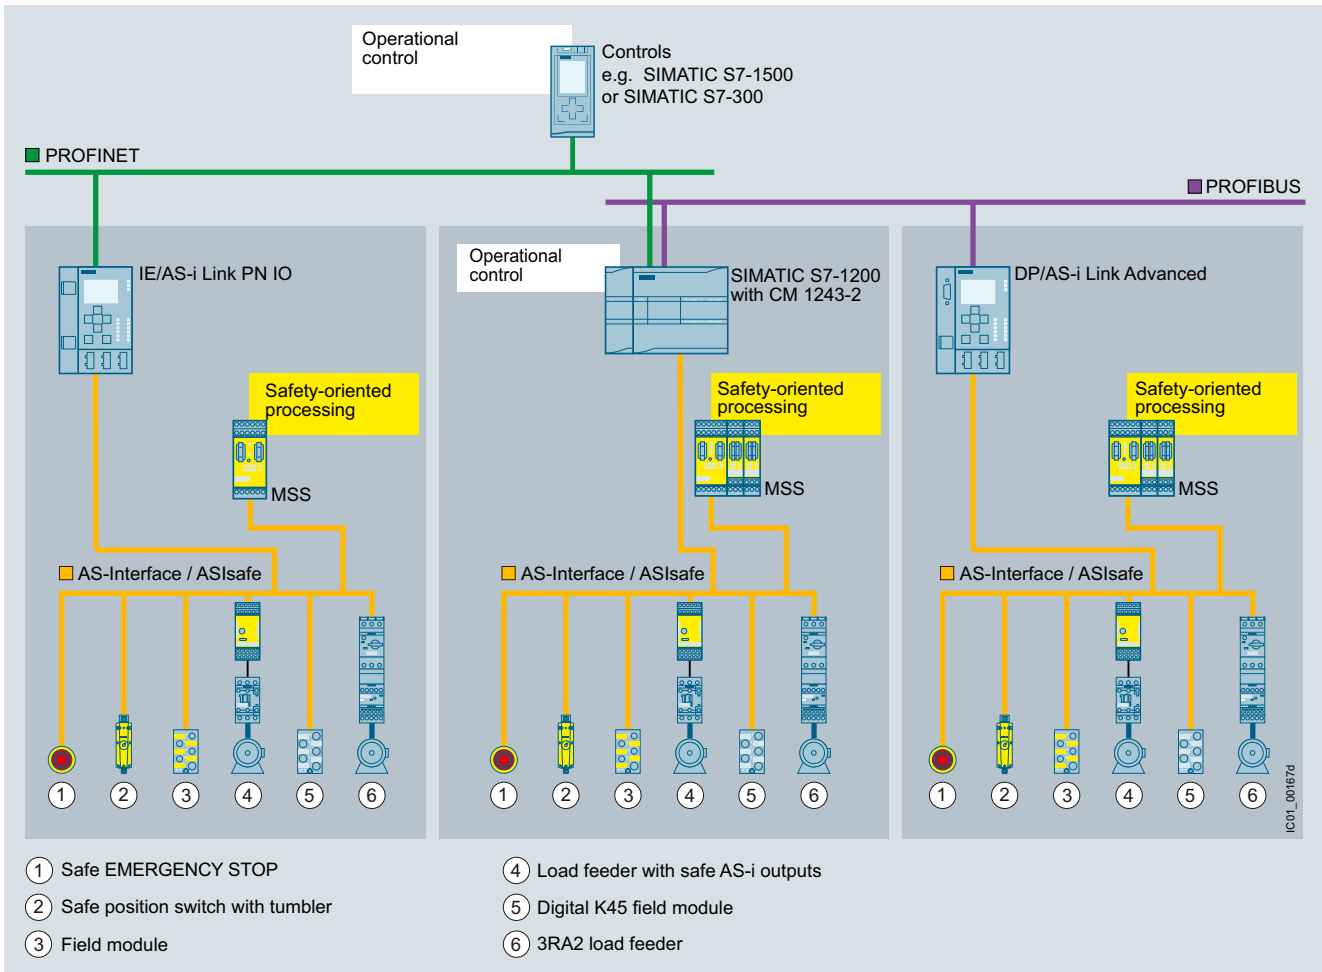AS-i safety solution with local evaluation by MSS**AS-Interface design with 3RK3 Modular Safety System (MSS)**

The local AS-i safety solution uses the 3RK3 Modular Safety System (MSS) for safety-related processing. In this case, one standard controller (i.e. no F-CPU) and one standard AS-i master are sufficient.

The allocation of tasks is as follows:

- Acquisition of safety-related signals via safe input slaves on the AS-Interface bus.
Further signals can be acquired via F-DI inputs of the central unit or the expansion modules of the MSS.

- Evaluation and processing of signals via the central unit of the MSS
- Reaction via safe output modules on the AS-Interface bus or via F-DQ outputs of the central unit or expansion modules of the MSS

Benefits

- Simple system structure thanks to standardized AS-Interface technique
- Safety-related and standard data on the same bus
- Existing systems can be expanded quickly and easily
- Optimum integration in TIA (Safety Diagnostics) and Safety Integrated
- Inclusion of the safety signals in the plant diagnostics, also on existing HMI panels
- Approved to PL e according to EN ISO 13849-1 or SIL 3 according to IEC 61508
- ASIsafe is certified by TÜV (Germany), NRTL (USA) and INRS (France)

Application

Integrated safety technology in the AS-Interface system can be used wherever EMERGENCY STOP buttons, safety gate

interlocks, safety switches, light grids and two-hand operation are installed.


More information**More information**

For further information and typical circuit diagrams on safety engineering, see <https://support.industry.siemens.com/cs/ww/en/view/83150405>

AS-Interface ASIsafe

SIRIUS 3RK3 Modular Safety System

Overview

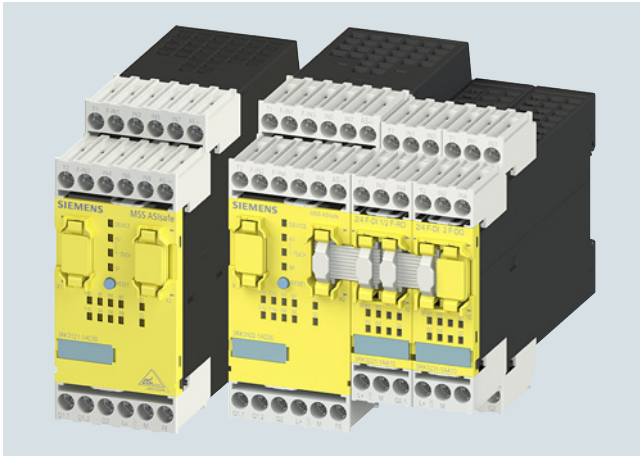

MSS ASIsafe basic (left) and
MSS ASIsafe extended with two expansion modules (right)

The Modular Safety System (MSS) is the centerpiece of ASIsafe Solution local. It allows a safety-related response to signals from the ASIsafe nodes connected in the AS-i network, such as safety input modules, EMERGENCY STOP pushbuttons or safety switches.

The MSS thus supports safety-related applications up to Category 4 according to EN ISO 13849-1 or SIL 3 according to EN 62061.

Safe disconnection takes place via the local safety outputs of the MSS or via the distributed safe AS-Interface outputs in the AS-Interface network.

The safety functions are configured within the MSS using the SIRIUS Safety ES software. The configuration can be transmitted directly in the MSS via the system interface with the aid of a PC cable or memory module. If the DP interface module is used, transmission via PROFIBUS DP is also possible.

The MSS supports a large number of different safety functions. These can be tailored to individual needs in the form of ready-made function blocks.

The safety functions supported include the following:

- EMERGENCY STOP
- Safety shutdown mat
- Protective door monitoring
- Protective door tumbler mechanism
- Approval switches
- Two-hand operator controls
- ESPE monitoring
- Muting
- Mode selector switches

Application

All the MSS that can be used for the AS-Interface bus support the same safety functions. Differences exist in the number of inputs/outputs and expansion modules that can be connected, and hence in the number of independent enabling circuits.

Several MSS can be used on the same AS-Interface bus.

AS-Interface is available in the following versions:

MSS ASIsafe basic

- A total of up to ten independent (two-channel) enabling circuits
 - Two of these enabling circuits via safety outputs integrated into the central unit
 - And another eight enabling circuits via ASIsafe, e.g. with distributed AS-i safety outputs

MSS ASIsafe extended

- A total of up to 20 independent (two-channel) enabling circuits
 - Two of these enabling circuits via safety outputs integrated into the central unit
 - In addition, up to eight enabling circuits via a maximum of two expansion modules
 - And another ten enabling circuits via ASIsafe, e.g. with distributed AS-i safety outputs

MSS Advanced

- A total of up to 50 independent (two-channel) enabling circuits
 - Two of these enabling circuits via safety outputs integrated into the central unit
 - In addition, up to 36 enabling circuits via a maximum of nine expansion modules
 - and another 12 enabling circuits via ASIsafe, e.g. with distributed AS-i safety outputs

Expandability

All versions above can be expanded by adding a DP interface module and a diagnostics module. In addition, various safety and non-safety expansion modules can be selected for the MSS, and these can be used in any combination.

For more information, [see from page 11/30 onwards](#).

Comparison of the three MSS versions

MSS 3RK3	ASIsafe basic	ASIsafe extended	Advanced
Number of independent (two-channel) enabling circuits	2 ... 10	2 ... 20	2 ... 50
Inputs	2 F-DI and 6 DI	4 F-DI and 4 DI (expandable)	8 F-DI (expandable)
Outputs	1 F-DO and 1 F-RO	1 F-DO and 1 F-RO (expandable)	
Number of expansion modules	--	Up to 2	Up to 9
Connection to ASIsafe			
Number of safe AS-i outputs	Up to 8	Up to 10	Up to 12
Number of safe AS-i inputs	Up to 31		


-- Not available

Software for startup, testing and diagnostics: SIRIUS Safety ES

SIRIUS Safety ES is the engineering software for configuration, startup and diagnostics of the 3RK3 Modular Safety System and the 3SK2 safety relays.

All function elements can be positioned using drag & drop. All functions – whether safety or logic functions – are available as blocks and can also be easily combined with one another.

SIRIUS Safety ES makes it possible to test the safety application by forcing. Outputs can be individually set in order to test in advance the reaction of the downstream safety function. In addition, the parameterization can be downloaded to the MSS via PROFIBUS. The integrated macro function allows you to compile a library of your own function elements for reuse in other projects. In addition, the parameterization software is suitable for use as a reliable diagnostics tool: the status of each element as well as the configuration as a whole can be viewed online.

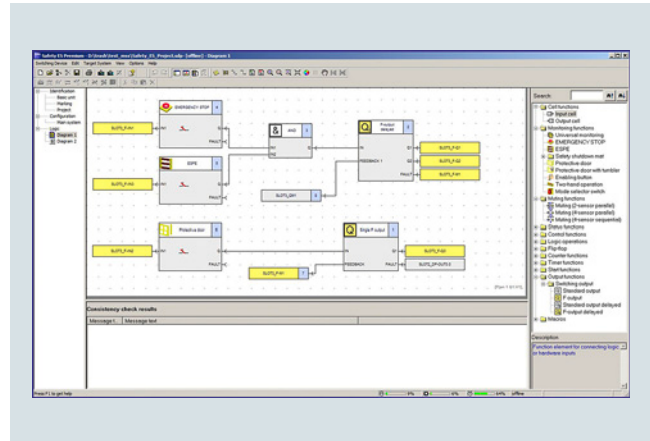

SIRIUS Safety ES user interface showing the ISO diagram display

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 42B

Version

SD

Screw terminals



SD

Spring-type terminals



Article No.

Price
per PU

Article No.

Price
per PU
Central units


3RK3121-1AC00



3RK3121-2AC00

3RK3 ASIsafe basic

Central units for connecting to AS-Interface with safety-related inputs and outputs

- 2 safe inputs
- 6 standard inputs
- 1 two-channel relay output
- 1 two-channel electronic output
- Memory module 3RK3931-0AA00 is included in the scope of supply
- No expansion modules can be connected

2

3RK3121-1AC00

2

3RK3121-2AC00



3RK3122-1AC00



3RK3122-2AC00

3RK3 ASIsafe extended

Central units for connecting to AS-Interface with safety-related inputs and outputs

- 4 safe inputs
- 4 standard inputs
- 1 two-channel relay output
- 1 two-channel electronic output
- Memory module 3RK3931-0AA00 is included in the scope of supply
- Max. 2 expansion modules can be connected

2

3RK3122-1AC00

2

3RK3122-2AC00



3RK3131-1AC10



3RK3131-2AC10

3RK3 Advanced

Central units for connecting to AS-Interface with safety-related inputs and outputs

- 8 safe inputs
- 1 two-channel relay output
- 1 two-channel electronic output
- Memory module 3RK3931-0AA00 is included in the scope of supply
- Max. 9 expansion modules can be connected

2

3RK3131-1AC10

2

3RK3131-2AC10

AS-Interface

ASIsafe

SIRIUS 3RK3 Modular Safety System



PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 42B

Version	SD	Screw terminals	SD	Spring-type terminals	
		Article No.	Price per PU	Article No.	Price per PU



Expansion modules

 3RK3211-1AA10	 3RK3211-2AA10	4/8 F-DI Safety-related input modules • 8 inputs	2	3RK3211-1AA10	2	3RK3211-2AA10
 3RK3221-1AA10	 3RK3221-2AA10	2/4 F-DI 1/2 F-RO Safety-related input/output modules • 4 inputs • 2 single-channel relay outputs	2	3RK3221-1AA10	2	3RK3221-2AA10
 3RK3231-1AA10	 3RK3231-2AA10	2/4 F-DI 2 F-DO Safety-related input/output modules • 4 inputs • 2 two-channel electronic outputs	2	3RK3231-1AA10	2	3RK3231-2AA10
 3RK3251-1AA10	 3RK3251-2AA10	4/8 F-RO Safety-related output modules • 8 single-channel relay outputs	2	3RK3251-1AA10	2	3RK3251-2AA10
 3RK3242-1AA10	 3RK3242-2AA10	4 F-DO Safety-related output modules • 4 two-channel electronic outputs	2	3RK3242-1AA10	2	3RK3242-2AA10
 3RK3321-1AA10	 3RK3321-2AA10	8 DI Standard input module • 8 inputs	2	3RK3321-1AA10	2	3RK3321-2AA10
 3RK3311-1AA10	 3RK3311-2AA10	8 DQ Standard output module • 8 electronic outputs	2	3RK3311-1AA10	2	3RK3311-2AA10

Interface modules

 3RK3511-1BA10	 3RK3511-2BA10	DP interface PROFIBUS DP interface, 12 Mbps, RS 485, cyclic and acyclic data exchange	2	3RK3511-1BA10	2	3RK3511-2BA10
--	--	---	---	----------------------	---	----------------------

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Connection cables (essential accessory)						
 3UF7932-0AA00-0	For connection of					
	Central units with expansion modules or interface module	Diagnostics modules with central unit or interface module				
	✓	✓	• Length 0.025 m (flat)	▶	3UF7930-0AA00-0	1 1 unit 42J
	--	✓	• Length 0.1 m (flat)	▶	3UF7931-0AA00-0	1 1 unit 42J
	--	✓	• Length 0.15 m (flat)	▶ NEW	3UF7934-0AA00-0	1 1 unit 42J
	--	✓	• Length 0.3 m (flat)	▶	3UF7935-0AA00-0	1 1 unit 42J
	--	✓	• Length 0.5 m (flat)	▶	3UF7932-0AA00-0	1 1 unit 42J
	--	✓	• Length 0.5 m (round)	▶	3UF7932-0BA00-0	1 1 unit 42J
	--	✓	• Length 1.0 m (round)	▶	3UF7937-0BA00-0	1 1 unit 42J
	--	✓	• Length 2.5 m (round)	▶	3UF7933-0BA00-0	1 1 unit 42J
Operating and monitoring modules for 3RK3						
 3SK2611-3AA00	Diagnostics module	2	3SK2611-3AA00	1	1 unit	41L
	For direct display of errors, e.g. of cross-circuits					
Additional accessories for MSS, see page 11/40.						

✓ Available

-- Not available

More information

More information




Modular safety system (MSS), see from page 11/30 onwards
 SIRIUS Safety ES software, see from page 14/22 onwards

Manuals for the Modular Safety System (MSS), see
<https://support.industry.siemens.com/cs/ww/en/view/26493228>


AS-Interface ASIsafe

AS-Interface safety monitors

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RK1105-1BE04-0CA0		Basic safety monitors	Screw terminals 			
		Version 3 With screw terminals, removable terminals, width 45 mm				
	2	• 1 enabling circuit (monitor type 1)	3RK1105-1AE04-0CA0	1	1 unit	42C
	2	• 2 enabling circuits (monitor type 2)	3RK1105-1BE04-0CA0	1	1 unit	42C
		Expanded safety monitors				
		Version 3 With screw terminals, removable terminals, width 45 mm				
	2	• 1 enabling circuit (monitor type 3)	3RK1105-1AE04-2CA0	1	1 unit	42C
	2	• 2 enabling circuits (monitor type 4)	3RK1105-1BE04-2CA0	1	1 unit	42C
		Expanded safety monitor with integrated safe slave				
		Version 3 With screw terminals, removable terminals, width 45 mm				
	2	• 2 enabling circuits including control of a safe AS-i output/safe coupling (monitor type 6)	3RK1105-1BE04-4CA0	1	1 unit	42C
		Basic safety monitors	Spring-type terminals 			
		Version 3 With spring-type terminals, removable terminals, width 45 mm				
	2	• 1 enabling circuit (monitor type 1)	3RK1105-1AG04-0CA0	1	1 unit	42C
	2	• 2 enabling circuits (monitor type 2)	3RK1105-1BG04-0CA0	1	1 unit	42C
		Expanded safety monitors				
		Version 3 With spring-type terminals, removable terminals, width 45 mm				
	2	• 1 enabling circuit (monitor type 3)	3RK1105-1AG04-2CA0	1	1 unit	42C
	2	• 2 enabling circuits (monitor type 4)	3RK1105-1BG04-2CA0	1	1 unit	42C
		Expanded safety monitor with integrated safe slave				
		Version 3 With spring-type terminals, removable terminals, width 45 mm				
	2	• 2 enabling circuits including control of a safe AS-i output/safe coupling (monitor type 6)	3RK1105-1BG04-4CA0	1	1 unit	42C

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RK1901-5AA00	2	ASIsafe CD Included in the scope of supply: • ASIMON V3 configuration software on CD ROM, for PC with Windows operating system	3RK1802-2FB06-0GA1	1	1 unit	42C
	►	Cable sets Included in the scope of supply: • PC configuration cable for communication between PC (serial interface) and safety monitor, length approx. 1.50 m • Transfer cable between two safety monitors, length approx. 0.25 m	3RK1901-5AA00	1	1 unit	42C
	5	Sealable covers For securing against unauthorized configuration of the safety monitor	3RP1902	1	5 units	41H
	5	Push-in lugs For screw fixing	3RP1903	1	10 units	41H

Overview



AS-Interface safety modules: K45F (left), K20F (center) and SC17.5F (right)



S45F SlimLine module, safe AS-i output

Safety modules for AS-Interface (ASIsafe modules) are available for field use in degree of protection IP67 (K20F and K45F compact modules) and for the control cabinet (SC17.5F SlimLine Compact modules) in degree of protection IP20.

A very compact module with an optimum price/performance ratio is thus available for every application.

All modules for the connection of (mechanical) switches and safety sensors with contacts feature crossover monitoring of the connected sensor line.

AS-Interface safety modules

The following modules are available for selection:

K20F compact safety modules for operation in the field

Being only 20 mm wide, the K20F module is particularly well suited for applications where modules need to be arranged in the most confined of spaces. The K20F modules are connected to the AS-Interface with a round cable with M12 cable box instead of with the AS-Interface flat cable. This enables extremely compact installation. The flexibility of the round cable means that it can also be used on moving machine parts without any problems. The K20 modules are also ideal for such applications as their non-encapsulated design makes them particularly light in weight.

K45F compact safety modules for use in the field

The platform of the K45F modules covers the connection of ("mechanical") switches/safety sensors with contacts:

- K45F 2 F-DI: Two safety-related inputs in operation up to Category 2 according to EN ISO 13849-1. If Category 4 is required, a two-channel input is available on the module.
- K45F 2 F-DI / 2 DQ: There are also two standard outputs in addition to the safe inputs. Supplied from the yellow AS-i cable
- K45F 2 F-DI / 2 DQ U_{aux} : same as K45F 2 F-DI/2 DQ, but supplied from the black 24 V DC cable
- K45F 4 F-DI: Four safety-related inputs in operation up to Category 2, two for Category 4. Extremely compact double slave (uses two standard AS-i addresses)

SC17.5F SlimLine Compact safety modules with a width of just 17.5 mm for use in control cabinets and local control boxes

With a width of only 17.5 mm, the safe SlimLine Compact modules SC17.5F are ideal for space-saving use in a control cabinet. The modules have more than two safety inputs for connecting signals to ASIsafe networks in the control cabinet. For operation up to Category 2, both inputs can be separately assigned; if Category 4 is required, a two-channel input is available on the module.

There are also two module variants which have two standard outputs in addition to the two safety inputs. The outputs are supplied either from the yellow AS-Interface cable alone, or via auxiliary voltage from the black 24 V DC cable. The supply voltage is set via a slide switch on the rear of the device.

When using several modules, they can be connected simply via the optional device connector. This simplifies the wiring. The yellow AS-i bus cable and the 24 V DC auxiliary voltage U_{aux} then only need to be connected to one module.

AS-Interface ASIsafe

AS-Interface safety modules

S45F SlimLine safety modules with safety outputs for the safe distributed disconnection of actuators

With the S45F SlimLine safety module, a safe output signal of the ET 200SP module F-CM AS-i Safety ST can be used for distributed safety-related disconnection via ASIsafe.

To this end, the S45F module has a safety-related two-channel relay output. As an additional possibility the module offers normal switching of the output using an AS-i standard output bit.

The module has three digital inputs and two digital outputs for the additional connection of sensors and actuators. These can be used, among other things, for the required monitoring of downstream contactors of the feedback circuit.

The S45F module can also be controlled in a safety-related manner, for example by the modular 3RK3 ASIsafe/Advanced safety system. The module contains an AS-i slave for the non-safety-related inputs/outputs.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
K20F compact safety modules						
Slave addressing type: Standard address						
I/O type	U_{aux} 24 V					
2 F-DI	--	2	3RK1205-0BQ30-0AA3	1	1 unit	42C
K45F compact safety modules						
Slave addressing type: Standard address (modules supplied without mounting plate)						
I/O type	U_{aux} 24 V					
2 F-DI	--	▶	3RK1205-0BQ00-0AA3	1	1 unit	42C
4 F-DI ¹⁾	--	2	3RK1205-0CQ00-0AA3	1	1 unit	42C
2 F-DI / 2 DQ	--	5	3RK1405-0BQ20-0AA3	1	1 unit	42C
2 F-DI / 2 DQ	--	5	3RK1405-1BQ20-0AA3	1	1 unit	42C
SC17.5F SlimLine Compact safety modules						
Slave addressing type: Standard address						
I/O type	Outputs					
2 F-DI	--	2	3RK1205-0BE00-2AA2	1	1 unit	42C
2 F-DI	--	2	3RK1205-0BG00-2AA2	1	1 unit	42C
2 F-DI / 2 DQ	U_{ASi}/U_{aux} supply selectable	2	3RK1405-2BE00-2AA2	1	1 unit	42C
2 F-DI / 2 DQ	U_{ASi}/U_{aux} supply selectable	2	3RK1405-2BG00-2AA2	1	1 unit	42C
S45F SlimLine safety module						
(with safe AS-i output)						
I/O type	U_{aux} 24 V					
1 F-RQ / 3 DI / 2 DQ	✓	2	3RK1405-1SE15-0AA2	1	1 unit	42C
1 F-RQ / 3 DI / 2 DQ	✓	2	3RK1405-1SG15-0AA2	1	1 unit	42C

✓ Available or possible

-- Not available or not possible

¹⁾ Module occupies two AS-Interface addresses














The existing SlimLine series of I/O modules for use in the control cabinet and local control boxes is being replaced by the new SlimLine Compact series. We recommend that these new devices are used in future.

For the conversion table, [see page 2/72](#).

Note:

The previous SlimLine devices are still available for use as replacements in existing systems. As a result of the innovation, the new SlimLine Compact devices are not fully compatible in terms of either mechanical dimensions or electrical properties.

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Accessories for compact safety modules						
 3RK1901-2EA00	K45 mounting plates For mounting K45F					
	<ul style="list-style-type: none"> For wall mounting For standard rail mounting 					
		▶ 3RK1901-2EA00		1	1 unit	42C
		▶ 3RK1901-2DA00		1	1 unit	42C
 3RK1901-1AA00	Input bridges for K45F					
	<ul style="list-style-type: none"> Black version Red version 					
	2	3RK1901-1AA00		1	1 unit	42C
	30	3RK1901-1AA01		1	1 unit	42C
 3RK1901-1KA00	AS-Interface sealing caps M12 For free M12 sockets					
		▶ 3RK1901-1KA00		100	10 units	42C
 3RK1901-1KA01	AS-Interface M12 sealing caps, tamper-proof For free M12 sockets					
	2	3RK1901-1KA01		100	10 units	42C
Accessories for SlimLine Compact safety modules						
 3RK1901-1YA00 3RK1901-1YA01	Device connectors For the electrical connection of SlimLine Compact modules (connects AS-i bus cable and 24 V DC auxiliary power supply U_{aux} when using several SlimLine Compact modules)					
	<ul style="list-style-type: none"> Width 17.5 mm Width 22.5 mm 					
	2	3RK1901-1YA00		1	1 unit	42C
	2	3RK1901-1YA10		1	1 unit	42C
 3RK1901-1YA00 3RK1901-1YA01	Device termination connectors Required for the last module in the network					
	<ul style="list-style-type: none"> Width 17.5 mm Width 22.5 mm 					
	2	3RK1901-1YA01		1	1 unit	42C
	2	3RK1901-1YA11		1	1 unit	42C
 3ZY1121-2BA00	Removable terminals					
	<ul style="list-style-type: none"> Screw terminals up to 2 x 1.5 mm² or 1 x 2.5 mm² <ul style="list-style-type: none"> - 2-pole - 4-pole 					
	2	3ZY1121-1BA00		1	6 units	41L
	2	3ZY1141-1BA00		1	6 units	41L
 3ZY1121-2BA00	<ul style="list-style-type: none"> Push-In terminals up to 2 x 1.5 mm² <ul style="list-style-type: none"> - 2-pole - 4-pole 					
	2	3ZY1121-2BA00		1	6 units	41L
	2	3ZY1141-2BA00		1	6 units	41L
 3ZY1450-1BA00	Hinged cover NEW Replacement for SlimLine Compact module, without terminal labeling, width 17.5 mm, yellow					
	2	3ZY1450-1BA00		1	1 unit	41H
 3ZY1450-1BA00	Push-in lugs for wall mounting Two lugs are required per device					
	2	3ZY1311-0AA00		1	10 units	41L
 3RT2900-1SB20	Coding pins for removable terminals For mechanical coding of the terminals					
	2	3ZY1440-1AA00		1	12 units	41L
 3RT2900-1SB20	Blank labels Unit labeling plates ¹⁾					
	<ul style="list-style-type: none"> 10 mm x 7 mm, titanium gray 20 mm x 7 mm, titanium gray 					
	20	3RT2900-1SB10		100	816 units	41B
	20	3RT2900-1SB20		100	340 units	41B
 3RA2908-1A	Tools for opening spring-type terminals					
	Screwdriver for SIRIUS devices with spring-type terminals 3.0 mm x 0.5 mm, length approx. 200 mm, titanium gray/black, partially insulated					
	2	3RA2908-1A		1	1 unit	41B

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/16).

More information

More information

For the "SlimLine Compact Modules" Manual, see <https://support.industry.siemens.com/cs/ww/en/view/109481489>

AS-Interface

Masters

Masters for SIMATIC S7

CM 1243-2

Overview



CM 1243-2 communication module for S7-1200

The CM 1243-2 communication module is the AS-Interface master for the SIMATIC S7-1200 and has the following features:

- Connection of up to 62 AS-Interface slaves
- Integrated analog value transmission
- Supports all AS-Interface master functions in accordance with the AS-Interface specification V3.0
- Indication of the operating state on the front of the device displayed via LED
- Display of operating mode, AS-Interface voltage faults, configuration faults and peripheral faults via LED behind the front panel
- Compact enclosure in the design of the SIMATIC S7-1200
- Suitable for AS-i Power24V and for AS-Interface with 30 V voltage: A standard 24 V power supply unit can be used in combination with the optional DCM 1271 data decoupling module.
- Configuration and diagnostics via the TIA portal

Design

The CM 1243-2 communication module is positioned to the left of the S7-1200 CPU and linked to the S7-1200 via lateral contacts.

It has:

- Terminals for two AS-i cables (internally jumpered) via two screw terminals each respectively
- One terminal for connection to the functional ground
- LEDs for indication of the operating state and fault statuses of the connected slaves

The screw terminals (included in scope of supply) can be removed to facilitate installation.

Benefits

- More flexibility and versatility in the use of SIMATIC S7-1200 as the result of a significant increase in the number of digital and analog inputs/outputs available
- Very easy configuration and diagnostics of the AS-Interface via the TIA Portal (STEP 7 V11+SP2 or higher)
- Simple operation with AS-Interface power supply ([see page 2/78](#)) possible without restrictions.
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is supplied through an existing 24 V DC PELV power supply unit. For decoupling, the AS-i DCM 1271 data decoupling module is required, [see "Accessories" and page 2/83](#).
- LEDs for indication of fault statuses for fast diagnostics
- Monitoring of AS-Interface voltage facilitates diagnostics

Function

The CM 1243-2 supports all specified functions of the AS-Interface specification V3.0.

The values of the digital AS-i slaves can be activated via the process image of the S7-1200. During configuration of the slaves in the TIA Portal, the values of the analog AS-i slaves can also be accessed directly in the process image.

It is also possible to exchange all data of the AS-i master and the connected AS-i slaves with the S7-1200 via the data record interface.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM 1243-2 in the TIA Portal.

The optional DCM 1271 data decoupling module ([see page 2/33](#)) has an integrated detection unit for detecting ground faults on the AS-Interface cable. The integrated overload protection also disconnects the AS-Interface cable if the drive current required exceeds 4 A. For more information on DCM 1271, [see page 2/83](#).

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, [see www.siemens.com/industrialsecurity](http://www.siemens.com/industrialsecurity).

Configuration

To configure CM 1243-2, you require STEP 7 V11 + SP2 or higher.

For STEP 7 V11 + SP2 or higher, the additional Hardware Support Package for CM 1243-2 is required. This is available via the Industry Online Support Portal, [see https://support.industry.siemens.com/cs/ww/en/view/72341852](https://support.industry.siemens.com/cs/ww/en/view/72341852).

The software enables user-friendly configuration and diagnostics of the AS-Interface master and any connected slaves.

Alternatively, you can also apply the AS-Interface ACTUAL configuration at the "touch of a button" via the control panel integrated in the TIA Portal/STEP 7.

When operated on an S7-1200 CPU with firmware version V4.0 or higher, the firmware version V1.1 (or higher) is required for the CM 1243-2.

Application

The CM 1243-2 is the AS-Interface master connection for the 12xx CPUs of the SIMATIC S7-1200. Through connection to AS-Interface, the number of digital inputs and outputs available for the S7-1200 is greatly increased (max. 496 DI/496 DQ on the AS-Interface per CM).

The integrated analog value processing also makes the analog values available at the AS-Interface for the S7-1200. Up to 31 analog slaves with a standard address (each with up to four channels) or up to 62 analog slaves with an A/B address (each with up to two channels) are possible per CM.

Operating conditions

- The CM 1243-2 communication module exchanges data with the S7-1200 CPU with a cycle time of 10 ms.
- The AS-i cycle time depends on the AS-i bus capacity and is up to 5 ms in the case of 31 slaves addresses; for more information, see [Manual "AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module"](#), <https://support.industry.siemens.com/cs/ww/en/view/57358958>.
- For calculation of the maximum switching frequency at inputs/outputs of AS-i slaves, these cycle times and the runtime of the user program must be added up.

Selection and ordering data

Version	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		



3RK7243-2AA30-0XB0

CM 1243-2 communication module

- AS-Interface masters for SIMATIC S7-1200
- Corresponds to AS-Interface specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W x H x D / mm): 30 x 100 x 75

2	3RK7243-2AA30-0XB0	1	1 unit	42C
---	--------------------	---	--------	-----

Note:

The CM 1243-2 communication module is available as a SIPLUS version under Article No. 6AG1243-2AA30-7XB0 in the extended temperature range (from -25 to 70 °C) and for use in harsh environmental conditions (coated according to environment standard IEC 60721).

For more information, see www.siemens.com/siplus-extreme.

Accessories

Version	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		



3RK7271-1AA30-0AA0

DCM 1271 data decoupling module

- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W x H x D / mm): 30 x 100 x 75

Screw terminals (replacement)

- 5-pole
For AS-i master CM 1243-2 and AS-i DCM 1271 data decoupling module
- 3-pole
For AS-i DCM 1271 data decoupling module for connecting the power supply unit

2	3RK7271-1AA30-0AA0	1	1 unit	42C
---	--------------------	---	--------	-----

5	3RK1901-3MA00	1	1 unit	42C
---	---------------	---	--------	-----

5	3RK1901-3MB00	1	1 unit	42C
---	---------------	---	--------	-----

More information

More information

Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/15750/man>

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser; see
<https://support.industry.siemens.com/cs/ww/en/view/61892138>.

AS-Interface

Masters

Masters for SIMATIC S7

CP 343-2P/CP 343-2

Overview



CP 343-2P/CP 343-2

The CP 343-2P communications processor is the AS-Interface master for the SIMATIC S7-300 and the ET 200M distributed I/O station, with user-friendly parameterizing options.

The CP 343-2 is the basic version of the module.

The CP 343-2P/CP 343-2 has the following characteristics:

- Connection of up to 62 AS-Interface slaves
- Integrated analog value transmission
- Support of all AS-Interface master functions in accordance with the AS-Interface specification V3.0
- Status displays of operating states and indication of the readiness for operation of connected slaves by means of LEDs in the front panel
- Fault indications (including AS-Interface voltage errors, configuration errors) by means of LEDs on the front plate.
- Compact enclosure in the design of the SIMATIC S7-300
- Suitable for AS-i Power24V (from product version 2 / firmware version 3.1) and for AS-Interface with 30 V voltage
- Additionally for CP 343-2P: Supports the configuration of the AS-Interface network with STEP 7 V5.2 and higher

Design

The CP 343-2P/CP 343-2 is connected like an I/O module to the S7-300. It has:

- Two terminal connections for connecting the AS-Interface cable directly.
- LEDs in the front panel for indicating the operating state and the readiness for operation of all connected and activated slaves
- Pushbuttons for switching over the master operating state and for adopting the existing ACTUAL configuration of the AS-i slave as the TARGET configuration

Function

The CP 343-2P/CP 343-2 supports all specified functions of the AS-Interface specification V3.0.

The CP 343-2P / CP 343-2 each occupy 16 bytes in the I/O address area of the SIMATIC S7-300. The digital I/O data of the standard slaves and A slaves is saved in this area. The digital I/O data of the B slaves and the analog I/O data can be accessed with the S7 system functions for read/write data records.

If required, master calls can be performed with the command interface, e.g. read/write parameters, read/write configuration.

For more information, see

<https://support.industry.siemens.com/cs/ww/en/view/51678777>.

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, see www.siemens.com/industrialsecurity.

Configuration

All connected AS-Interface slaves are configured at the press of a button. No further configuration of the CP is required.

Additionally for CP 343-2P

The CP 343-2P also supports configuring of the AS-Interface network with STEP 7 V5.2 and higher. Specifying the AS-i configuration in HW-Config facilitates the setting of slave parameters and documentation of the plant. Uploading the ACTUAL configuration of an already configured AS-Interface network is also supported. The saved configuration cannot be overwritten at the press of a button and is therefore tamper-proof.

Benefits

- Shorter startup times through simple configuration at the press of a button
- Design of flexible machine-related structures using the ET 200M distributed I/O system
- Provides diagnostics of the AS-Interface network
- Well suited also for complex applications thanks to connection options for 62 slaves and integral analog value processing
- Reduction of standstill and servicing times in the event of a fault thanks to the LED indicators:
 - Status of the AS-Interface network
 - Slaves connected and their readiness for operation
 - Monitoring of the AS-Interface voltage
- Lower costs for stock keeping and spare parts inventory because the CP can be used for the SIMATIC S7-300 and also for the ET 200M
- Additionally for CP 343-2P: Improved plant documentation and support for service assignments thanks to a description of the AS-Interface configuration in the STEP 7 project
- Simple operation with AS-Interface power supply (see [page 2/78](#)) possible without restrictions.
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is supplied through an existing 24 V DC PELV power supply unit. An S22.5 AS-i data decoupling module (e.g. 3RK1901-1DE12-1AA0) is required for the decoupling, see [page 2/81](#).

Application



The CP 343-2P/CP 343-2 is the AS-Interface master connection for the SIMATIC S7-300 and the ET 200M.

Through connection to AS-Interface it is possible to access max. 248 DI/248 DQ per CP, using 62 A/B slaves with 4 DI/4 DQ each.



With the integrated analog value processing, it is easy to transmit analog signals. Up to 62 analog slaves with an A/B address (each with up to two channels) or up to 31 analog slaves with a standard address (each with up to four channels) are possible per CP.

The CP 343-2P is the further development of the CP 343-2 and contains its entire functionality. An existing STEP 7 user program for a CP 343-2 can thus be used without restrictions with a CP 343-2P. It is only in STEP 7 HW-Config that the two modules are configured differently, with the CP 343-2P offering additional options. This is why the CP 343-2P is recommended.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 6GK7343-2AH11-0XA0	▶	6GK7343-2AH11-0XA0		1	1 unit	42C
		<ul style="list-style-type: none"> • Device version with expanded configuration options for connection of SIMATIC S7-300 and ET 200M to AS-Interface • Configuration of the AS-i network using the SET key or STEP 7 (V5.2 and higher) • Without front plug • Corresponds to AS-Interface specification V3.0 • Dimensions (W x H x D/mm): 40 x 125 x 120 				
 6GK7343-2AH01-0XA0	▶	6GK7343-2AH01-0XA0		1	1 unit	42C
		<ul style="list-style-type: none"> • Basic version for connection of SIMATIC S7-300 and ET 200M to AS-Interface • Configuration of the AS-i network using the SET key • Without front plug • Corresponds to AS-Interface specification V3.0 • Dimensions (W x H x D/mm): 40 x 125 x 120 				

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Front plug, 20-pole						
• With screw terminals		1	6ES7392-1AJ00-0AA0	1	1 unit	230
• With spring-type terminals		1	6ES7392-1BJ00-0AA0	1	1 unit	230

More information

More information

Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/15754/man>

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see
<https://support.industry.siemens.com/cs/ww/en/view/61892138>

AS-i block library for SIMATIC PCS 7 for easy connection of AS-Interface to PCS 7, see from page 14/19 onwards

AS-Interface

Masters

Masters for SIMATIC ET 200

CM AS-i Master ST for SIMATIC ET 200SP

Overview



CM AS-i Master ST for SIMATIC ET 200SP

The CM AS-i Master ST communication module is designed for use in the SIMATIC ET 200SP distributed I/O system and has the following features:

- Connection of up to 62 AS-Interface slaves
- Supports all AS-Interface master functions according to the AS-Interface specification V3.0
- User-friendly configuration with graphic display of the AS-i line in TIA Portal V12 or higher, or via GSD in other systems
- Supply via AS-Interface cable
- Suitable for AS-i Power24V and for AS-Interface with 30 V voltage
- Integrated ground-fault monitoring for the AS-Interface cable
- Through connection to AS-Interface, the number of digital inputs and outputs available for the control system is greatly increased (max. 496 DI/496 DQ on the AS-Interface per CM AS-i Master ST).
- Integrated analog value processing

ET 200SP distributed I/O system

The SIMATIC ET 200SP is a scalable and highly flexible distributed I/O system for connecting the process signals to a central control system via PROFIBUS or PROFINET.

Up to eight CM AS-i Master STs can be plugged into a SIMATIC ET 200SP with the IM 155-6 PN standard interface module.

More information, [see the SIMATIC ET 200SP Manual Collection](#).

Design

The CM AS-i Master ST module has an ET 200SP module enclosure with a width of 20 mm. A C0 type BaseUnit (BU) is required for use in the ET 200SP.

The communication module has LED indicators for diagnostics, operation, AS-i voltage and AS-i slave status and offers informative front-side module inscription for

- Plain-text marking of the module type and function class
- 2D matrix code (Article No. and serial number)
- Circuit diagram
- Color coding of the CM module type: Light gray
- Hardware and firmware version
- Complete article number

Function

The CM AS-i Master ST communication module supports all specified functions of the AS-Interface specification V3.0.

The input/output values of the digital AS-i slaves can be activated via the cyclic process image. The values of the analog AS-i slaves are accessible via the cyclic process image (firmware V1.1 or higher) or via data record transfer.

If required, master calls can be performed with the command interface, e.g. read/write parameters, read/write configuration.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM AS-i Master ST in STEP 7.

Expansions as from firmware version V1.1

For the implementation of modular machine concepts, the AS-i Slaves can be activated or deactivated via the PLC program (option handling). The configuration of AS-i slaves can be modified while being executed, thus enabling variable machine setups and tool changing with integrated input/output modules during ongoing operation. AS-i input/output modules can be added to the system without deactivating the controller.

An existing AS-i installation can be read into the STEP 7 hardware configuration and adapted and documented in the project. Analog values are transmitted via the cyclic process image, the length of which is adjustable and extendable up to 288 bytes (depending on the interface module (IM) used).

Diagnostic information is accessed via automatic alarm indications, via the process image or data record reading in the user program or in the STEP 7 engineering system in a graphical overview matrix. The transmission quality of the AS-i network can also be read out. To avoid configuration errors, duplicate addresses can be detected on the AS-i network.

The new functions are available with TIA Portal STEP 7 V13 SP1 or with STEP 7 V5.5 with HSP 2092 V3.0¹⁾. Configuration is possible with SIMATIC CPUs S7-300 up to S7-1500 and with a SINUMERIK 840D sl or other controller.

In the network view, the AS-i slaves' online diagnostics status can be displayed directly on the slaves (for S7-1500 CPUs with firmware version V2.0 or higher, with TIA Portal STEP 7 V14 or higher).

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, [see www.siemens.com/industrialsecurity](#).

¹⁾ For HSP 2092, [see https://support.industry.siemens.com/cs/ww/en/view/23183356](#).

Configuration

The following software is required for configuration of the CM AS-i Master ST module:


- STEP 7 (TIA Portal) V12 or higher or V13 SP1 or higher (for firmware V1.1) or
- STEP 7 (classic) V5.5 SP3 HF4 or higher with HSP 2092 or HSP 2092 V3.0 (for firmware V1.1) or
- the GSD file of the ET 200SP with STEP 7 or another engineering tool

STEP 7 enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

Alternatively, you can also apply the AS-Interface ACTUAL configuration as the DESIRED configuration at the "touch of a button" via the control panel integrated in the TIA Portal or an optional expansion button. Configuration with the GSD file is possible only with the button.

The CM AS-i Master ST module occupies up to 288 input bytes and up to 288 output bytes in the I/O data of the ET 200SP station. The I/O assignment depends on the configuration in STEP 7.

Together with an ET 200SP CPU 1510SP/1512SP (firmware V1.8 or higher) or 1515SP PC, preprocessing of safe AS-i signals directly in the ET 200SP station and setting up of an independent AS-i Safety station without a higher-level CPU are possible (TIA Portal V13 SP1 Update 4 and higher).

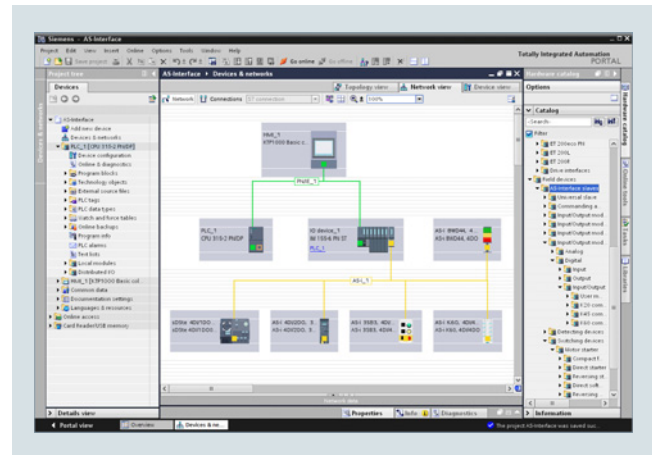

Configuration of an AS-Interface network with CM AS-i Master ST via the TIA Portal

Benefits

The CM AS-i Master ST for ET 200SP communication module enables modular, simple and high-performance expansion of AS-interface networks via engineering in the TIA Portal.

Up to eight CM AS-i Master ST units can be plugged into one ET 200SP station with IM 155-6 PN Standard. The maximum configuration depends on the interface module used.


Multiple masters as well as single masters can thus be implemented in the ET 200SP depending on the number of modules.

Together with the interface module, a scalable PROFINET/AS-i Link or PROFIBUS/AS-i Link can be assembled.

Using STEP 7, the AS-i network is consistently configured and programmed with only one configuration tool.

The PRONETA PC program (for ET 200SP with PROFINET interface module) is available for convenient input/output testing during the commissioning of an AS-i network without a CPU; see www.siemens.com/proneta.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>.

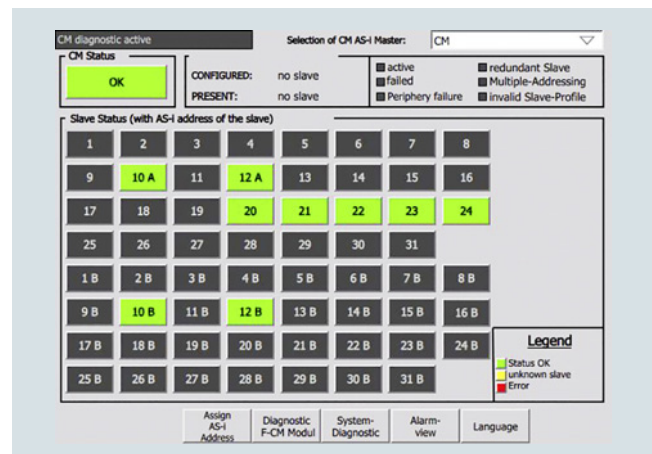

CM AS-i Master ST diagnostics block

AS-Interface


Masters

Masters for SIMATIC ET 200

CM AS-i Master ST for SIMATIC ET 200SP

Application

Configuration examples of AS-Interface networks with CM AS-i Master ST for SIMATIC ET 200SP

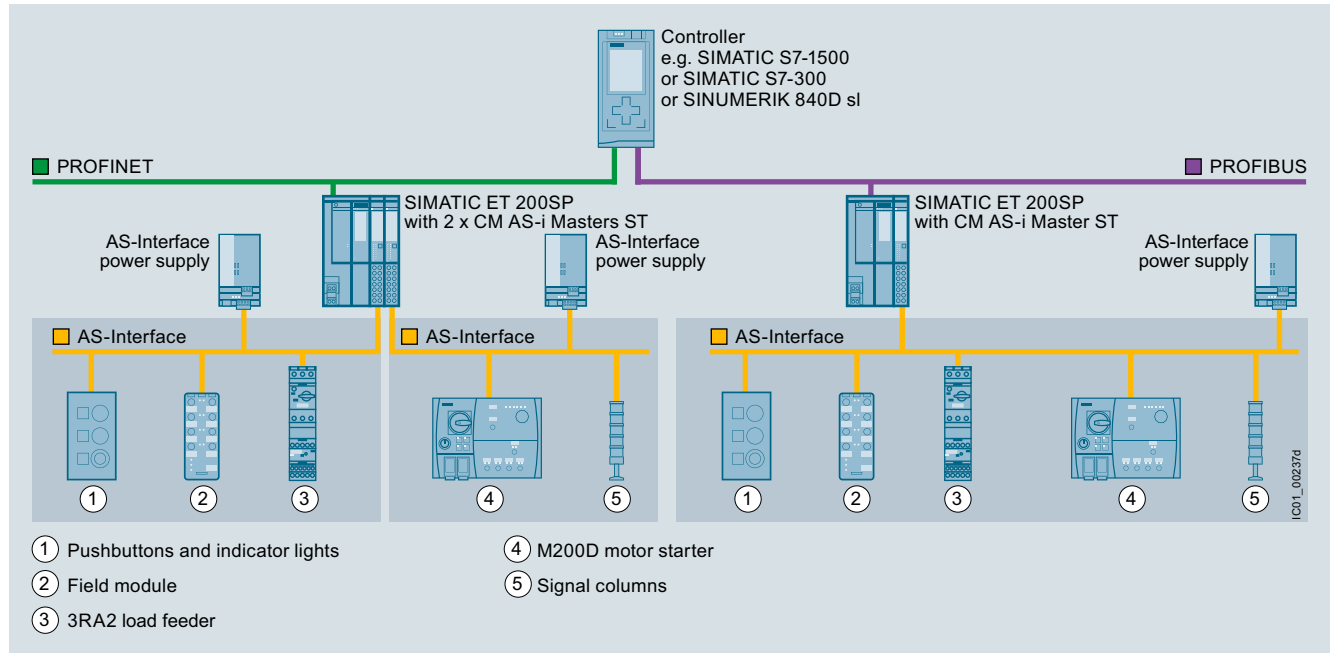

Configuration of AS-Interface networks under a SIMATIC ET 200SP

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
	2	3RK7137-6SA00-0BC1		1	1 unit	42C



3RK7137-6SA00-0BC1

CM AS-i Master ST communication module

- AS-Interface master for SIMATIC ET 200SP, can be plugged onto BaseUnit type C0
- Corresponds to AS-Interface specification V3.0
- Dimensions (W × H × D / mm): 20 × 73 × 58

Version	SD	Spring-type terminals	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		

6ES7193-6BP20-0DC0	1	1 unit	255
--------------------	---	--------	-----

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

6ES7155-6AR00-0AN0	1	1 unit	255
--------------------	---	--------	-----

6ES7155-6AA01-0BN0	1	1 unit	255
--------------------	---	--------	-----

6ES7155-6AU01-0BN0	1	1 unit	255
--------------------	---	--------	-----

6ES7155-6AU01-0CN0	1	1 unit	255
--------------------	---	--------	-----

6ES7155-6AU30-0CN0	1	1 unit	255
--------------------	---	--------	-----

6ES7155-6AU00-0DNO	1	1 unit	255
--------------------	---	--------	-----

6563155 6BA00 0GN0	1	1 unit	255
--------------------	---	--------	-----

Released combinations of the AS-i modules for ET 200SP, see <https://support.industry.siemens.com/cs/ww/en/view/103624653>

AS-Interface

Masters

Masters for SIMATIC ET 200

F-CM AS-i Safety ST for SIMATIC ET 200SP

Overview



F-CM AS-i Safety ST for SIMATIC ET 200SP

The F-CM AS-i Safety ST fail-safe communication module supplements an AS-Interface network without additional wiring to produce a safety-related AS-i network.

Important features:

- Fail-safe communication module for the ET 200SP
 - 31 fail-safe input channels in the process image
 - 16 fail-safe output channels in the process image
 - Certified up to SIL 3 (IEC 61508/EN 62061), PL e (EN ISO 13849-1)
 - Parameterization conforms with other fail-safe I/O modules of the ET 200SP
- The communication module supports PROFINET and PROFIBUS configurations. Can be used with fail-safe SIMATIC S7-300F / S7-400F CPUs and S7-1500F CPUs and also the fail-safe versions of the ET 200SP station with ET 200SP F-CPU 1510SP F/1512SP F (firmware V1.8 or higher) or 1515SP PC F.
- For reading up to 31 fail-safe AS-i input slaves
 - Two sensor inputs/signals for each fail-safe AS-i input slave
 - Adjustable evaluation of sensor signals: two-channel or 2 x single-channel
 - Integrated discrepancy evaluation in the case of two-channel signals
 - Integrated AND operation in the case of 2 x single-channel signals
 - Input delay can be parameterized
 - Startup test can be set
 - Sequence monitoring can be activated
- For control of up to 16 fail-safe AS-i output circuit groups
 - The output circuit groups are controlled independently of one another.
 - One output circuit group can act on one or more actuators (e.g. to switch drives simultaneously).
 - An actuator (e.g. a contactor) is interfaced via a fail-safe AS-i output module (e.g. safe SlimLine module S45F, Article No. 3RK1405-1SE15-0AA2, [see page 2/30](#)).
 - Simple fault acknowledgment via the process image
- Simple module replacement thanks to automatic importing of the safety parameters from the coding element
- Comprehensive diagnostic options
- Can be plugged onto type C1 or type C0 BaseUnits (BU)
- Informative automatic alarm indications (firmware V1.0.1 or higher)

- Supply via AS-Interface voltage
- Eight LED indicators for diagnostics, operating state, fault indication and supply voltage
- Informative front-side module inscription
 - Plain-text marking of the module type and function class
 - 2D matrix code (Article No. and serial number)
 - Circuit diagram
 - Color coding of the CM module type: Light gray
 - Hardware and firmware version
 - Complete article number
- Optional labeling accessories
 - Labeling strips
 - Reference identification label

Design

The fail-safe F-CM AS-i Safety ST module has an ET 200SP module enclosure with a width of 20 mm.

One AS-i master according to the AS-i specification V3.0 and safe AS-i input slaves and/or safe AS-i output modules are needed for operation. The CM AS-i Master ST communication module (Article No. 3RK7137-6SA00-0BC1) is recommended as the AS-i master for the ET 200SP, [see from page 2/36 onwards](#).

Simple combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules in one ET 200SP station results in a powerful, safety-oriented network transition between PROFINET (or PROFIBUS) and AS-Interface, which can be expanded further in a modular fashion.



Combination of an ET 200SP interface module, CM AS-i Master ST and F-CM AS-i Safety ST

With the digital and analog I/O modules of the ET 200SP, additional local inputs and outputs can be realized so as to ensure that the modular AS-i router complies precisely with customer requirements. Expansion variants for almost every application are possible thanks to the selection of standard and fail-safe I/O modules.

Besides the single AS-i master, double, triple or generally multiple masters can be realized with or without fail-safe functionality.

Supported BaseUnits

With the combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules, the CM module is plugged onto a light type C0 BaseUnit and, immediately to the right of it, the F-CM module is plugged onto a dark type C1 BaseUnit. The AS-i cable is connected only on the light BaseUnit of the CM module.

F-CM AS-i Safety ST for SIMATIC ET 200SP

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, see www.siemens.com/industrialsecurity.

Configuration

The following software is required for configuration of the F-CM AS-i Safety ST module:

- STEP 7 (TIA Portal) V13 and higher with HSP 0070¹⁾ and Safety Advanced V13.
STEP 7 V13 SP1 is required for connection to the S7-1500F. When configuring with STEP 7 V13 SP1, the latest version of HSP 0070 V2.0 (or higher) is an essential prerequisite. STEP 7 Safety V13 SP1 Update 4 and HSP 0070 V3.0 (or higher) are needed for configuration of the F-CM AS-i Safety ST module in an ET 200SP station with ET 200SP F-CPU 1510SP F / 1512SP F (firmware V1.8 or higher) or 1515SP PC F.

or

- STEP 7 (classic) V5.5 SP3 HF4 or higher with HSP 2093²⁾ and Distributed Safety V5.4 SP5 or F-Configuration Pack SP11 or SIMATIC S7 F/FH Systems

Configuration and programming are done entirely in the STEP 7 user interface. No additional configuration software is needed for commissioning.


Data management – together with all other configuration data of the SIMATIC – is realized completely in the S7 project.

The input and output channels are assigned to the process image automatically and manual linking via configuration blocks is not necessary.

If the F-CM AS-i Safety ST module is replaced, all necessary settings are automatically imported into the new module.

The F-CM AS-i Safety ST module occupies 16 input bytes and 8 output bytes in the I/O data of the ET 200SP station.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>.

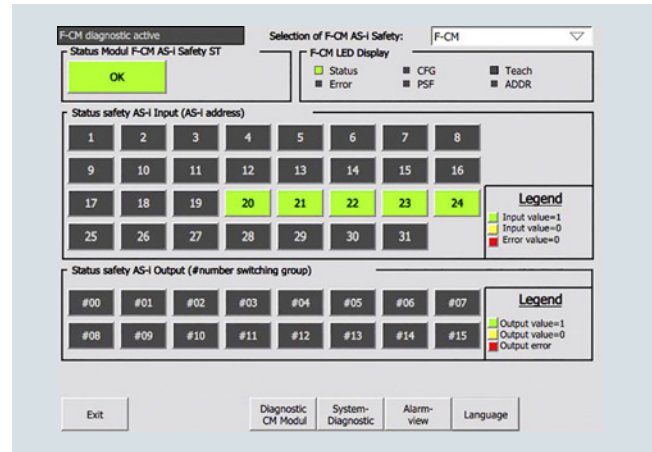

Diagnostics block for F-CM AS-i Safety ST

- ¹⁾ HSP 0070, see <https://support.industry.siemens.com/cs/ww/en/view/72341852>.
- ²⁾ HSP 2093, see <https://support.industry.siemens.com/cs/ww/en/view/23183356>.

Application

Thanks to use of the fail-safe module in the ET 200SP, it is possible to fulfill the safety-related application requirements in a manner that is integrated in the overall automation solution.

The safety functions required for fail-safe operation are integrated in the modules. Communication with the fail-safe SIMATIC S7 CPUs is realized via PROFIsafe.

The safety application is programmed in the SIMATIC S7 F-CPU with Distributed Safety/S7 F/FH Systems/Safety Advanced. The fail-safe input signals of the ASIsafe slave modules are read via the AS-i bus line and are combined with any chosen further signals in the fail-safe program.

The fail-safe output signals can be output via safe SIMATIC output modules or also directly via AS-i – with the help of safe AS-i output modules, e.g. safe SlimLine S45F modules, Article No. 3RK1405-1SE15-0AA2 (see page 2/30). No special functions are required for this in the program.

Operation with SINUMERIK 840D sl is possible with SINUMERIK software version V4.7 SP2 HF1 or higher.

Together with an ET 200SP station with ET 200SP F-CPU 1510SP F/1512SP F (firmware V1.8 and higher) or 1515SP PC F, pre-processing of safe AS-i signals directly in the ET 200SP station is possible, as well as the configuration of an autonomous AS-i Safety station without a higher-level CPU.


AS-Interface

Masters

Masters for SIMATIC ET 200


F-CM AS-i Safety ST for SIMATIC ET 200SP

Configuration examples of AS-Interface networks with CM AS-i Master ST and F-CM AS-i Safety ST for SIMATIC ET 200SP

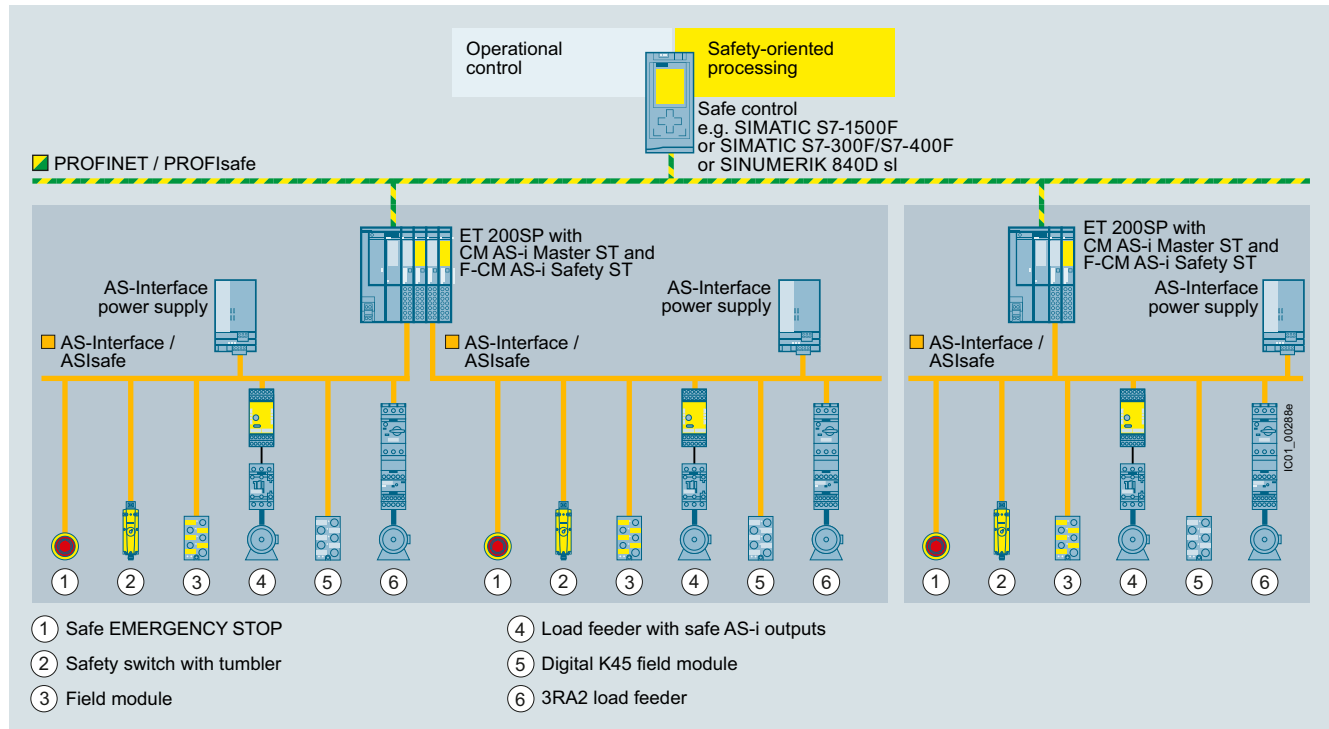


AS-Interface configuration comprising an ET 200SP station with CM AS-i Master ST and F-CM AS-i Safety ST modules

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RK7136-6SC00-0BC1	2	3RK7136-6SC00-0BC1		1	1 unit	42C
F-CM AS-i Safety ST communication module <ul style="list-style-type: none"> Fail-safe module for SIMATIC ET 200SP, can be plugged onto BaseUnit type C1 (alternatively type C0) Operation requires an AS-i master, e.g. CM AS-i Master ST (see page 2/38) Can be used up to SIL 3 (IEC 62061/IEC 61508), PL e (EN ISO 13849-1) Coding element type H (included in scope of supply) Dimensions (W x H x D/mm): 20 x 73 x 58 						

Accessories

Version	SD	Spring-type terminals	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		
 6ES7193-6BP20-0BC1	X	6ES7193-6BP20-0BC1		1	1 unit 255
BaseUnit BU20-P6+A2+4B <ul style="list-style-type: none"> BaseUnit (dark), BU type C1 Suitable for the F-CM AS-i Safety ST fail-safe communication module Continuation of an AS-i network, connection with the AS-i voltage of the left-hand module 					
	1	6ES7193-6EH00-1AA0		1	5 units 256
Coding element type H (spare part) <ul style="list-style-type: none"> For the ET 200SP modules F-CM AS-i Safety ST and CM 4xIO-Link Packing unit 5 items 					

More accessories, see page 2/39.

More information

More information	
SIMATIC ET 200SP Manual Collection, see https://support.industry.siemens.com/cs/ww/en/view/84133942 Diagnostics blocks with visualization, see https://support.industry.siemens.com/cs/ww/en/view/109479103	Released combinations of the AS-i modules for ET 200SP, see https://support.industry.siemens.com/cs/ww/en/view/103624653

AS-Interface Routers

DP/AS-i Link Advanced

Overview



DP/AS-i Link Advanced

PN	DP-M	DP-S	AS-i M		
		●	●		

The DP/AS-i Link Advanced is a compact router between PROFIBUS (DP slave) and AS-Interface, with the following features:

- Single and double AS-Interface master (according to AS-Interface specification V3.0) for connection of 62 AS-Interface slaves or 124 AS-Interface slaves (with a double master)
- Integrated analog value transmission
- Integrated ground-fault monitoring for the AS-Interface cable
- User-friendly local diagnostics and startup by means of a full graphic display and control keys or through a web interface with a standard browser on the PC screen
- Vertical integration (standard web interface) through Industrial Ethernet
- Supply voltage from the AS-Interface shaped cable or alternatively with 24 V DC (optional)
- Suitable for AS-i Power24V (from product version 4 / firmware version 2.2) and for AS-Interface with 30 V voltage
- Module exchange without entering the connection parameters (e.g. PROFIBUS address) using C-PLUG (optional)

Design

- Compact plastic enclosure in degree of protection IP20 for standard rail mounting
- COMBICON plug-in screw terminals
- Compact design:
 - Pixel graphics display in the front panel for detailed display of the operating state and readiness for operation of all connected AS-Interface slaves
 - 6 pushbuttons for starting up and testing the AS-Interface line directly on the DP/AS-i Link Advanced
 - LED indication of the operating state of PROFIBUS DP and AS-Interface
 - Integrated Ethernet port (RJ45 socket) for user-friendly start-up, diagnostics and testing of DP/AS-i Link Advanced through a web interface using a standard browser
- Small mounting depth thanks to recessed plug mounting
- Operation without fans and batteries

Functionality

Communications

The DP/AS-i Link Advanced enables a PROFIBUS DP master to cyclically access the I/O data of all the slaves of a lower-level AS-Interface segment.

The DP/AS-i Link Advanced occupies the following address space:

- As a single master: 32 bytes of input data and 32 bytes of output data in which the I/O data of the connected AS-Interface slaves (standard and A/B addressing) of an AS-i line is stored.
- As double master, double the number of bytes
- Optional additional I/O bytes for data from analog slaves

The size of the input/output image can be compressed so that only the actually required I/O address area is occupied in the system of the DP master. The integrated evaluation of analog signals is just as easy as access to digital values because the analog process data also lie directly in the I/O address area of the CPU.

PROFIBUS DP-V1 Masters also provide the option of triggering AS-Interface master calls over the acyclic PROFIBUS services (e.g. write parameters, amend addresses, read diagnostic values). Using an operating display in AS-i Link it is possible to fully commission the lower-level AS-Interface line even without a CPU.

DP/AS-i Link Advanced is equipped with an additional Ethernet port, which enables use of the integrated web server. The web server can be called up with any standard web browser (e.g. Internet Explorer) without additional software. It allows all diagnostics information, the set bus configuration and parameters and, if applicable, any adjustments to be displayed on the PC. Firmware updates are also possible using this port.

The optional C-PLUG supports module exchange without entering the connection parameters (PROFIBUS address etc.), keeping downtimes to a minimum in the event of a fault.

Diagnostics

The following diagnostics is possible using LEDs, the display and control keys, web interface or STEP 7:

- Operating state of the DP/AS-i Link Advanced
- Status of the link as a PROFIBUS DP slave
- Diagnostics of the AS-Interface network
- Message frame statistics
- Standard diagnostics pages in the web interface for fast diagnostics access through Ethernet using a standard browser
- For the use of the web interfaces no network settings are necessary on the PC (Zeroconf procedure)
- The reporting of diagnostic events is optionally possible via email or SNMP Trap. The integrated diagnostic buffer saves the events including time stamp

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, see www.siemens.com/industrialsecurity.

Configuration

The DP/AS-i Link Advanced can be configured as follows:

- With STEP 7 (TIA Portal) V12 or higher or STEP 7 (classic) V5.4 or higher: In the case of STEP 7 configuration, the AS-Interface configuration can be uploaded in STEP 7. Furthermore, AS-Interface slaves can also be conveniently configured in HW-Config (slave selection dialog)
- By adopting the ACTUAL configuration of the AS-Interface on the display
- Alternatively DP/AS-i Link Advanced can be integrated into the engineering tool using the PROFIBUS GSD file (e.g. STEP 7 versions earlier than V5.4 or engineering tools from third-party suppliers)

Benefits

- Short startup times through simple configuration at the press of a button and testing of the AS-Interface line using the display or web interface
- Reduction of standstill and servicing times in the event of a slave failure thanks to user-friendly diagnostics using the display or web interface and through simple module exchange with the help of the C-PLUG exchange medium
- Reduced amount of engineering work thanks to user-friendly configuration of Siemens slaves using the slave catalog in HW-Config (STEP 7)
- Costs saved by the double AS-Interface master when large volumes of project data are involved
- Simple operation with AS-Interface power supply unit (see [page 2/78](#)) possible without restrictions, no additional operating voltage is required.
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is supplied through an existing 24 V DC PELV power supply unit. An S22.5 AS-i data decoupling module (e.g. 3RK1901-1DE12-1AA0) is required for the decoupling, see [page 2/81](#).
- For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/61892138>.

AS-Interface Routers

DP/AS-i Link Advanced

Application

The DP/AS-i Link Advanced is a PROFIBUS DP-V1 slave (according to IEC 61158/IEC 61784) and an AS-Interface master (based on AS-Interface specification V3.0 according to IEC 62026-2). It enables transparent data access to AS-Interface from PROFIBUS DP.

Exchanging data with the PROFIBUS DP master


PROFIBUS DP masters (DP-V0) can exchange I/O data cyclically with the AS-Interface. DP masters with acyclic services (DP-V1) are additionally able to initiate AS-Interface master calls (e.g. reading/writing the AS-i configuration during normal operation). As such, the DP/AS-i Link Advanced is particularly well-suited for a distributed construction and for connection of a lower-level AS-Interface network.

Single master

For applications with typical volumes of project data, it is sufficient to use the DP/AS-i Link Advanced in its version as an AS-Interface single master. The single master can operate up to 248 DI / 248 DQ, using 62 A/B slaves with 4 DI / 4 DQ each.

Double master

The AS-Interface double master version of DP/AS-i Link Advanced is suitable for applications with large volumes of data. In this case, twice the volume of project data can be used on two AS-Interface lines running independently of each other. The double master can operate up to 496 DI / 496 DQ, using two AS-i networks each with 62 A/B slaves with 4 DI / 4 DQ each.

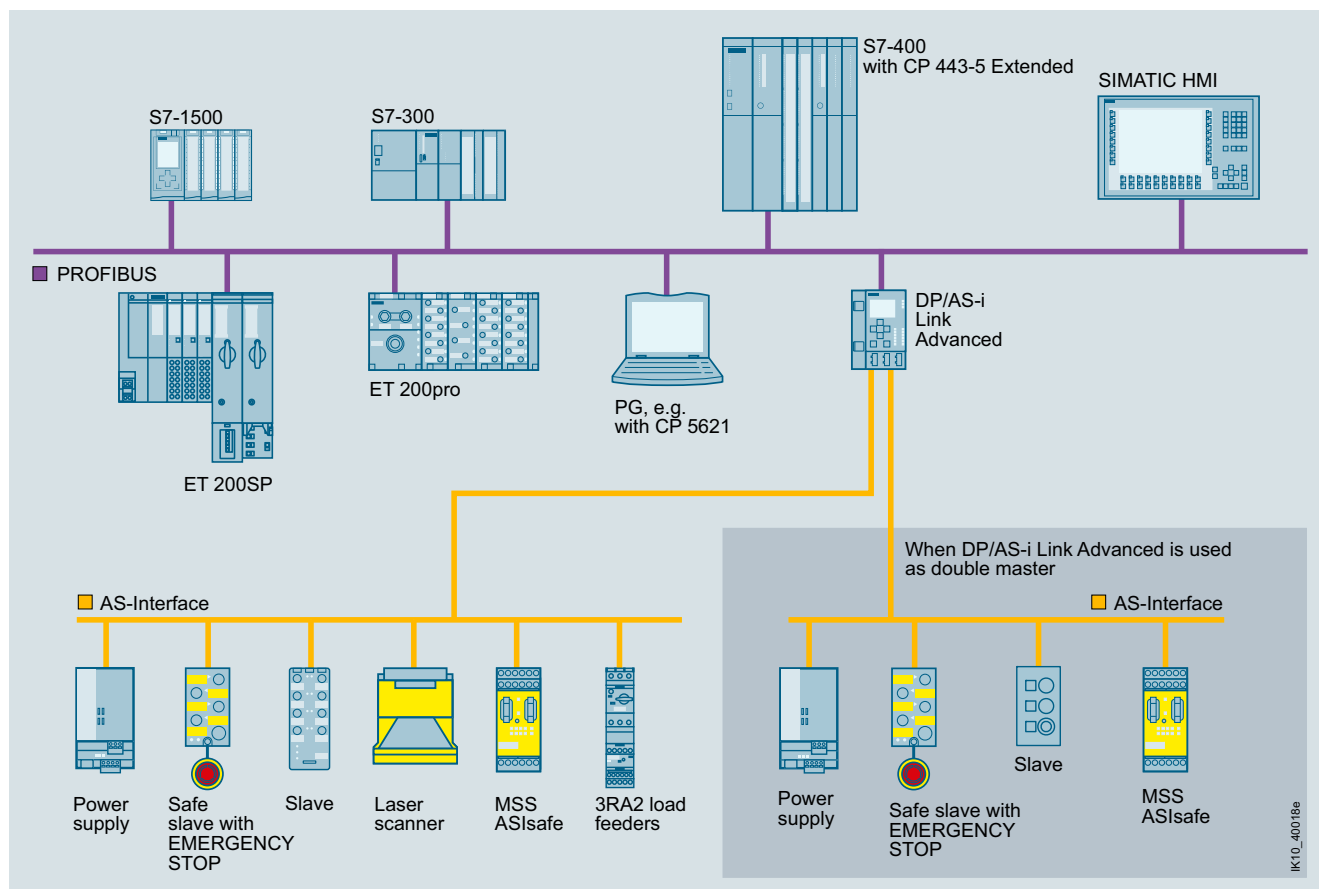

Integration of AS-Interface on PROFIBUS through DP/AS-i Link Advanced as single/double master

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

DP/AS-i Link Advanced



DP/AS-i Link Advanced

Router between PROFIBUS DP and AS-Interface; degree of protection IP20; including COMBICON plug-in screw terminals for connection of an AS-Interface cable (two AS-Interface cables for double masters) and the optional 24 V supply; corresponds to AS-Interface specification V3.0; dimensions (W x H x D/mm): 90 x 132 x 88.5

- Single master with display
- Double master with display

COMBICON connection



▶	6GK1415-2BA10	1	1 unit	42C
▶	6GK1415-2BA20	1	1 unit	42C

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

C-PLUG

Exchange medium for the simple exchange of devices in the event of a fault; for accommodating configuration and application data; can be used in SIMATIC NET products with a C-PLUG slot

PROFIBUS FastConnect standard cable GP

FastConnect standard type with special design for fast installation, 2-core, shielded

PROFIBUS FastConnect RS 485 bus plug with diagonal cable outlet (35°)

With insulation displacement connection, the max. transmission rate is 12 Mbps, activatable terminating resistor is integrated

- Without PG connection socket
- With PG connection socket

PROFIBUS FastConnect stripping tool

Preset stripping tool for speedy stripping of PROFIBUS FastConnect bus cables

IE FC RJ45 Plug 90

RJ45 plug-in connector for Industrial Ethernet, with robust metal enclosure and integrated insulation displacement contacts for connection of Industrial Ethernet FC installation cables; with 90° cable feeder

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

1	6GK1900-0AB00	1	1 unit	5N3
1	6XV1830-0EH10	1	1 M	5K1
1	6ES7972-0BA61-0XA0	1	1 unit	250
1	6ES7972-0BB61-0XA0	1	1 unit	250
1	6GK1905-6AA00	1	1 unit	5K2
1	6GK1901-1BB20-2AA0	1	1 unit	5K1
1	6GK1901-1BB20-2AB0	1	10 units	5K1
1	6GK1901-1BB20-2AE0	1	50 units	5K1

More information

More information

AS-i block library for SIMATIC PCS 7 for easy connection of AS-Interface to PCS 7, [see from page 14/19 onwards](#)

Manuals, [see https://support.industry.siemens.com/cs/ww/en/ps/24507/man](#)

AS-Interface Routers

DP/AS-Interface Link 20E

Overview



DP/AS-Interface Link 20E manual

PN	DP-M	DP-S	AS-i M		
		●	●		

DP/AS-Interface Link 20E connects PROFIBUS DP to AS-Interface and has the following features:

- PROFIBUS DP slave and AS-Interface master
- Up to 62 AS-Interface slaves, each with four digital inputs and four digital outputs as well as analog slaves can be connected
- Integrated analog value transmission
- Supports all AS-Interface master functions according to the AS-Interface specification V3.0
- Supply from AS-Interface cable; hence no additional power supply required
- Suitable for AS-i Power24V (from product version 2 / firmware version 3.1) and for AS-Interface with 30 V voltage
- Supports uploading of the AS-Interface configuration in STEP 7 V5.2 and higher

Design

- Compact plastic enclosure in degree of protection IP20 for standard rail mounting
- LEDs in the front panel for indicating the operating state and functional readiness of all connected slaves
- Setting of PROFIBUS DP address is possible by pressing a button
- LED indication of the PROFIBUS DP slave address, PROFIBUS DP bus faults and diagnostics
- Two pushbuttons for switching over the operating state and for adopting the existing ACTUAL configuration as the TARGET configuration

Functionality

Communications

The DP/AS-Interface Link 20E enables a DP master to access all the slaves of an AS-Interface network.

The DP/AS-Interface Link 20E occupies a standard 32 bytes of input data and 32 bytes of output data in which the digital I/O data of the connected AS-Interface slaves (standard and A/B addressing) of an AS-i line is stored.

The size of the input/output image can be compressed so that only the actually required I/O address area is occupied in the system of the PROFIBUS DP master.

The analog I/O data can be accessed with the S7 system functions for read/write data records.

Configuration

The DP/AS-Interface Link 20E is configured as follows:

- With STEP 7 (TIA Portal) from V12 or STEP 7 (classic) from V5.1 SP2:
In the case of STEP 7 configuration, the AS-Interface configuration can be uploaded from STEP 7 V5.2. Furthermore, AS-Interface slaves from Siemens can also be conveniently configured in HW Config (slave selection dialog).
- By adopting the ACTUAL configuration of the AS-Interface by using the SET pushbutton on the front panel.
- Alternatively, DP/AS-Interface Link 20E can be integrated by means of the PROFIBUS GSD file in the engineering tool (e.g. for STEP 7 V5.1 and lower or for non-Siemens engineering tools).

Benefits

- Reduction of installation costs because the power is supplied entirely via the AS-Interface cable, which means that no additional power supply is required
- Short startup times thanks to easy configuration at the touch of a button
- The LED indicators help reduce downtime and service times if a slave fails
- Quick and easy commissioning by reading the AS-Interface configuration
- For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, [see https://support.industry.siemens.com/cs/ww/en/view/61892138](https://support.industry.siemens.com/cs/ww/en/view/61892138).


Application

The DP/AS-Interface Link 20E is a PROFIBUS DP slave (according to IEC 61158/IEC 61784) and an AS-Interface master (according to IEC 62026-2). It enables the AS-Interface to be operated on PROFIBUS DP.

Up to 248 DI / 248 DQ can be operated via the DP/AS-Interface Link 20E using 62 A/B slaves with 4 DI / 4 DQ each.

PROFIBUS DP masters (DP-V0) can exchange digital I/O data cyclically with the AS-Interface.

PROFIBUS DP masters with acyclic services (DP-V1) are additionally able to exchange analog I/O data and initiate AS-Interface master calls (e.g. reading/writing the AS-i configuration during normal operation).

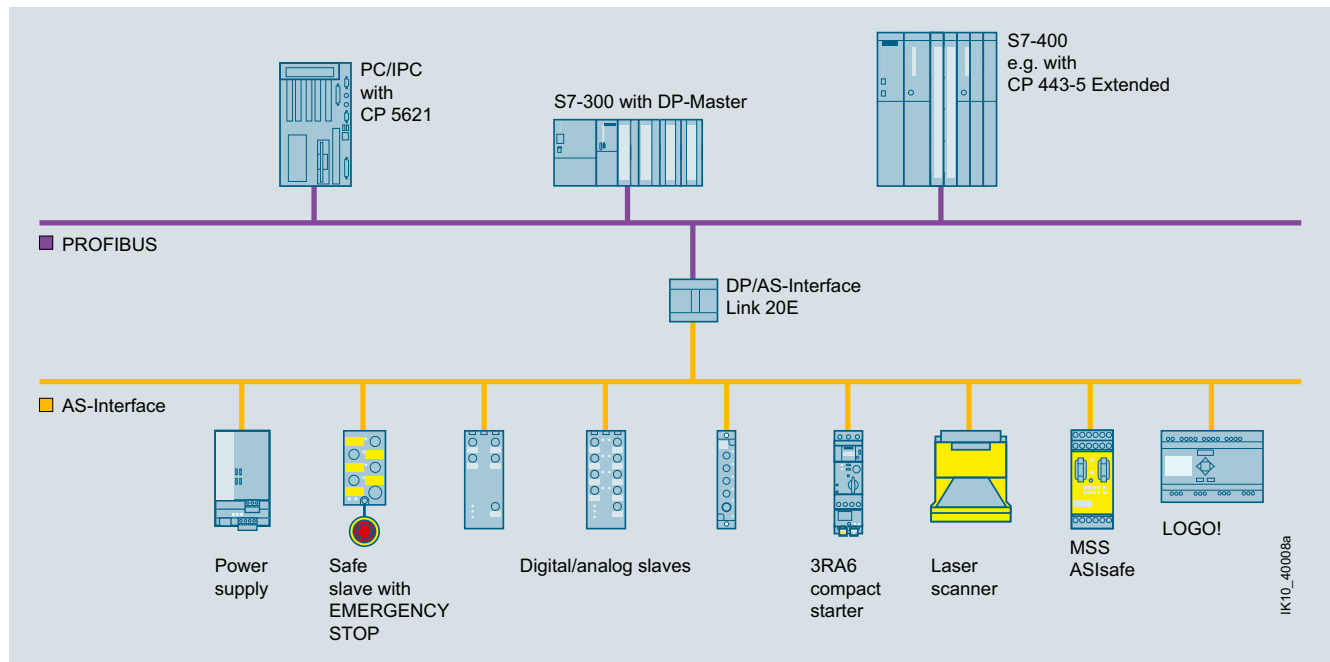

Transition from PROFIBUS DP to AS-Interface using DP/AS-Interface Link 20E

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

DP/AS-Interface Link 20E



6GK1415-2AA10

Router between PROFIBUS DP and AS-Interface in degree of protection IP20; including screw terminals for connection of the AS-Interface cable; corresponds to AS-Interface specification V3.0; dimensions (W x H x D/mm): 90 x 80 x 60 (dimensions without fixing lugs)

Screw terminals

▶ 6GK1415-2AA10	1	1 unit	42C
-----------------	---	--------	-----

AS-Interface Routers

DP/AS-Interface Link 20E

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
PROFIBUS FC Standard Cable GP FastConnect standard type with special design for fast installation, 2-core, shielded	1	6XV1830-0EH10		1	1 M	5K1
PROFIBUS FastConnect bus plugs With insulation displacement connection, max. transmission rate 12 Mbps, activatable terminating resistor integrated						
• RS 485 bus plug with 90° cable feeder						
- Without PG connection socket	1	6ES7972-0BA52-0XA0		1	1 unit	250
- With PG connection socket	1	6ES7972-0BB52-0XA0		1	1 unit	250
• RS 485 bus plug with diagonal cable outlet (35°)						
- Without PG connection socket	1	6ES7972-0BA61-0XA0		1	1 unit	250
- With PG connection socket	1	6ES7972-0BB61-0XA0		1	1 unit	250
PROFIBUS FastConnect stripping tool Preset stripping tool for speedy stripping of PROFIBUS FastConnect bus cables	1	6GK1905-6AA00		1	1 unit	5K2

More information

More information

Manual "DP/AS-Interface Link 20E", [see https://support.industry.siemens.com/cs/ww/en/view/5281638](https://support.industry.siemens.com/cs/ww/en/view/5281638)

Overview



IE/AS-i Link PN IO
Single master (picture on left) and double master (picture on right)

PN	DP-M	DP-S	AS-i M		
●			●		

The IE/AS-i Link PN IO is a compact router between PROFINET and AS-Interface, with the following features:

- Single and double AS-Interface master (according to AS-Interface specification V3.0) for connection of 62 or 124 AS-Interface slaves (with a double master)
- Integrated analog value transmission
- Integrated ground-fault monitoring for the AS-Interface cable
- User-friendly local diagnostics and startup by means of a full graphic display and control keys or through a web interface with a standard browser on the PC screen
- Vertical integration (standard web interface) through Industrial Ethernet
- Supply via AS-Interface cable or with 24 V DC
- Suitable for AS-i Power24V and for AS-Interface with 30 V voltage
- Module exchange without entering the PROFINET connection parameters when using the C-PLUG (optional)
- Costs saved by the double AS-Interface master when large volumes of project data are involved

Note:

As an alternative to the IE/AS-i Link PN IO, a high-performance router can be set up between PROFINET and AS-Interface by combining the CM AS-i Master ST and F-CM AS-i Safety ST modules in an ET 200SP station (for safety-related applications), see pages 2/38 and 2/43.

Design

- Compact plastic enclosure in degree of protection IP20 for standard rail mounting
- COMBICON plug-in screw terminals
- Compact design
- Pixel graphics display in the front panel for detailed display of the operating state and readiness for operation of all connected AS-Interface slaves
- Six pushbuttons for starting up and testing the AS-Interface line directly on the IE/AS-i Link PN IO
- LED display of the operating state of PROFINET IO and AS-Interface
- Integrated 2-port switch (RJ45 socket) for connection to Industrial Ethernet
- Small mounting depth thanks to recessed plug mounting
- Operation without fans and batteries

FunctionalityCommunications

The IE/AS-i Link PN IO enables a PROFINET IO controller to cyclically access the I/O data of all the slaves of a lower-level AS-Interface segment. Also supported are the expanded slave types with higher I/O data volume according to AS-i specification V3.0.

The IE/AS-i Link PN IO occupies the following address space:

- As a single master with full expansion: 62 bytes of input data and 62 bytes of output data in which the I/O data of the connected AS-Interface slaves (standard and A/B addressing) of an AS-i line is stored.
- As double master, double the number of bytes
- Optional additional I/O bytes for data from analog slaves

The size of the input/output image can be compressed so that only the actually required I/O address area is occupied in the system of the IO controller.

The integrated evaluation of analog signals is just as easy as access to digital values because the analog process data also lie directly in the I/O address area of the CPU.

PROFINET IO controllers are additionally able to initiate AS-Interface master calls (e.g. to write parameters, change addresses, read diagnostic values) through the acyclic PROFINET services.

Using an operating display in AS-Interface Link it is possible to fully commission the lower-level AS-i line.

The IE/AS-i Link PN IO is equipped with two Ethernet ports, which are connected by an internal switch. With the Ethernet it is possible in addition to use the integrated web server. The web server can be called up with any standard web browser (e.g. Internet Explorer) without additional software. It enables the PC to present all diagnostics information and to display the set bus configuration and parameters as well as their adaptation where applicable. Firmware updates are also possible using this port.

The optional C-PLUG supports module replacement without manually entering the connection parameters (PROFINET device name), keeping downtimes to a minimum in the event of a fault.

AS-Interface Routers

IE/AS-i Link PN IO

Diagnostics

The following diagnostics is possible using the display and control keys, web interface or STEP 7:

- Operating state of the IE/AS-i Link PN IO
- State of the link as a PROFINET IO device
- Diagnostics of the AS-Interface network
- Message frame statistics
- Standard diagnostics pages in the web interface for fast diagnostics access through Ethernet using a standard browser
- Reporting of diagnostic events is optionally possible via e-mail or SNMP trap. The integrated diagnostic buffer saves the events including time stamp

Note on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens products and solutions represent only one component of such a concept.

For more information about the subject of Industrial Security, see www.siemens.com/industrialsecurity.

Configuration

The IE/AS-i Link PN IO is configured as follows:

- With STEP 7 (TIA Portal) from V15 or STEP 7 (classic) from V5.4:
In the case of STEP 7 configuration, the AS-Interface configuration can be uploaded from STEP 7 V5.4 SP2. Furthermore, AS-Interface slaves from Siemens can also be conveniently configured in HW Config (slave selection dialog)
- Alternatively, IE/AS-i Link PN IO can be integrated by means of the PROFINET GSD file in the engineering tool (e.g. for TIA Portal versions earlier than V15 or for STEP 7 versions earlier than V5.4 SP2, or for non-Siemens engineering tools).

Benefits

- Short startup times through simple configuration at the press of a button and testing of the AS-Interface line using the display or web interface
- Reduction of standstill and servicing times in the event of a slave failure thanks to user-friendly diagnostics using the display or web interface
- Costs saved by the double AS-Interface master when large volumes of project data are involved
- Simple operation with AS-Interface power supply unit (see page 2/78) possible without restrictions, no additional operating voltage is required.
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is supplied through an existing 24 V DC PELV power supply unit. An S22.5 AS-i data decoupling module (e.g. 3RK1901-1DE12-1AA0) is required for the decoupling, see page 2/81.
- For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/61892138>.

Application

The IE/AS-i Link PN IO is a PROFINET IO device (according to IEC 61158/IEC 61784) and an AS-Interface master (based on AS-Interface specification V3.0 according to IEC 62026-2). It enables transparent data access to AS-Interface from PROFINET.

Exchanging data with PROFINET IO controllers


PROFINET IO controllers can exchange I/O data with AS-Interface in cyclic mode and can perform AS-i master calls in addition with acyclic services (e.g. reading/writing the AS-i configuration during normal operation). The IE/AS-i Link PN IO is therefore suitable for distributed configurations and for integrating a lower-level AS-Interface network.

Single master

The AS-i single master version of IE/AS-i Link PN IO is suitable for applications with typical volumes of data. The single master can operate up to 248 DI / 248 DQ, using 62 A/B slaves with 4 DI / 4 DQ each.

Double master

The AS-i double master version of IE/AS-i Link PN IO is suitable for applications with large volumes of data. In this case, twice the volume of project data can be used on two AS-i lines running independently of each other. The double master can operate up to 496 DI / 496 DQ, using two AS-i networks each with 62 A/B slaves with 4 DI / 4 DQ each.

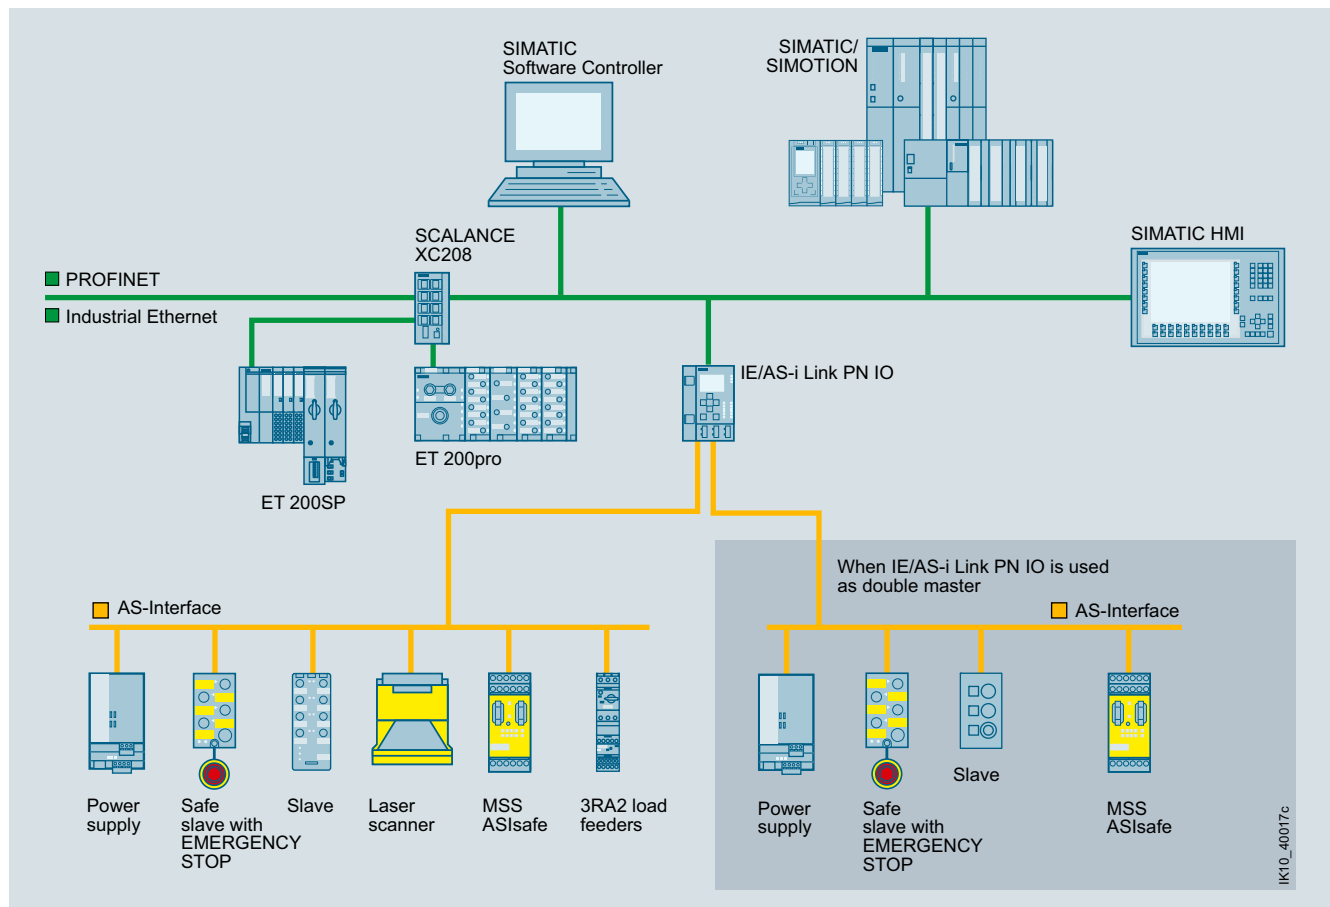

Integration of AS-Interface on PROFINET through IE/AS-i Link PN IO as single/double master


AS-Interface Routers

IE/AS-i Link PN IO

Wireless communication

Using an upstream IWLAN client module, e.g. SCALANCE W748-1 RJ45, an AS-Interface line can be integrated in the PROFINET world by wireless means.

Sample uses are applications which up to now have been performed with fault-prone tow chain or collector wire technology. Maintenance costs are thus reduced.

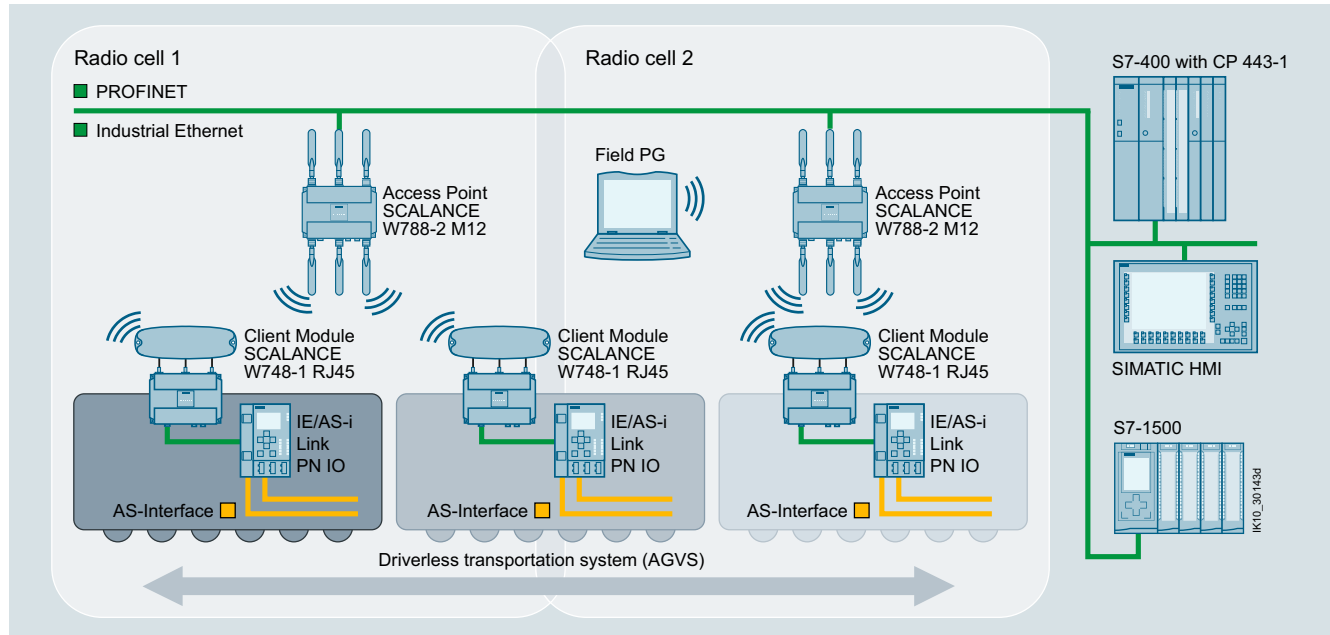

Wireless communication between Industrial Ethernet and AS-Interface components

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

IE/AS-i Link PN IO



IE/AS-i Link PN IO

Router between PROFINET and AS-Interface in degree of protection IP20; including COMBICON plug-in screw terminals for connecting an AS-Interface cable (two AS-Interface cables for a double master) and the optional 24 V supply; complies with AS-Interface specification V3.0; dimensions (W x H x D/mm): 90 x 132 x 88.5

- Single master with display
- Double master with display

COMBICON connection

▶ 6GK1411-2AB10	1	1 unit	42C
▶ 6GK1411-2AB20	1	1 unit	42C

Accessories


Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
C-PLUG	1	6GK1900-0AB00		1	1 unit	5N3
Exchange medium for simple exchange of devices in the event of a fault; for accommodating configuration and application data; can be used in SIMATIC NET products with a C-PLUG slot						
IE FC RJ45 Plug 90						
RJ45 plug-in connector for Industrial Ethernet, with robust metal enclosure and integrated insulation displacement contacts for connection of Industrial Ethernet FC installation cables; with 90° cable feeder						
• 1 pack = 1 unit	1	6GK1901-1BB20-2AA0		1	1 unit	5K1
• 1 pack = 10 units	1	6GK1901-1BB20-2AB0		1	10 units	5K1
• 1 pack = 50 units	1	6GK1901-1BB20-2AE0		1	50 units	5K1

More information

More information

Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/15762/man>

AS-i block library for SIMATIC PCS 7 for easy connection of AS-Interface to PCS 7, see from page 14/19 onwards

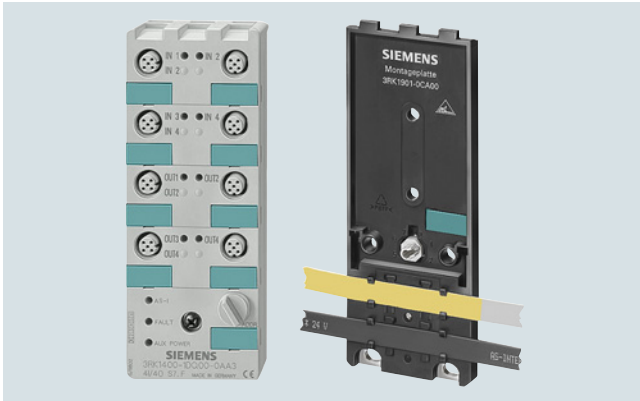Overview**K60****K45****K20**

Three coordinated series of AS-Interface compact modules with digital and analog compact modules and a high degree of protection are available for use in the field:

- Series K60 (digital and analog)
- Series K45 (digital)
- Series K20 (digital)

All compact modules are characterized by particularly simple handling. The K60 and K45 modules are mounted with a mounting plate. The mounting plate is used to mount the AS-Interface flat cables and enables mounting on a wall or standard mounting rail.

The particularly narrow K20 modules are directly mounted without a mounting plate and connected to the AS-Interface using a round cable.

Connection types

For flexible connection of different sensors and actuators, the following PIN assignments are available on the I/O modules with M12 sockets:

Standard assignment

With the standard assignment, one sensor/actuator is connected per M12 socket. In this case the signal for the outputs is acquired at PIN4 while the signal for the inputs is acquired at PIN4 and PIN2. As the result, sensors can be connected directly to PIN2 and PIN4.

Y-assignment

With the Y-assignment, two sensors or two actuators can be connected to one M12 socket. In this case, both PIN4 and PIN2 are provided for one sensor signal and one actuator signal on each M12 socket.

Y-II assignment

The Y-II assignment offers the following options:

- Individual connection of a sensor/actuator to one M12 socket
- Connection of two sensors/actuators to one M12 socket as follows:
 - The signal of the first sensor/actuator is connected to PIN4 of the first socket.
 - The signal of the second sensor/actuator is connected to PIN2 of the first socket and to PIN4 of the second socket. In this case, the second socket is not required and is closed with a sealing cap.

Overview of digital compact modules

The following table provides an overview of the important features of the digital compact modules.

Version	K60	K45	K20
8 inputs/2 outputs	✓	--	--
8 inputs	✓	✓	--
4 inputs/4 outputs	✓	✓	✓
4 inputs/3 outputs	✓	--	--
4 inputs/2 outputs	✓	--	--
4 inputs	✓	✓	✓
2 inputs/2 outputs	--	✓	✓
4 outputs	✓	✓	✓
3 outputs	--	✓	--
AS-Interface connection	Flat cable / round cable	Flat cable	Round cable
I/O connection method	M12	M12/M8	M12/M8
Pin assignment	Standard/Y-II/Y	Standard/Y	Standard/Y
Degree of protection	IP65/IP67/IP68/IP69K	IP65/IP67	IP65/IP67
Addressing type A/B address	✓	✓	✓

✓ Available

-- Not available

AS-Interface

Slaves

I/O Modules for Use in the Field, High Degree of Protection

Digital I/O modules, IP67 – K60

Overview



K60

The K60 digital AS-Interface compact modules are characterized by optimized handling characteristics and user-friendliness. They permit the mounting times and startup times of AS-Interface to be reduced by up to 40%.

Mounting and connection of the AS-Interface shaped cables

Assembly of the K60 modules is performed with a mounting plate which accommodates the AS-Interface shaped cables. Two different mounting plates are offered for

- Wall mounting
- Standard rail mounting

The mounting plate and the compact module are joined together by means of a screw, with simultaneous contacting of the AS-Interface cable by the service-proven insulation piercing method.

Addressing and connection of the sensors/actuators

Addressing of the K60 modules is performed using an addressing socket integrated in the compact module. The addresses can also be assigned after installation.

K60 modules with a maximum of four digital inputs and outputs

These compact modules contain the M12 standard connections for inputs and outputs. Using M12 standard plugs, a maximum of four sensors and four actuators can be connected to the compact module.

K60 compact modules with a maximum of eight digital inputs

These modules have eight digital inputs for connection through M12 plugs.


The module requires two AS-Interface addresses for processing all eight inputs. The addressing can thus be performed through a double addressing socket integrated in the module.

K60 data couplers

An AS-Interface data coupler has been added to the K60 compact module range. Integrated in this module are two AS-i slaves which are connected to two different AS-i networks. Each of the two integrated slaves has four virtual inputs and four virtual outputs. The bidirectional data transmission of four data bits between two AS-i networks is thus possible in a simple and cost-effective manner. The data coupler needs its own address in each AS-i network. The data coupler is supplied with power directly from the AS-i cable.




Each AS-i network works with a different cycle time depending on the number of stations. Hence two AS-i networks are not necessarily synchronous. For this reason, the AS-i data coupler can be used to transmit only standard data and no safety data.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Digital I/O modules, IP67 – K60 • PNP transistor • Width 60 mm • Connection method: M12 • Modules supplied without mounting plate						
 3RK1400-1DQ00-0AA3	Type	Current carrying capacity of outputs	Slave addressing type	Pin assignment	Sensor power supply via	
	8 inputs/2 outputs ¹⁾	2 A	A/B	Special	AS-i 2	3RK2400-1HQ00-0AA3
	8 inputs ¹⁾	--	Standard	Y-II	AS-i	3RK1200-0DQ00-0AA3
		--	A/B	Y-II	AS-i	3RK2200-0DQ00-0AA3
		--	A/B	Y-II	U _{aux} 5	3RK2200-1DQ00-1AA3
	4 inputs/4 outputs	2 A	Standard	Y-II	AS-i	3RK1400-1DQ00-0AA3
		2 A	Standard	Standard	AS-i	3RK1400-1CQ00-0AA3
		1 A	Standard	Y-II	AS-i	3RK1400-1DQ01-0AA3
		1 A	Standard	Standard	AS-i	3RK1400-1DQ03-0AA3
		2 A	A/B (Spec. V3.0)	Y-II	AS-i	3RK2400-1DQ00-0AA3
		2 A	A/B (Spec. V3.0)	Y-II	U _{aux} 2	3RK2400-1DQ00-1AA3
	4 inputs/3 outputs	2 A	A/B	Y-II	AS-i	3RK2400-1FQ03-0AA3
	4 inputs/2 outputs	2 A	Standard	Y-II	AS-i	3RK1400-1MQ00-0AA3
	4 inputs	--	Standard	Y-II	AS-i	3RK1200-0CQ00-0AA3
		--	A/B	Y-II	AS-i	3RK2200-0CQ00-0AA3
	2 x 2 inputs/2 x 2 outputs	1 A	Standard	Y	AS-i	3RK1400-1DQ02-0AA3
	4 outputs	2 A	Standard	Y-II	--	3RK1100-1CQ00-0AA3
		2 A	A/B (Spec. V3.0)	Y-II	--	3RK2100-1CQ00-0AA3
Digital I/O modules, IP67 – K60 data couplers Modules supplied without mounting plate						
Type	Current carrying capacity of outputs	Slave addressing type	Pin assignment	Sensor power supply via		
Data coupler 4 inputs/4 outputs (virtual)	--	Standard	--	--	10	3RK1408-8SQ00-0AA3

¹⁾ Module occupies two AS-Interface addresses

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
K60 mounting plates Suitable for all K60 compact modules • Wall mounting • Standard rail mounting						
 3RK1901-0CA00		3RK1901-0CA00		1	1 unit	42C
		3RK1901-0CB01		1	1 unit	42C
AS-Interface sealing caps M12 For free M12 sockets						
 3RK1901-1KA00		3RK1901-1KA00		100	10 units	42C
Sealing sets • For K60 mounting plate and standard distributor • Cannot be used for K45 mounting plate • One set contains one straight and one shaped seal						
 3RK1902-0AR00	2	3RK1902-0AR00		100	5 units	42D

AS-Interface


Slaves

I/O Modules for Use in the Field, High Degree of Protection

Digital I/O modules, IP68/IP69K – K60R

Overview

Operation in particularly harsh environments

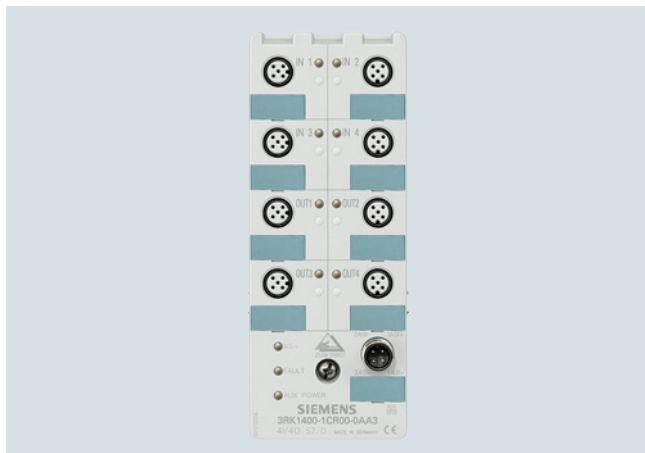

K60R module in degree of protection IP68/IP69K

Modules with degree of protection IP67 cannot be used in areas exposed to permanently high levels of humidity, in applications with drilling emulsions and cutting oils or when cleaning with high-pressure cleaners. The answer for these applications is provided by the expansion of the K60 compact modules with the K60R module with degree of protection IP68/IP69K.

The K60R modules are connected instead of the AS-Interface flat cable using a round cable with M12 cable box. The AS-Interface bus cable and the 24 V DC auxiliary power supply are routed in this case in a shared round cable.

Degree of protection IP68 permits many new applications that were impossible with the former field modules with degree of protection IP67. In applications such as filling plants or machine tools, the K60R with degree of protection IP68 enables the module to be used directly in zones exposed to permanent loading by humidity. It is thus possible to make even more rigorous savings in wiring with AS-Interface. For more information on IP68 test conditions, see "IP68/IP69K tests" on page 2/59.

Cleaning with high-pressure cleaners, such as is regularly performed in the food and drinks industry for instance, is possible without difficulty (IP69K).

In applications with tow chains, many users rely on placing the AS-Interface bus cable in a round cable. With the K60R module, a round cable connection is possible for direct connection to a round cable. No adapter is required.

Mounting


The same mounting plates are used as for the K60 modules. Instead of using flat cables, the K60R is connected using a 4-pole round cable with an M12 connection. With the K60R the mounting plate thus serves only as a fixture and ground terminal.

Addressing

Addressing is performed using the same socket as for the bus connection. Connecting the module to the addressing unit takes place over a 3-pole standard M12 cable.

When the mounting is finished, the module is connected with the addressing cable to the addressing unit and addressed. The addressing cable is then removed and the module connected to the bus cable.

Connection

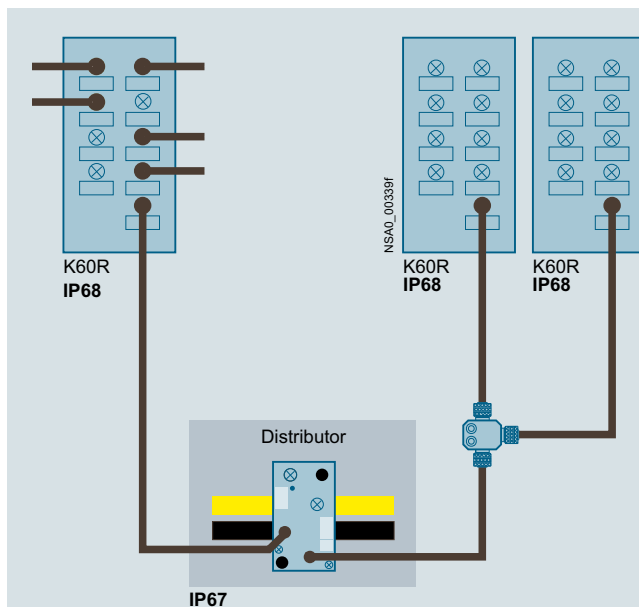

K60R connection options

In the IP67 environment, the service-proven standard components are connected using flat cables. Spur lines are laid into the IP68 environment by means of an AS-Interface M12 feeder (3RK1901-2NR..). The module is connected with a round cable to an M12 cable box. For this purpose, the module has an M12 bus connection instead of the former addressing socket. The AS-Interface bus cable and the 24 V DC auxiliary voltage are routed together in a 4-pole round cable. There must be no ground conductor in this round cable. Connection to ground is made through the mounting plate.

In the IP68 environment, only cables with extruded M12 plugs may be used.

Please note the following conditions:

- The configuration guidelines for AS-Interface apply. For all M12 connecting cables, the maximum permissible current is limited to 4 A. The cross-section of these cables is just 0.34 mm². For connection of the K60R modules, the aforementioned M12 connecting cables can be used for the spur lines. The voltage drop caused by the ohmic resistance (approx. 0.11 Ω/m) must be taken into account.
- For round cable connections with shared AS-i and U_{aux} in a single cable, the following maximum lengths apply:
 - Per spur line from feeder to module: max. 5 m
 - Total of all round cable segments in an AS-Interface network: max. 20 m

IP68/IP69K tests

K60R modules were tested with the following tests:


- Stricter test than IP67: 90 min at 1.8 m depth of water (IP67: 30 min at 1 m depth of water)
- Salt water test: Five months in salt water, 20 cm deep, at room temperature
- Test with particularly creepable oil: Five months completely under oil at room temperature
- Test with drilling emulsion: Five months at room temperature (components of the drilling emulsion: Anionic and non-ionic emulsifiers, paraffinic low-aromatic mineral oil, boric acid alkanolamines, corrosion inhibitors, oil content 40%)
- Test in oil bath (Excellence 416 oil) with alternating oil bath temperature: 130 cycles of 15 to 55 °C, two months
- Cleaning with a high-pressure cleaner according to IP69K: 80 to 100 bar, 10 to 15 cm distance, time per side > 30 s, water temperature 80 °C

To simulate requirements as realistically as possible, the modules were artificially aged prior to the tests by 15 temperature cycles of -25/+85 °C. During the test, the modules were connected to 3RX1 connecting cables. Unassigned connections were closed with 3RK1901-1KA00 sealing caps.

Note:

Sealing caps and M12 connections must be tightened with the correct torque.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
 Digital I/O modules, IP68/IP69K – K60R <ul style="list-style-type: none"> • 4 inputs/4 outputs • Width 60 mm • IP68/IP69K • Standard assignment • Current carrying capacity <ul style="list-style-type: none"> - 200 mA (inputs) - 2 A (outputs) • Slave addressing type: Standard address • Modules supplied without mounting plate 	2	3RK1400-1CR00-0AA3		1	1 unit	42C

3RK1400-1CR00-0AA3






AS-Interface

Slaves

I/O Modules for Use in the Field, High Degree of Protection

Digital I/O modules, IP68/IP69K – K60R

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG																				
 3RK1901-0CA00		K60 mounting plates Suitable for all K60 and K60R compact modules <ul style="list-style-type: none">• Wall mounting• Standard rail mounting	▶ ▶	3RK1901-0CA00 3RK1901-0CB01	1 1	1 unit 1 unit 42C 42C																				
 3RK1901-1KA00		AS-Interface sealing caps M12 For free M12 sockets	▶	3RK1901-1KA00	100	10 units 42C																				
 3RK1901-2NR21		AS-Interface M12 feeders, current carrying capacity up to 4 A NEW <table><tr><th>For flat cable</th><th>For</th><th>Cable length</th><th>Cable end in feeder</th><th></th></tr><tr><td>AS-i/U_{aux}</td><td>M12 socket</td><td>--</td><td>Not available</td><td>2</td></tr><tr><td>AS-i/U_{aux}</td><td>M12 cable box</td><td>1 m</td><td>Not available</td><td>2</td></tr><tr><td>AS-i/U_{aux}</td><td>M12 cable box</td><td>2 m</td><td>Not available</td><td>2</td></tr></table>	For flat cable	For	Cable length	Cable end in feeder		AS-i/U _{aux}	M12 socket	--	Not available	2	AS-i/U _{aux}	M12 cable box	1 m	Not available	2	AS-i/U _{aux}	M12 cable box	2 m	Not available	2		3RK1901-2NR20 3RK1901-2NR21 3RK1901-2NR22	1 1 1	1 unit 1 unit 1 unit 42C 42C 42C
For flat cable	For	Cable length	Cable end in feeder																							
AS-i/U _{aux}	M12 socket	--	Not available	2																						
AS-i/U _{aux}	M12 cable box	1 m	Not available	2																						
AS-i/U _{aux}	M12 cable box	2 m	Not available	2																						
 3RK1901-1NR04		AS-Interface M12 feeders, 4-fold, current carrying capacity up to 4 A <table><tr><th>For flat cable</th><th>For</th><th>Cable length</th><th>Cable end in feeder</th><th></th></tr><tr><td>AS-i/U_{aux}</td><td>4-fold M12 socket, delivery includes mounting plate (for wall and standard rail mounting)</td><td>--</td><td>Not available</td><td>2</td></tr></table>	For flat cable	For	Cable length	Cable end in feeder		AS-i/U _{aux}	4-fold M12 socket, delivery includes mounting plate (for wall and standard rail mounting)	--	Not available	2		3RK1901-1NR04	1	1 unit 42C										
For flat cable	For	Cable length	Cable end in feeder																							
AS-i/U _{aux}	4-fold M12 socket, delivery includes mounting plate (for wall and standard rail mounting)	--	Not available	2																						
 3RK1902-4PB15-3AA0	5	M12 connecting cables <ul style="list-style-type: none">• 3-pole• For addressing AS-i slaves with M12 bus connection• Cable length 1.5 m		3RK1902-4PB15-3AA0	1	1 unit 42D																				

Overview

Compact modules K45

The K45 series of compact modules supplements the large K60 compact modules which have a proven track record in industry. They are the logical consequence for rounding off the bottom end of the existing product range.

The acclaimed advantages of the existing K60 compact modules are fully emulated by the K45 modules. The K45 modules have a substantially smaller basic area and installation depth, however.

Yet in spite of these small dimensions all the modules have large labels and an integrated addressing socket.

Two mounting plates are offered for the K45 compact modules:

- Mounting plate for wall mounting
This has a hole pattern that is identical to that of the K60 compact modules. This means that K60 compact modules can be mounted together with K45 modules in an aligned arrangement. The shaped cables can be inserted in the recesses of the mounting plates where they cause no hindrance.
- Mounting plate for standard rail mounting

Connection of the AS-Interface shaped cables

The mounting plate and the compact module are joined together by means of a screw, with simultaneous contacting of the AS-Interface cable by the service-proven insulation piercing method.

Now, mounting the AS-Interface shaped cables is in fact easier than ever. The yellow and black AS-Interface shaped cable can be inserted into the mounting plates from the left or right regardless of the position of the coding lug. The correct polarity of the applied voltages is thus guaranteed.

Addressing and connection of the sensors/actuators

Addressing of the K45 compact modules is performed using an addressing socket integrated in the module. The addresses can be assigned even when mounted.

K45 modules with a maximum of four digital inputs and outputs

These compact modules contain up to four M12 standard connections or M8 standard connections for inputs and outputs. Using M12 or M8 standard plugs, a maximum of four sensors and four actuators can be connected to the compact module. Depending on the module, the sockets can be assigned in duplicate.

Pin assignment: Y – i.e. via a socket, two sensors or one sensor/one actuator are connected.

K45 modules with a maximum of eight digital inputs

These modules have eight digital inputs for connection through M12 plugs. The sockets have duplicate assignments. Pin assignment: Y – i.e. via a socket, two sensors or one sensor/one actuator are connected.

The module requires two AS-Interface addresses for processing all eight inputs. The addresses can be assigned through a double addressing socket integrated in the module.

AS-Interface**Slaves****I/O Modules for Use in the Field, High Degree of Protection****Digital I/O modules, IP67 – K45****Selection and ordering data**

3RK1400-0GQ20-0AA3

Version						SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
						d					
Digital I/O modules, IP67 – K45 <ul style="list-style-type: none">• PNP transistor• Width 45 mm• Current carrying capacity of the inputs: 200 mA• Modules supplied without mounting plate											
Type	Current carrying capacity of outputs	Slave addressing type	Pin assignment	U_{aux} 24 V	Connection methods						
8 inputs ¹⁾	--	A/B	Y	--	M12	2	3RK2200-0DQ20-0AA3	1	1 unit	42C	
4 inputs	--	Standard	Standard	--	M12	▶	3RK1200-0CQ20-0AA3	1	1 unit	42C	
		Standard	Standard	--	M8	2	3RK1200-0CT20-0AA3	1	1 unit	42C	
		A/B	Standard	--	M12	▶	3RK2200-0CQ20-0AA3	1	1 unit	42C	
		A/B	Standard	--	M8	5	3RK2200-0CT20-0AA3	1	1 unit	42C	
2 x 2 inputs	--	A/B	Y	--	M12	2	3RK2200-0CQ22-0AA3	1	1 unit	42C	
2 inputs/ 2 outputs	2 A ²⁾	Standard	Standard	✓	M12	▶	3RK1400-1BQ20-0AA3	1	1 unit	42C	
2 x (1 input/ 1 output)	0.2 A	Standard	Y	--	M12	2	3RK1400-0GQ20-0AA3	1	1 unit	42C	
4 x (1 input/ 1 output)	0.2 A	A/B (Spec. V3.0)	Y	--	M12	5	3RK2400-0GQ20-0AA3	1	1 unit	42C	
	0.5 A	A/B (Spec. V3.0)	Y	✓	M12	5	3RK2400-1GQ20-1AA3	1	1 unit	42C	
4 outputs	1 A	A/B (Spec. V3.0)	Standard	✓	M12	2	3RK2100-1CQ20-0AA3	1	1 unit	42C	
3 outputs	1 A	A/B	Standard	✓	M12	▶	3RK2100-1EQ20-0AA3	1	1 unit	42C	
4 outputs	1 A	Standard	Standard	✓	M12	▶	3RK1100-1CQ20-0AA3	1	1 unit	42C	
2 outputs/ 2 inputs	2 A	A/B	Standard	✓	M12	2	3RK2400-1BQ20-0AA3	1	1 unit	42C	

✓ Available

-- Not available

¹⁾ Module occupies two AS-Interface addresses²⁾ The typical current carrying capacity per output increases with version "E12" from 1.5 to 2 A (available since approx. 07/2003).**Accessories**

Version		SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		d					
K45 mounting plates							
<ul style="list-style-type: none"> • For wall mounting • For standard rail mounting 			▶	3RK1901-2EA00	1	1 unit	42C
			▶	3RK1901-2DA00	1	1 unit	42C
Cable termination pieces			▶	3RK1901-1MN00	1	10 units	42C
For sealing of open cable ends (shaped AS-Interface cable) in IP67							
AS-Interface sealing caps			▶	3RK1901-1KA00	100	10 units	42C
<ul style="list-style-type: none"> • For free M12 sockets • For free M8 sockets 			2	3RK1901-1PN00	100	10 units	42C



3RK1901-2EA00



3RK1901-1MN00



3RK1901-1KA00



3RK1901-1PN00

Overview

Digital I/O modules, IP67 – K20

The K20 compact module series rounds off the AS-Interface compact modules with a particularly slim design and only 20-mm width. Thanks to its extremely compact dimensions, these modules are particularly suited for handling machine applications in the field of production engineering where modules need to be arranged in the smallest of spaces.

Robotics is yet another application area. The K20 modules are connected to the AS-Interface with a round cable with M12 cable box instead of with the AS-Interface flat cable. The AS-Interface bus cable and the 24 V DC auxiliary energy are routed in this case in a shared round cable. This enables extremely compact installation.

The flexibility of the round cable means that it can also be used on moving machine parts without any problems. The K20 modules are also ideal for such applications as their non-encapsulated design makes them particularly light in weight.

In applications with tow chains, many users rely on placing the AS-Interface bus cable in a round cable. In this case, the K20 modules support direct connection to the round cable. No flat to round cable adapter is required.

The K20 compact module range includes standard AS-Interface modules, as well as an ASIsafe version for the connection of safety-related sensors, such as EMERGENCY STOP pushbuttons or protective door monitoring.

For particularly space-saving dimensions, the sensors and actuators are connected over M8 plug-in connectors. Alternatively, M12 connectors with Y-assignment can be used.

Selection and ordering data

Version					SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
					d					
Digital I/O modules, IP67 – K20										
Width 20 mm										
Type	Current carrying capacity of outputs	Slave addressing type	Pin assignment	Connection methods						
4 inputs	--	A/B	Standard	M8	2	3RK2200-OCT30-0AA3		1	1 unit	42C
	--	A/B	Y	M12	5	3RK2200-OCQ30-0AA3		1	1 unit	42C
2 inputs/ 2 outputs	1	A/B	Standard	M8	2	3RK2400-1BT30-0AA3		1	1 unit	42C
	1	A/B	Y	M12	2	3RK2400-1BQ30-0AA3		1	1 unit	42C
4 outputs	1	A/B (Spec. V3.0)	Standard	M8	2	3RK2100-1CT30-0AA3		1	1 unit	42C
4 inputs/ 4 outputs	1	Standard	Standard	M8	10	3RK1400-1CT30-0AA3		1	1 unit	42C
	1	A/B (Spec. V3.0)	Standard	M8	2	3RK2400-1CT30-0AA3		1	1 unit	42C
2 safe inputs	--	Standard	Y-II	M12	2	3RK1205-0BQ30-0AA3		1	1 unit	42C

3RK2200-
OCT30-0AA3


AS-Interface

Slaves

I/O Modules for Use in the Field, High Degree of Protection

Digital I/O modules, IP67 – K20

Accessories

	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		d					
 3RK1901-1KA00	AS-Interface sealing caps						
	<ul style="list-style-type: none"> For free M12 sockets For free M8 sockets 	▶ 2	3RK1901-1KA00 3RK1901-1PN00		100 100	10 units 10 units	42C 42C
 3RK1901-1PN00							
 3RK1901-2NN10	AS-Interface compact distributors, for AS-Interface flat cable <i>NEW</i>		2	3RK1901-2NN10	1	1 unit	42C
Current carrying capacity up to 8 A							
 3RX9801-0AA00	AS-Interface M12 feeders						
	<ul style="list-style-type: none"> Degree of protection IP67 Current carrying capacity up to 2 A 						
	For flat cable	For	Cable length	Cable end in feeder			
	AS-i	M12 socket	--	Available	▶	3RX9801-0AA00	1 1 unit 42C
 3RK1901-2NR10	AS-Interface M12 feeders <i>NEW</i>						
	<ul style="list-style-type: none"> Degree of protection IP67/IP68/IP69K Current carrying capacity up to 4 A 						
	For flat cable	For	Cable length	Cable end in feeder			
	AS-i	M12 socket	--	Not available	2	3RK1901-2NR10	1 1 unit 42C
	AS-i	M12 cable box	1 m	Not available	2	3RK1901-2NR11	1 1 unit 42C
	AS-i	M12 cable box	2 m	Not available	2	3RK1901-2NR12	1 1 unit 42C
	AS-i/U _{aux}	M12 socket	--	Not available	2	3RK1901-2NR20	1 1 unit 42C
	AS-i/U _{aux}	M12 cable box	1 m	Not available	2	3RK1901-2NR21	1 1 unit 42C
	AS-i/U _{aux}	M12 cable box	2 m	Not available	2	3RK1901-2NR22	1 1 unit 42C
 3RK1901-2NR21							
 3RK1901-2NR21	AS-Interface M12 feeders, 4-fold						
	Current carrying capacity up to 4 A						
	For flat cable	For	Cable length	Cable end in feeder			
	AS-i/U _{aux}	4-fold M12 socket, delivery includes mounting plate (for wall and standard rail mounting)	--	Not available	2	3RK1901-1NR04	1 1 unit 42C
 3RK1901-1NR04							
 6ES7194-1KA01-0XA0	M12 Y-shaped coupler plugs		1	6ES7194-1KA01-0XA0	1	1 unit	250
	For connection of two sensors to one M12 socket with Y-assignment						
 3RK1902-4PB15-3AA0	M12 connecting cables		5	3RK1902-4PB15-3AA0	1	1 unit	42D
	<ul style="list-style-type: none"> 3-pole For addressing AS-i slaves with M12 bus connection Cable length 1.5 m 						

Overview

K60 analog compact module

AS-Interface analog modules from the K60 compact series detect or issue analog signals locally. These modules are linked to the higher-level controller through an AS-Interface master according to specification V2.1 or specification V3.0.

The analog modules are divided into the following groups:

- Input modules for
 - Sensors with current sensor
 - Sensors with voltage signal
 - Sensors with thermal resistor
- Output modules for
 - Current actuators
 - Voltage actuators

The input modules according to profile 7.3/7.4 are available with two or four input channels. It is possible in addition to convert the two-channel module to using only one input channel, thus enabling very short times before the analog value is available. The conversion is effected by means of a jumper plug at socket 3. The transmission times achieved with analog modules according to Profile 7.A.9 are two times faster than those achieved with Profile 7.3/7.4. Operation is adjustable in this case, e.g. it is possible to choose with the ID1 code whether the module is operated with one or two channels.

The output modules are configured as two-channel modules as standard.

The input and output channels are electrically separated from the AS-Interface network. If sensors with a higher power requirement are to be connected, more power can be supplied through the auxiliary voltage as an alternative to the internal supply.

In the manual "AS-Interface Analog Modules Profile 7.3/Profile 7.A.9", the modules are presented in great detail along with their technical specifications and in-depth notes on operation. Sample function blocks round off the manual, [see "More information" on page 2/67](#).

Benefits

- Analog modules are just as easy to integrate in AS-Interface as digital modules
- Analog values can be easily detected and issued locally
- Preprocessing of the analog value transfer in the master enables rapid evaluation of the analog values
- Up to four values can be detected using one analog module
- Faster transmission and conversion of analog values thanks to the new option for switching to single-channel operation

In addition, specification V3.0 now also offers:

- A/B technology, now also with analog modules
- On average, double fast transmission times (only 3 or 4 cycles, depending on the resolution selected)
- Variable adjustable mode: 12-bit or 14-bit resolution, single-channel or two-channel, selectable via the ID1 code

AS-Interface**Slaves****I/O Modules for Use in the Field, High Degree of Protection****Analog I/O modules, IP67 – K60****Selection and ordering data**

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					



3RK1207-1BQ44-0AA3

Analog I/O modules, IP67 – K60, analog profile 7.3

- Slave addressing type: Standard address
- Width 60 mm
- Modules supplied without mounting plate

Inputs	Type	Measuring range					
1 or 2 inputs (selectable using jumper plug at socket 3)	Current	4 ... 20 mA or ± 20 mA (selectable) ¹⁾	2	3RK1207-1BQ40-0AA3	1	1 unit	42C
	Voltage	± 10 V or 1 ... 5 V (selectable)	2	3RK1207-2BQ40-0AA3	1	1 unit	42C
	Thermal resistance	Pt100 or Ni100 or 0 ... 600 Ω (selectable) ¹⁾	2	3RK1207-3BQ40-0AA3	1	1 unit	42C
4 inputs	Current	4 ... 20 mA or ± 20 mA (selectable)	2	3RK1207-1BQ44-0AA3	1	1 unit	42C
	Voltage	± 10 V or 1 ... 5 V (selectable)	10	3RK1207-2BQ44-0AA3	1	1 unit	42C
	Thermal resistance	Pt100 or Ni100 or 0 ... 600 Ω (selectable)	2	3RK1207-3BQ44-0AA3	1	1 unit	42C
Outputs	Type	Output range					
2 outputs	Current for 2-wire actuators	4 ... 20 mA or ± 20 mA or 0 ... 20 mA (selectable) ¹⁾	2	3RK1107-1BQ40-0AA3	1	1 unit	42C
	Voltage for 2-wire actuators	± 10 V or 0 ... 10 V or 1 ... 5 V (selectable)	2	3RK1107-2BQ40-0AA3	1	1 unit	42C



3RK2207-2BQ50-0AA3

Analog I/O modules, IP67 – K60, analog profile 7.A.9

- Slave addressing type: A/B (Spec. V3.0)
- Width 60 mm
- Modules supplied without mounting plate





Inputs	Type	Measuring range					
1 or 2 inputs (variably adjustable)	Current	4 ... 20 mA or ± 20 mA (selectable)	2	3RK2207-1BQ50-0AA3	1	1 unit	42C
	Voltage	± 10 V or 1 ... 5 V (selectable)	2	3RK2207-2BQ50-0AA3	1	1 unit	42C

¹⁾ Some modules are available in the extended temperature range (from -25 to 70 °C) and for use in difficult environmental conditions (coated according to environment standard IEC 60721).

Description	SIPLUS article number	Corresponds to module
SIPLUS AS-Interface 2AA, IP67	6AG1107-1BQ40-7AA3	3RK1107-1BQ40-0AA3
SIPLUS AS-Interface 2AI, IP67	6AG1207-1BQ40-7AA3	3RK1207-1BQ40-0AA3
SIPLUS AS-Interface 2AI, IP67	6AG1207-3BQ40-7AA3	3RK1207-3BQ40-0AA3

For more information, see www.siemens.com/siplus-extreme.

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RK1901-0CA00		K60 mounting plates				
	▶	• Wall mounting ▶ 3RK1901-0CA00		1	1 unit	42C
	▶	• Standard rail mounting ▶ 3RK1901-0CB01		1	1 unit	42C
 3RK1901-1KA00	▶	M12 sealing caps 3RK1901-1KA00		100	10 units	42C
 3RK1902-0AR00	2	Sealing sets • For K60 mounting plate and distributor • Cannot be used for K45 mounting plate • One set contains one straight and one shaped seal 3RK1902-0AR00		100	5 units	42D
 3RK1901-1AA00	2	Jumper plugs For changing over the two channel input modules 3RK1901-1AA00		1	1 unit	42C

More information**More information**

For the Manual "AS-Interface Analog Modules Profile 7.3, Profile 7.A.9", see <https://support.industry.siemens.com/cs/ww/en/view/7643815>

AS-Interface

Slaves


I/O Modules for Use in the Control Cabinet

Introduction

Overview



SC17.5F, SC17.5 and SC22.5 SlimLine Compact modules

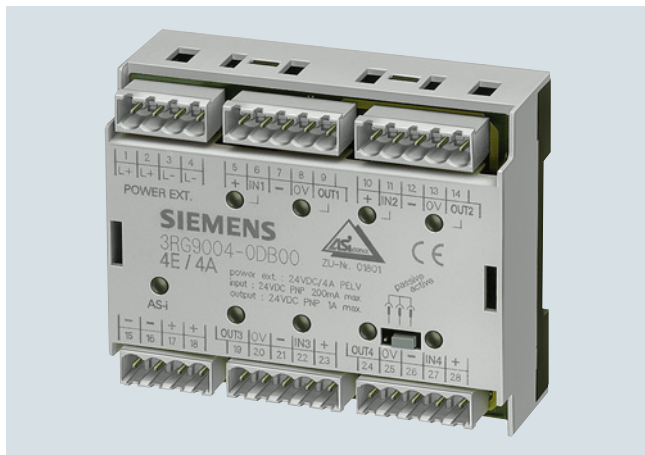

F90 module



Flat module

For AS-Interface applications inside control cabinets, there are various module series for the most diverse requirements:

- SlimLine Compact – particularly slim design ideal for space-saving use in the control cabinet
- F90 module – particularly flat design for flat control boxes
- Flat module – special design for integration into customer-specific solutions

The existing SlimLine series of modules S22.5 and S45 are being replaced by the innovative new devices in the SlimLine Compact SC17.5, SC17.5F and SC22.5 series. The previous SlimLine modules are still available as replacements for existing systems.

Available versions

The following table provides an overview of the key features of the different series of control cabinet modules.

Feature	SlimLine Compact	F90 module	Flat module
Digital I/O	✓	✓	✓
Analog I/O	✓	--	--
Safe inputs	✓	--	--
Relay outputs	✓	--	--
Addressing method A/B address	✓	--	--
Mounting onto TH 35 standard mounting rail according to IEC 60715	✓	✓	--
Wall mounting using push-in lugs	✓	--	--
Integrated lugs for screw fixing	--	--	✓
Width in mm	17.5 or 22.5	90	80

✓ Available

-- Not available

Overview

SlimLine Compact modules



SC17.5 and SC22.5 SlimLine Compact modules with screw terminals

The AS-Interface module series for the control cabinet SlimLine Compact with degree of protection IP20 creates space in the cabinet and in distributed local control boxes. A width of just 17.5 mm or 22.5 mm ensures considerable space savings in the control cabinet.

The SlimLine Compact module series comprises not only digital and analog I/O modules but also ASIsafe modules with safe inputs. Digital outputs are available as electronic and relay outputs.

Sensors and actuators, as well as the AS-Interface bus cable, are connected by means of removable screw or push-in spring-type terminals. Device connectors available as accessories offer the possibility of looping through the AS-Interface bus cable and the 24 V DC power supply U_{aux} from one module to additional modules. This significantly simplifies the wiring, as the AS-Interface bus cable and U_{aux} only have to be connected to one device.



SlimLine Compact module SC22.5 with connector with screw terminals

All devices for the connection of 3-wire sensors offer the option of supplying the sensors either from the AS-Interface bus cable or alternatively from the 24 V DC voltage supply U_{aux} depending on the requirements of the particular application. A slide switch is used to make the selection. If supply via U_{aux} is selected, the wiring of the sensor terminals remains unchanged. This means that no external supply is required for the sensors.

All modules have LEDs on the front that provide diagnostic information and indicate the status of the module inputs and outputs. Devices with semiconductor outputs indicate the status of each output by means of a dual LED. Thus the status (on/off/overload) is displayed for each output. An addressing socket integrated at the front enables the module to be addressed also when it is installed. Integrated adapters permit mounting onto a standard mounting rail – either directly for the module or for the device connector. Alternatively, the modules can also be screw-mounted using push-in lugs (accessories). These lugs for screw fastening must be ordered separately.

AS-Interface**Slaves****I/O Modules for Use in the Control Cabinet****SlimLine Compact****Selection and ordering data**

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 42C

More information

For the "SlimLine Compact Modules" Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/109481489>

Version				SD	Screw terminals		SD	Spring-type terminals (push-in)	
I/O type	Width	Inputs	Outputs		Article No.	Price per PU		Article No.	Price per PU
	mm			d					

SC17.5 and SC22.5 digital SlimLine Compact modules**Slave addressing type: A/B address**

3RK2200-0CG00-2AA2



3RK2400-2CG00-2AA2

4 inputs	17.5	2-wire	--	2	3RK2200-0CE00-2AA2	2	3RK2200-0CG00-2AA2
	22.5	3-wire	--	2	3RK2200-2CE00-2AA2	2	3RK2200-2CG00-2AA2
4 outputs	22.5	--	2A electronic	2	3RK2100-1CE00-2AA2	2	3RK2100-1CG00-2AA2
4 inputs/ 2 outputs, relays	22.5	3-wire	Relay (change-over contact)	2	3RK2402-2ME00-2AA2	2	3RK2402-2MG00-2AA2
4 inputs/ 4 outputs, relays	22.5	3-wire	Relay (NO contacts)	2	3RK2402-2CE00-2AA2	2	3RK2402-2CG00-2AA2
4 inputs/ 4 outputs	22.5	3-wire	2A electronic	2	3RK2400-2CE00-2AA2	2	3RK2400-2CG00-2AA2

Slave addressing type: Standard address

4 inputs/ 4 outputs	22.5	3-wire	2A electronic	2	3RK1400-2CE00-2AA2	2	3RK1400-2CG00-2AA2
------------------------	------	--------	---------------	---	---------------------------	---	---------------------------

SC22.5 analog SlimLine Compact modules**Slave addressing type: Standard address**

3RK1207-0CG00-2AA2

4 inputs	22.5	Voltage/ current selectable	--	2	3RK1207-0CE00-2AA2	2	3RK1207-0CG00-2AA2
		Thermal resistance	--	2	3RK1207-3CE00-2AA2	2	3RK1207-3CG00-2AA2
2 outputs	22.5	--	Voltage/ current selectable	2	3RK1107-0BE00-2AA2	2	3RK1107-0BG00-2AA2

SC17.5F ASIsafe SlimLine Compact modules**Slave addressing type: Standard address**

3RK1405-0BG00-2AA2

2 safe inputs	17.5	For mechanical contacts	--	2	3RK1205-0BE00-2AA2	2	3RK1205-0BG00-2AA2
2 safe inputs/ 2 standard outputs	17.5	For mechanical contacts	Electronic, U_{AS}/U_{aux} supply selectable	2	3RK1405-2BE00-2AA2	2	3RK1405-2BG00-2AA2

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Device connectors For electrical connection of SlimLine Compact modules (connects AS-i bus cable and 24 V DC auxiliary power supply U_{aux} when using several SlimLine Compact modules)						
						
3RK1901-1YA00						
						
3RK1901-1YA10						
	2	3RK1901-1YA00		1	1 unit	42C
	2	3RK1901-1YA10		1	1 unit	42C
Device termination connectors Required for the last module in the network						
						
3RK1901-1YA01						
						
3RK1901-1YA11						
	2	3RK1901-1YA01		1	1 unit	42C
	2	3RK1901-1YA11		1	1 unit	42C
Removable terminals						
						
3ZY1121-2BA00						
	2	Screw terminals				
	2	3ZY1121-1BA00		1	6 units	41L
	2	3ZY1141-1BA00		1	6 units	41L
	2	Spring-type terminals (push-in)				
	2	3ZY1121-2BA00		1	6 units	41L
	2	3ZY1141-2BA00		1	6 units	41L
Hinged cover <i>NEW</i> Replacement for SlimLine Compact module, without terminal labeling						
						
3ZY1450-1BA00						
						
3ZY1450-1AB00						
	2	3ZY1450-1AA00		1	5 units	41H
	2	3ZY1450-1BA00		1	5 units	41H
	2	3ZY1450-1AB00		1	5 units	41H
Push-in lugs for wall mounting Two lugs are required per device						
						
3ZY1311-0AA00						
	2	3ZY1311-0AA00		1	10 units	41L
Coding pins for removable terminals For mechanical coding of the terminals						
						
3ZY1440-1AA00						
	2	3ZY1440-1AA00		1	12 units	41L
Blank labels Unit labeling plates ¹⁾						
						
3RT2900-1SB20						
	20	3RT2900-1SB10		100	816 units	41B
	20	3RT2900-1SB20		100	340 units	41B
Tools for opening spring-type terminals						
						
3RA2908-1A						
	2	3RA2908-1A		1	1 unit	41B

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/16).


AS-Interface

Slaves

I/O Modules for Use in the Control Cabinet

SlimLine Compact

More information

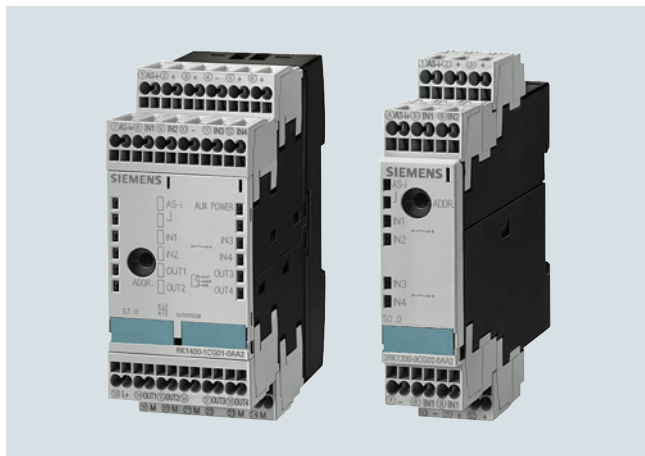

SlimLine modules S45 (picture on left) and S22.5 module (picture on right) with spring-type terminals

The existing SlimLine series of I/O modules for use in the control cabinet is being replaced by the new, innovative SlimLine Compact series. We recommend that these new devices are used in future.

The code conversion table indicates the best options for replacing the existing SlimLine devices with SlimLine Compact devices.

Note:




The previous SlimLine devices are still available for use as replacements in existing systems. As a result of the innovation, the new SlimLine Compact devices are not fully compatible in terms of either mechanical dimensions or electrical properties.

The code conversion table below links the existing SlimLine S22.5, S22.5F and S45 modules with the new SlimLine Compact SC17.5, SC17.5F and SC22.5 devices.

Code conversion table

S22.5, S22.5F and S45 SlimLine			Comparison type: SC17.5, SC17.5F and SC22.5 SlimLine Compact		
Screw terminals	Spring-type terminals	Version	Screw terminals	Spring-type terminals	Version
3RK1200-0CE00-0AA2	3RK1200-0CG00-0AA2	4 DI, 2-wire, standard address	3RK2200-0CE00-2AA2	3RK2200-0CG00-2AA2	4 DI, 2-wire, A/B address
3RK2200-0CE02-0AA2	3RK2200-0CG02-0AA2	4 DI, A/B address	3RK2200-2CE00-2AA2	3RK2200-2CG00-2AA2	4 DI, A/B address
3RK1200-0CE02-0AA2	3RK1200-0CG02-0AA2	4 DI, standard address			
3RK1400-0BE00-0AA2	3RK1400-0BG00-0AA2	2 DI / 2 DQ, standard address	3RK1400-2CE00-2AA2	3RK1400-2CG00-2AA2	4 DI / 4 DQ, standard address
3RK1402-0BE00-0AA2	3RK1402-0BG00-0AA2	2 DI / 2 DQ relay, standard address	3RK2402-2ME00-2AA2	3RK2402-2MG00-2AA2	4 DI / 2 DQ relay, A/B address
3RK1100-1CE00-0AA2	3RK1100-1CG00-0AA2	4 DQ, standard address	3RK2100-1CE00-2AA2	3RK2100-1CG00-2AA2	4 DQ, A/B address
3RK2400-1CE01-0AA2	3RK2400-1CG01-0AA2	4 DI / 4 DQ, A/B address	3RK2400-2CE00-2AA2	3RK2400-2CG00-2AA2	4 DI / 4 DQ, A/B address
3RK2400-1FE00-0AA2	3RK2400-1FG00-0AA2	4 DI / 3 DQ, A/B address			
3RK1400-1CE00-0AA2	3RK1400-1CG00-0AA2	4 DI / 4 DQ, 1A electronic, standard address	3RK1400-2CE00-2AA2	3RK1400-2CG00-2AA2	4 DI / 4 DQ, 2A electronic, standard address
3RK1400-1CE01-0AA2	3RK1400-1CG01-0AA2	4 DI / 4 DQ, 2A electronic, standard address			
3RK1402-3CE01-0AA2	3RK1402-3CG01-0AA2	4 DI / 4 DQ (sensor supply from U_{aux}), standard address	3RK2402-2CE00-2AA2	3RK2402-2CG00-2AA2	4 DI / 4 DQ relay, A/B address
3RK1402-3CE00-0AA2	3RK1402-3CG00-0AA2	4 DI / 4 DQ relay, standard address			
3RK1205-0BE00-0AA2	3RK1205-0BG00-0AA2	2 F-DI, standard address	3RK1205-0BE00-2AA2	3RK1205-0BG00-2AA2	2 F-DI, standard address
3RK1405-0BE00-0AA2	3RK1405-0BG00-0AA2	2 F-DI / 2 DQ, standard address (outputs supplied from U_{ASI})	3RK1405-2BE00-2AA2	3RK1405-2BG00-2AA2	2 F-DI / 2 DQ, standard address (supply U_{ASI}/U_{aux} selectable)
3RK1405-1BE00-0AA2	3RK1405-1BG00-0AA2	2 F-DI / 2 DQ, standard address (outputs supplied from U_{aux})			

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
<div><p>F90 module</p><ul style="list-style-type: none">Slave addressing type: Standard addressWidth 90 mmWith COMBICON version: Delivery without COMBICON plug</div>						
Type	Connection	Inputs	Outputs			
4 inputs/ 4 outputs	Screw	 2- and 3-wire PNP transistor	PNP transistor 1 A	5	3RG9002-0DB00	1 1 unit 42C
		2- and 3-wire PNP transistor	PNP transistor 2 A	5	3RG9002-0DA00	1 1 unit 42C
		2- and 3-wire PNP transistor floating	PNP transistor 2 A	5	3RG9002-0DC00	1 1 unit 42C
	Combicon ¹⁾	 2- and 3-wire PNP transistor	PNP transistor 1 A	5	3RG9004-0DB00	1 1 unit 42C
		2- and 3-wire PNP transistor	PNP transistor 2 A	5	3RG9004-0DA00	1 1 unit 42C
		2- and 3-wire PNP transistor floating	PNP transistor 2 A	5	3RG9004-0DC00	1 1 unit 42C

¹⁾ Scope of supply does not include Combicon plug set 3RX9810-0AA00, this must be ordered separately, see "Accessories".

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
COMBICON plug sets For 4I/4O modules with COMBICON connection; one set comprises: <ul style="list-style-type: none"> 4 x 5-pole plug for connection Standard sensors/actuators 2 x 4-pole plug for AS-Interface and external auxiliary voltage 	5	3RX9810-0AA00		1	1 unit	42C

Overview



Counter module with spring-type terminals

The counter module is used to send hexadecimally coded count values (LSB=D0, MSB=D3) to a higher-level controller. The count value is increased by 1 for each valid count pulse at terminal 8. Beginning at 0, the module counts up to 15 and then begins again at 0. The controller adopts the current value and determines the number of pulses between two host invocations through subtraction from the previous value. The total number of count pulses is determined by adding these differences.


For the values sent to be unambiguous, no more than 15 count values are allowed between two host invocations or AS-Interface master invocations at terminal 8. The maximum permissible transmission frequency is calculated from these times:

$$f_{TRmax} = 15 / T_{max}$$

T_{max} : max. possible transmission time from the slave to the host

A further condition for the maximum frequency is the required pulse shape. For the counter to accept a pulse as valid, a Low must have been applied at the input for at least 300 μ s and a High for at least 1 ms.

This results in a maximum frequency of $f_{Zmax} = 1 / 1.3 \text{ ms} = 769 \text{ Hz}$ independently of the control system (see figure below).

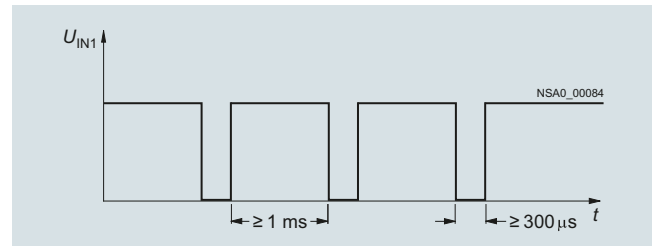


Maximum frequency for the counter module

If the time criterion stipulated in the figure is violated, the count value is rejected.

The counter is active only for the reset parameter P2 (default). The counter is deleted when P2 is set, and the incoming count pulses are not registered until after P2 is reset again.



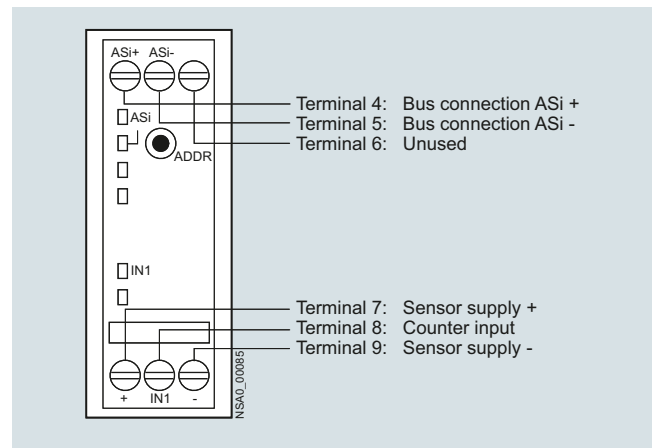

Note:

A customized function block is necessary or must be programmed.



Counter module connection options

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Counter modules						
Slave addressing type: Standard address						
Width 22.5 mm						
 3RK1200-0CE03-0AA2	• With screw terminals 	10	3RK1200-0CE03-0AA2	1	1 unit	42C
	• With spring-type terminals 	10	3RK1200-0CG03-0AA2	1	1 unit	42C
 3RK1200-0CG03-0AA2						

AS-Interface
Slaves
Modules with Special Functions

Ground-fault detection modules

Overview



Ground-fault detection module

"Ground faults in any control circuit must not lead to unintentional starting or potentially hazardous movements or prevent the machine from stopping." (IEC 60204-1 / VDE 0113-1).

The AS-Interface ground-fault detection module is used to meet these requirements. Using this module from the SlimLine series, ground faults in AS-Interface systems can be reliably detected and reported.




The following ground faults are detected:

- Ground fault from AS-i "+"
- Ground fault from AS-i "-"
- Ground fault from sensors and actuators that are supplied from the AS-Interface voltage.

Note:

Not suitable for AS-i Power24V.

Selection and ordering data


Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
 3RK1408-8KE00-0AA2	Ground-fault detection modules					
	Module does not require an AS-i address					
	Width 22.5 mm					
• With screw terminals		5	3RK1408-8KE00-0AA2	1	1 unit	42C
• With spring-type terminals		5	3RK1408-8KG00-0AA2	1	1 unit	42C

AS-Interface overvoltage protection module

Rated discharge current I_{sn}


Protection level U_p

Configuration guidelines



If insulated devices are protected, their mounts must be included in the grounding points.

Sample application

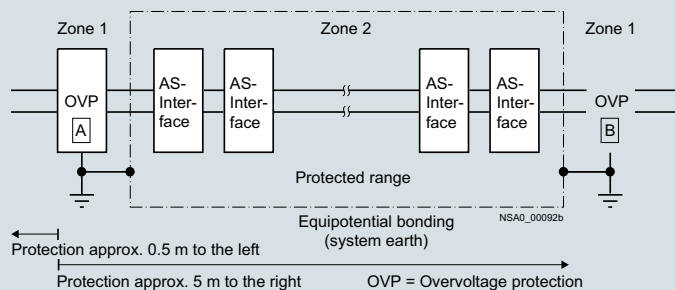

Selection and ordering data

A white industrial control unit with four rotary switches and a yellow cable. The unit is labeled 'PVC SCHWABE SAUER'.

AS-Interface

Power Supply Units and Data Decoupling Modules

AS-Interface power supply units

Overview



AS-Interface power supply unit for 3 A

AS-Interface power supply units feed 30 V DC into the AS-Interface cable and supply the AS-Interface components. They include power-optimized data decoupling for the separation of communication signals and control supply voltage. As the result, AS-Interface is able to convey both data and power along a single line. The power supply units are resistant to overload and short circuits.

Dimensions

AS-Interface power supply units have compact dimensions in widths of 50/70/120 mm. No distances from other devices need to be observed when mounting the power supply units.



Features

- Higher rating: The power supply units deliver currents of 2.6 to 8 A.
- Integrated data decoupling: As the result, AS-Interface is able to convey both data and power along a single line.
- Integrated ground-fault detection: The power supply units perform the reliable detection and signaling of ground faults according to IEC 60204-1. The AS-Interface voltage can be disconnected automatically in the event of a ground fault.
- Integrated overload detection: An output overload is detected and reported over a diagnostics LED.
- Diagnostics memory: Any ground faults or overloads on the output side are stored in a diagnostics memory until the device is RESET.
- Remote RESET and remote signaling: Using relay contacts, a ground fault can be signaled and evaluated by a central controller and/or indicator light.
- Diagnostics LEDs: Three different LEDs indicate the status of the AS-Interface power supply locally at the power supply unit.
- Ultra-wide input range/two-phase connection: The ultra-wide input range of 120 to 500 V of the 8 A version means that the supply units can be used in virtually any network worldwide. In addition, this version dispenses with the need for an N conductor as the device can be connected directly between 2 phases of a network.
- Operation with 24 V DC: The 3 A power supply unit is also available as a version with a 24 V DC input. This power supply unit is suitable for use in battery-powered systems or in systems with UPS (uninterruptible power supply).
- Removable terminal blocks with spring-type connections: For easy exchanging of devices, each power supply unit has three removable terminal blocks: for the input side, for the output side and for Signal/RESET connections.

Benefits

- Complete solution for supplying AS-Interface networks while making full use of the maximum possible cable length per AS-i segment
- Only AS-i masters and AS-i slaves need to be connected to the AS-Interface cable in order to operate AS-Interface
- Compact, space-saving dimensions
- Reliable power supply even for large numbers of AS-Interface modules with a high power requirement
- Integrated ground-fault and overload detection saves the need for additional components and enhances safety
- Fast fault detection and reduced downtimes thanks to diagnostics memory, remote signaling and remote RESET
- Reduced downtimes as the result of removable terminal blocks which enable the fast exchanging of devices
- Ultra-wide input range of the 8 A version permits single-phase and two-phase operation and removes the need for an N conductor
- Can be used world-wide thanks to, for example, UL/CSA approval (UL 508)
- With the 2.6 A version, the output power is restricted to max. 100 W for use in Class 2 circuits in accordance with NEC (National Electrical Code)

Selection and ordering data

Version	SD	Spring-type terminals	PU (UNIT, SET, M)	PS*	PG
Article No.		Price per PU			
AS-Interface power supply units, IP20					
<ul style="list-style-type: none"> • AS-i single output 30 V DC • With integrated ground-fault detection • 2.6 A version with output power restricted to max. 100 W (for Class 2 circuits in accordance with NEC) • Dimensions: Width: 50 mm (2.6 A/3 A), 70 mm (5 A), 120 mm (8 A); Height: 125 mm; Depth: 125 mm 					
 3RX9501-0BA00					
 3RX9503-0BA00					
Output current	Input voltage				
2.6 A/max. 100 W	120/230 V AC (selectable)	2	3RX9501-2BA00	1	1 unit 42C
3 A	120/230 V AC (selectable)	▶	3RX9501-0BA00	1	1 unit 42C
3 A	24 V DC	▶	3RX9501-1BA00	1	1 unit 42C
5 A	120/230 V AC (selectable)	▶	3RX9502-0BA00	1	1 unit 42C
8 A	120/230 ... 500 V AC (selectable)	▶	3RX9503-0BA00	1	1 unit 42C

Overview



PSN130S 30 V power supply units for 3 A, 4 A and 8 A

The PSN130S 30 V power supplies feed 30 V DC into the AS-Interface cable and supply the AS-Interface components, but do not include data decoupling. Data decoupling modules are needed in addition therefore to separate communication signals and control supply voltage, [see page 2/81 or 2/83](#).

The power supply units are resistant to overload and short circuits.

Dimensions

The 30 V power supply units have compact dimensions with widths of 50 and 70 mm. No distances from other devices need to be observed when mounting the power supply units.

Features


- Primary clocked power supply units for connection to a single-phase AC network
- Power for currents of 3 A, 4 A and 8 A
- The output voltage is floating, and resistant to short-circuits and no-load operation. If there is an overload, the output voltage is reduced or cut-off. After a short-circuit or overload, the devices start up again automatically.
- In the event of a device fault, the output voltage will be limited to max. 37 V.
- Modular installation devices in degree of protection IP20 and safety class I
- Diagnostics: With an output voltage > 26.5 V DC, the green LED (30V O.K.) is lit and the signaling contact 13-14 is closed.

Benefits

- Low-cost alternative solution for supplying AS-Interface networks while making full use of the maximum possible cable length per AS-i segment
- Cost advantage particularly for multiple networks
- Compact, space-saving dimensions
- Reliable power supply even for large numbers of AS-Interface modules with a high power requirement
- Can be used world-wide thanks to, for example, UL/CSA approval (UL 508)

Application

Configuration examples of AS-Interface networks with a 30 V power supply unit

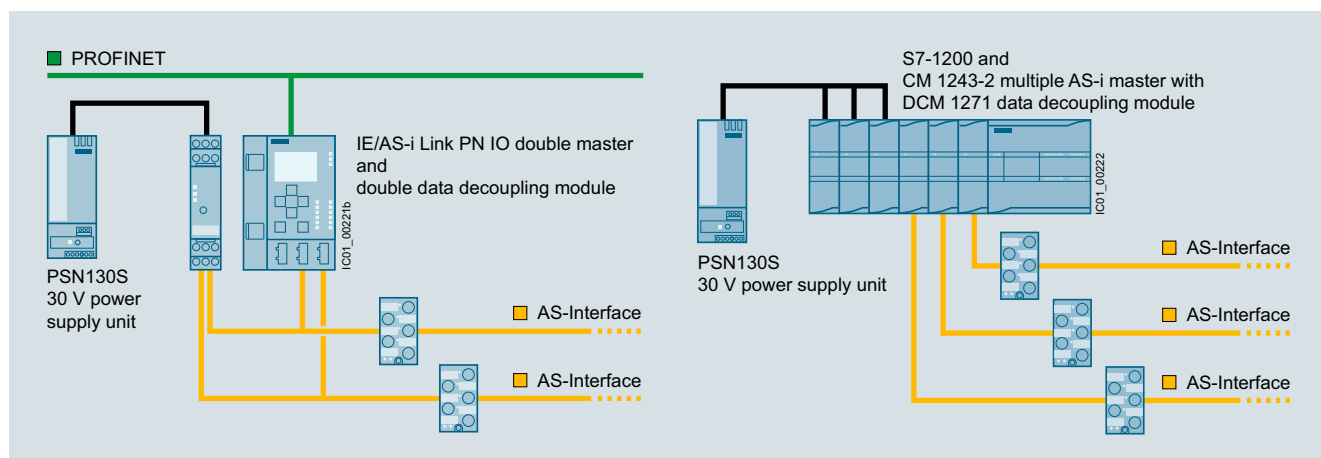

Configuration of AS-Interface multiple networks with one PSN130S 30 V power supply unit (examples with schematic representation):
 Left: Double network based on the S22.5 double data decoupling module and IE/AS-i Link PN IO double master
 Right: Triple network based on the SIMATIC S7-1200 with DCM 1271 data decoupling modules and CM 1243-2 communication processors

AS-Interface

Power Supply Units and Data Decoupling Modules

30 V power supply units

Technical specifications

Version		3 A	4 A	8 A
Input data				
• Input voltage, rated value U_e	V AC	120/230 V, single-phase, automatic selection		
• Range of input voltage	V AC	85 ... 132/174 ... 264		
• Mains frequency	Hz	50/60		
• Power consumption at full load, typ.	W	103	139	270
Output data				
• Output voltage, rated value U_a	V DC	30		
• Residual ripple	mV _{ss}	< 150		
• Output current, rated value at -20 ... +60 °C	A	3	4	8
• Max. output current at +60 ... +70 °C	A	3	3	4
Degree of efficiency in rated conditions				
• Degree of efficiency	%	87	88	90
• Power loss, typ.	W	12	17	25
Protection and monitoring				
• Output overvoltage protection	V	< 37		
• Current limit, typ.	A	4	5.5	11
Safety				
• Primary/secondary electrical isolation		Output voltage PELV/SELV according to IEC 60950 and EN 50178		
• Protection class		I		
• Degree of protection		IP20		

Version		3 A	4 A	8 A
Approvals				
• UL		UL 508/CSA 22.2		
• Pollution degree		IEC 60950		
• Overvoltage category and electrical separation		EN 50178 and IEC 61558		
EMC				
• Emitted interference (class B)		IEC 61000-6-3		
• Line harmonics limit		IEC 61000-3-2		
• Interference immunity		IEC 61000-6-2		
Operating data				
Ambient temperature				
• Operation	°C	-20 ... +70		
• Transport/storage	°C	-40 ... +85		
Pollution degree		2		
Humidity class		Climate class according to DIN 50010, relative air humidity max. 100%, without condensation		
Dimensions and weight				
• Width	mm	50	50	70
• Height x depth	mm	125 x 126.5		
• Weight	kg	0.4	0.4	0.7

Selection and ordering data

Version	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		
<p>PSN130S 30 V DC power supply unit (without AS-i data decoupling)</p> <ul style="list-style-type: none"> • Output voltage 30 V DC • Dimensions: Width: 50 mm (3 A/4 A); 70 mm (8 A); Height: 125 mm; Depth: 126.5 mm 					
3RX9511-0AA00					
3RX9512-0AA00					
3RX9513-0AA00					
Output current	Input voltage				
3 A	120/230 V AC (automatic selection)	2	3RX9511-0AA00	1	1 unit 42C
4 A	120/230 V AC (automatic selection)	2	3RX9512-0AA00	1	1 unit 42C
8 A	120/230 V AC (automatic selection)	2	3RX9513-0AA00	1	1 unit 42C

More information

More information

For operating instructions and other technical information, see <https://support.industry.siemens.com/cs/ww/en/view/64364000>

Overview



AS-Interface S22.5 double data decoupling module:
Screw terminal version (picture left),
Spring-type terminal version (picture right)

With the aid of the S22.5 data decoupling module, the AS-Interface network can also be supplied with 24 V DC or 30 V DC from a standard power supply unit and the transmission of data and power can be realized along one cable.

The combination of data decoupling modules and standard power supply units is therefore a cost-efficient alternative to the service-proven AS-Interface power supply units.

The quality of the data signals and the reliable operation of the AS-i network are not negatively affected as the result.

Features of the S22.5 data decoupling unit

- Degree of protection IP20
- Narrow design: 22.5 mm wide
- Version with screw or spring-type terminals
- Versions for single and double data decoupling
- Supply of several AS-i networks with a single power supply unit
- Operation with 24 V DC or 30 V DC, grounded or non-grounded
- Adjustable current limiting up to 2 x 4 A
- Integrated ground-fault detection with fault storage
- Diagnostics LEDs and signaling contacts
- RESET by button or remote RESET

Ground-fault detection

The integrated ground-fault detection works with a grounded and non-grounded supply: The connection of negative pole and ground (upstream from the data decoupling module) customary with 24 V DC power supplies is permitted. A ground fault to the negative or positive pole on the AS-Interface network (downstream from the data decoupling module) is detected and stored as a fault and will be signaled using LEDs and a relay contact.

Benefits

- Compatible expansion of the AS-Interface system
- An existing standard power supply unit with 24 V DC or 30 V DC can be used for supplying AS-i networks
- The AS-Interface system can also be used in tightly budgeted applications because no AS-Interface power supply unit needs to be purchased
- Applications benefit in addition from the advantages of a modern bus system:
 - High level of standardization
 - Additional diagnostics and maintenance information
 - Faster commissioning
- Easy and cost-efficient design of single and multiple networks is possible

Application

The AS-Interface data decoupling module is designed for AS-Interface networks with 30 V or 24 V supply (AS-i Power24V).

Operation of an AS-i network with the data decoupling module and a 30 V standard power supply unit is technically equivalent to the use of an AS-Interface power supply unit and offers the service-proven features of AS-Interface for all applications.

AS-Interface Power24V uses a 24 V power supply unit in conjunction with a data decoupling module and is particularly suitable for:

- Compact machines using AS-Interface input/output modules
- Applications in the control cabinet for AS-Interface integration of SIRIUS 3RT2 contactors using 3RA27 function modules

When using the double data decoupling module or other data decoupling units, several AS-Interface networks can be operated with a single power supply unit. This results in an additional cost advantage.

Note:

The power supply units must comply with the PELV (Protective Extra Low Voltage) or SELV (Safety Extra Low Voltage) standards, have a residual ripple of < 250 mV_{pp}, and in the event of a fault must limit the output voltage to a maximum of 40 V. We recommend SITOP power supplies ([see page 15/1 onwards](#)) or PSN130S 30 V power supplies ([see page 2/79 onwards](#)).

Note on AS-i Power24V:

The length of an AS-i Power24V network is restricted to 50 m in order to limit the voltage drop along the cable.

AS-i masters, AS-i slaves and the sensors and actuators supplied through the AS-i cable must be designed for the reduced voltage. Sensors and actuators for the standard voltage range of 10 to 30 V can be supplied with sufficient voltage.

Please also observe the requirements specified in "Extension of AS-i Power24V" for implementation of AS-i Power24V, [see page 2/21](#).


For more information on AS-i Power24V, [see "AS-Interface System Manual"](#), <https://support.industry.siemens.com/cs/ww/en/view/26250840>.

AS-Interface

Power Supply Units and Data Decoupling Modules



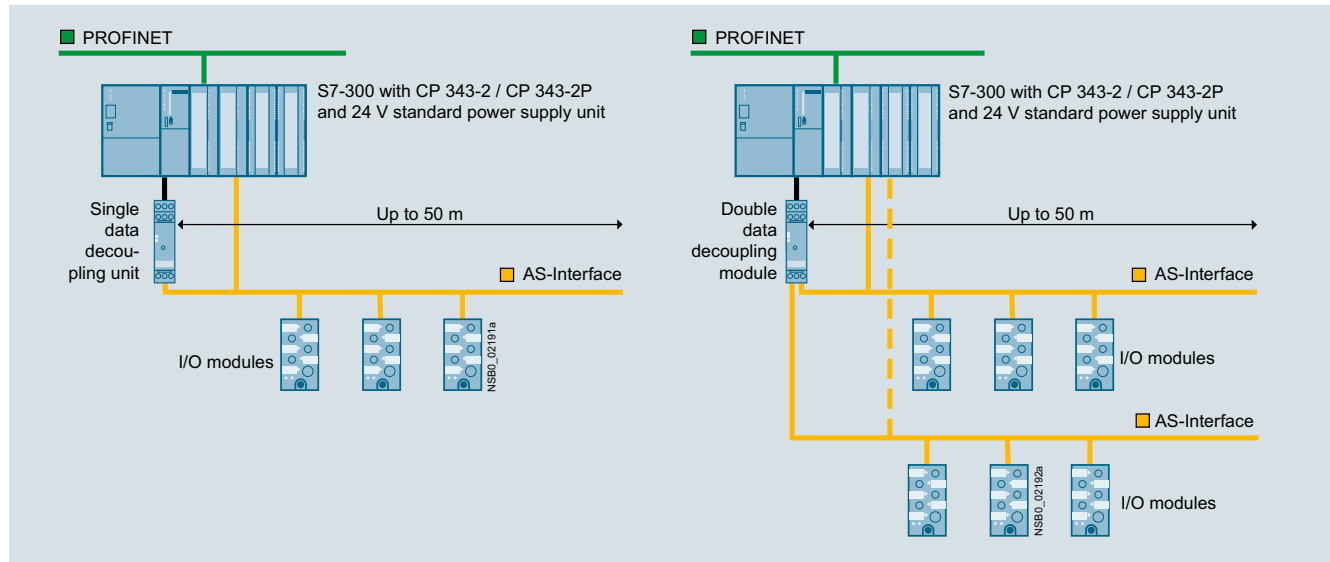

S22.5 data decoupling modules

Construction of an AS-i Power24V network with an AS-Interface S22.5 data decoupling module



Left: single network, right: Multiple network

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
 3RK1901-1DE12-1AA0	S22.5 data decoupling modules With screw terminals, removable terminals, width 22.5 mm, height 101 mm, depth 115 mm <ul style="list-style-type: none">• Single data decoupling module, 1 x 4 A• Double data decoupling module, 2 x 4 A		Screw terminals 			
	2	3RK1901-1DE12-1AA0		1	1 unit	42C
	2	3RK1901-1DE22-1AA0		1	1 unit	42C
 3RK1901-1DG12-1AA0	S22.5 data decoupling modules With spring-type terminals, removable terminals, width 22.5 mm, height 105 mm, depth 115 mm <ul style="list-style-type: none">• Single data decoupling module, 1 x 4 A• Double data decoupling module, 2 x 4 A		Spring-type terminals 			
	▶	3RK1901-1DG12-1AA0		1	1 unit	42C
	▶	3RK1901-1DG22-1AA0		1	1 unit	42C

AS-Interface

Power Supply Units and Data Decoupling Modules

Data Decoupling Modules for S7-1200

DCM 1271 data decoupling module

Overview



DCM 1271 data decoupling module for SIMATIC S7-1200

With the aid of the DCM 1271 data decoupling module, the AS-Interface network can also be supplied with 24 V DC or 30 V DC from a standard power supply unit and the transmission of data and power can be realized along one cable.

The DCM 1271 data decoupling module has the same enclosure design as the S7-1200 module and is therefore ideal for combining with the CM 1243-2 AS-i master.

The DCM 1271 data decoupling module has no connection to the backplane bus of the SIMATIC S7-1200 and is not counted as a communication module when calculating the maximum configuration.

Features of the DCM 1271 data decoupling module

- Design: S7-1200, 30 mm wide, degree of protection IP20
- Detachable terminals (scope of supply)
- Single data decoupling
- Supply of several AS-i networks with a single power supply unit
- Operation with 24 V DC or 30 V DC, grounded or non-grounded
- Current limiting at 4 A
- Integrated ground-fault detection
- Diagnostics LEDs for ground faults and overloads
- Signaling contacts for ground-fault detection

Ground-fault detection

The integrated ground-fault detection works with a grounded and non-grounded supply: The connection of negative pole and ground (upstream from the data decoupling module) customary with 24 V DC power supplies is permitted. A ground fault to the negative or positive pole on the AS-Interface network (behind the data decoupling module) is identified and signaled via LED and a transistor output.

Benefits

- An existing standard power supply unit with 24 V DC or 30 V DC can be used for supplying AS-i networks
- The AS-Interface system can also be used in tightly budgeted applications because no AS-Interface power supply unit needs to be purchased
- Applications benefit in addition from the advantages of a modern bus system:
 - High level of standardization
 - Additional diagnostics and maintenance information
 - Faster commissioning

Application

The AS-Interface data decoupling module is designed for AS-Interface networks with 30 V or 24 V supply (AS-i Power24V).

Operation of an AS-i network with the data decoupling module and a 30 V standard power supply unit is technically equivalent to the use of an AS-Interface power supply unit and offers the service-proven features of AS-Interface for all applications.

AS-i Power24V uses a 24 V power supply unit in conjunction with a data decoupling module and is particularly suitable for

- Compact machines using AS-Interface input/output modules
- Applications in the control cabinet for AS-Interface integration of SIRIUS 3RT2 contactors using 3RA27 function modules

Note:

The power supply units must comply with the PELV (Protective Extra Low Voltage) or SELV (Safety Extra Low Voltage) standards, have a residual ripple of < 250 mV_{pp}, and in the event of a fault must limit the output voltage to a maximum of 40 V. We recommend SITOP power supplies (see page 15/1 onwards) or PSN130S 30 V power supplies (see page 2/79 onwards).


Note on AS-i Power24V:

The length of an AS-i Power24V network is restricted to 50 m in order to limit the voltage drop along the cable.

AS-i masters, AS-i slaves and the sensors and actuators supplied through the AS-i cable must be designed for the reduced voltage. Sensors and actuators for the standard voltage range of 10 to 30 V can be supplied with sufficient voltage.



Please also observe the requirements specified in "Extension of AS-i Power24V" for implementation of AS-i Power24V, see page 2/21.

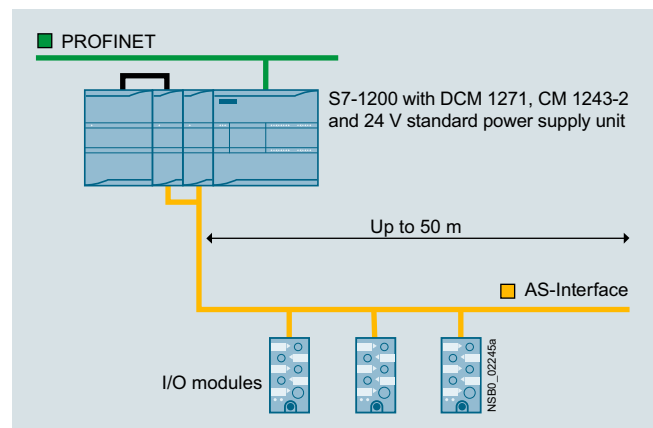For more information on AS-i Power24V, see "AS-Interface System Manual", <https://support.industry.siemens.com/cs/ww/en/view/26250840>.





Configuration of an AS-i Power24V network with DCM 1271 AS-Interface data decoupling unit

AS-Interface**Power Supply Units and Data Decoupling Modules****Data Decoupling Modules for S7-1200****DCM 1271 data decoupling module****Selection and ordering data**

Version	SD	Screw terminals 	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		
 3RK7271-1AA30-0AA0	2	DCM 1271 data decoupling module <ul style="list-style-type: none"> With screw terminals, removable terminals (included in the scope of supply) Dimensions (W x H x D/mm): 30 x 100 x 75 3RK7271-1AA30-0AA0	1	1 unit	42C

Accessories


Version	SD	Screw terminals 	PU (UNIT, SET, M)	PS*	PG
	d	Article No.	Price per PU		
	5	Screw terminals (replacement) <ul style="list-style-type: none"> 5-pole for AS-i master CM 1243-2 and AS-i DCM 1271 data decoupling module 3RK1901-3MA00	1	1 unit	42C
	5	<ul style="list-style-type: none"> 3-pole For AS-i DCM 1271 data decoupling module for connecting the power supply unit 3RK1901-3MB00	1	1 unit	42C
 3RK7243-2AA30-0XB0	2	CM 1243-2 communication module <ul style="list-style-type: none"> AS-Interface masters for SIMATIC S7-1200 Corresponds to AS-Interface specification V3.0 With screw terminals, removable terminals (included in the scope of supply) Dimensions (W x H x D/mm): 30 x 100 x 75 see also from page 2/32 onwards 3RK7243-2AA30-0XB0	1	1 unit	42C

More information**More information**

More information on AS-i Power24V, see System Manual "AS-Interface", <https://support.industry.siemens.com/cs/ww/en/view/26250840>

Manual for AS-i master CM 1234-2 and AS-i DCM 1271 data decoupling module, see <https://support.industry.siemens.com/cs/ww/en/view/57358958>

Overview

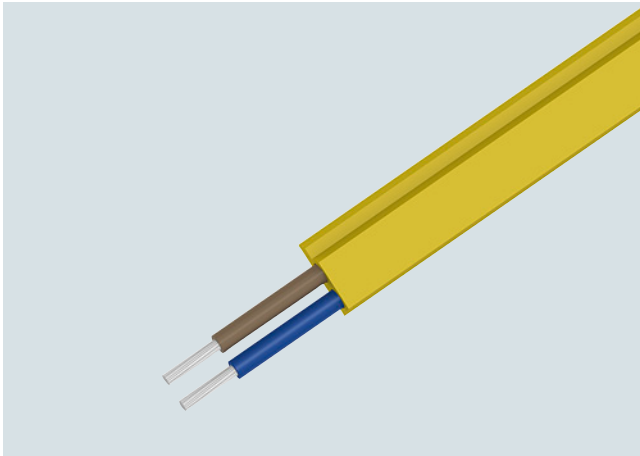

AS-Interface shaped cable

The actuator-sensor interface – the networking system used for the lowest field area – is characterized by very easy mounting and installation. A new connection method was developed specially for AS-Interface.

The stations are connected using the AS-Interface cable. This two-wire AS-Interface shaped cable has a trapezoidal shape, thus ruling out polarity reversal.

Connection is effected by the insulation piercing method. In other words, male contacts pierce the shaped AS-Interface cable and make reliable contact with the two wires. Cutting to length and stripping are superfluous. Consequently, AS-Interface stations (e.g. I/O modules, intelligent devices) can be connected in the shortest possible time and exchanging devices is quick.

To enable use in the most varied ambient conditions (e.g. in an oily environment), the AS-Interface cable is available in different materials (rubber, TPE, PUR).

For special applications it is also possible to use an unshielded standard round cable H05VV-F 2 x 1.5 mm² according to AS-i specification. With AS-Interface, data and energy for the sensors (e.g. proximity switches) and actuators (e.g. indicator lights) are transmitted over the yellow AS-Interface cable.

The black AS-Interface cable must be used for actuators with a 24 V DC supply (e.g. solenoid valves) and a high power requirement.

Suitable for operation in tow chains

The use of the AS-Interface shaped cables with TPE and PUR outer sheath was checked in a tow chain test with the following conditions:

Chain length	m	6
Travel	m	10
Bending radius	mm	75
Travel speed	m/s	4
Acceleration	m/s ²	4
Number of cycles		10 million
Duration of test		approx. 3 years (11 000 cycles per day)


After termination of the 10 million cycles only slight wear was visible due to the lugs of the tow chain. No damage to the cores and core insulation could be detected.

Note:

When using a tow chain, the cables must be installed in such a way that they are not subject to tensile forces. On no account may the cables be twisted, but they must be routed flat through the tow chain.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					



3RX90...-0AA00

AS-Interface shaped cables

Material	Color	Quantity						
Rubber	Yellow (AS-Interface)	100 m roll	2	3RX9010-0AA00	1	1 unit	42C	
	Yellow (AS-Interface)	1 km drum	5	3RX9012-0AA00	1	1 unit	42C	
	Black (24 V DC)	100 m roll	2	3RX9020-0AA00	1	1 unit	42C	
	Black (24 V DC)	1 km drum	5	3RX9022-0AA00	1	1 unit	42C	
TPE	Yellow (AS-Interface)	100 m roll	2	3RX9013-0AA00	1	1 unit	42C	
	Yellow (AS-Interface)	1 km drum	5	3RX9014-0AA00	1	1 unit	42C	
	Black (24 V DC)	100 m roll	2	3RX9023-0AA00	1	1 unit	42C	
	Black (24 V DC)	1 km drum	5	3RX9024-0AA00	1	1 unit	42C	
TPE special version according to UL Class 2	Yellow (AS-Interface)	100 m roll	5	3RX9017-0AA00	1	1 unit	42C	
	Black (24 V DC)	100 m roll	5	3RX9027-0AA00	1	1 unit	42C	
PUR	Yellow (AS-Interface)	100 m roll	2	3RX9015-0AA00	1	1 unit	42C	
	Yellow (AS-Interface)	1 km drum	5	3RX9016-0AA00	1	1 unit	42C	
	Black (24 V DC)	100 m roll	2	3RX9025-0AA00	1	1 unit	42C	
	Black (24 V DC)	1 km drum	5	3RX9026-0AA00	1	1 unit	42C	

AS-Interface

System Components and Accessories

Repeaters

Overview



AS-Interface repeater

The AS-Interface repeater is used to extend the AS-Interface cable.

- In its basic version, an AS-i network comprises one segment with a maximum cable length of 100 m. An extension plug (see page 2/87) can be used to increase the cable length for a segment to a maximum of 200 m.
- If this is insufficient, however, you can use one or more repeaters
- A repeater adds an extra segment to an existing segment. The extra segment can have a cable length of up to 100 m (without extension plug) or up to 200 m (with an extension plug in the extra segment)
- Each segment requires a separate AS-i power supply unit
- Electrical separation of the two AS-Interface shaped cable lines
- Slaves can be used on both sides of the repeater
- The additional power supply can increase the current infeed for slaves/sensors and lower the voltage drop on the AS-i cable
- Separate display of the correct AS-Interface voltage for each segment
- Installed in K45 module enclosure IP67 with mounting plate
- Easy mounting

Benefits

- More possibilities of use and greater freedom for plant planning through extension of the AS-Interface network
- Reduced downtime and servicing times in the event of a fault thanks to separate display of the correct AS-Interface voltage for each side

Design of an AS-Interface network with repeaters


- Parallel switching of several repeaters possible (star configuration)
- Combination of series and parallel switching possible

The following conditions apply:

- When used without an extension plug no more than two repeaters are permitted between AS-i master and slave (repeaters connected in series)
- When used with an extension plug no more than one repeater is permitted between AS-i master and slave

In safety-related applications the following also applies:

- When used without an extension plug, no more than two repeaters are permitted between evaluation unit (e.g. MSS ASIsafe Modular Safety System, F-CM AS-i Safety ST for ET 200SP) and ASIsafe input slave or safe output module.
- When used with an extension plug, no more than one repeater is permitted between the evaluation unit (e.g. MSS ASIsafe Modular Safety System, F-CM AS-i Safety ST for ET 200SP) and ASIsafe input slave or safe output module.

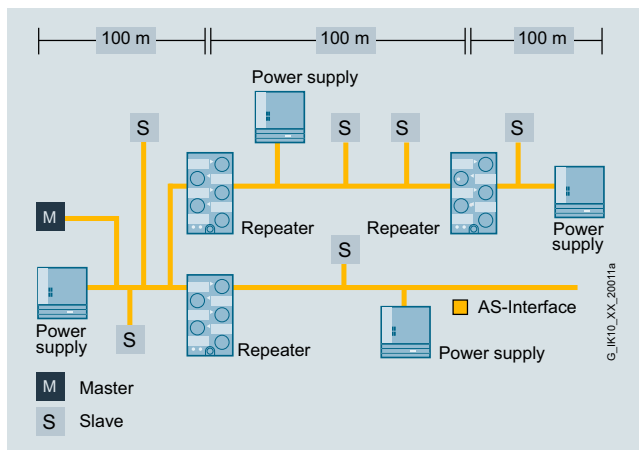

Design of an example AS-Interface network with repeaters (without extension plug)

Note:


The AS-Interface repeater is not suitable for AS-i Power24V networks. It is recommended for use in AS-Interface networks with AS-Interface power supply units (e.g. 3RX9501-0BA00).

Application

The repeater is used to extend the AS-Interface network. In this case there are AS-Interface slaves and one AS-Interface power supply unit on each side of the repeater.

In the case of a line topology with two repeaters and three extension plugs, the maximum possible size of the AS-Interface network is 600 m, see example configuration with extension plug on page 2/87.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 Repeaters for AS-Interface For cable extension, scope of supply includes mounting plate (for wall and standard rail mounting), module does not require an AS-i address	5	6GK1210-0SA01		1	1 unit	42C

6GK1210-0SA01

Overview



AS-Interface extension plug compact

With the extension plug it is possible to double the cable length possible in an AS-Interface segment from 100 to 200 m.

Only one power supply unit is needed to supply power to the slaves on the up to 200 m long segment.

The extension plug compact can be installed directly onto an AS-i shaped cable. A separate M12 feeder, as was required for earlier extension plug versions, is no longer required with extension plug compact.


Design of an AS-Interface segment with an extension plug

To construct an AS-Interface segment with a cable length of more than 100 m and up to a maximum of 200 m, the extension plug is installed in a radius of around ± 10 m at the point of the network that is furthest from the power supply unit. The extension plug is not allowed to be used in AS-Interface networks smaller than 100 m. As with all AS-Interface networks, any network structure (line, tree, star) is possible when using the extension plug. Only one extension plug is required per 200 m segment even with a tree or star structure.

Note:


The AS-i bus cable must not terminate in the extension plug compact. The AS-Interface shaped cable can be terminated by means of a cable terminating piece to provide degree of protection IP67 where required, see "Miscellaneous accessories" on page 2/95.

The AS-Interface extension plug is not suitable for AS-i Power24V networks.

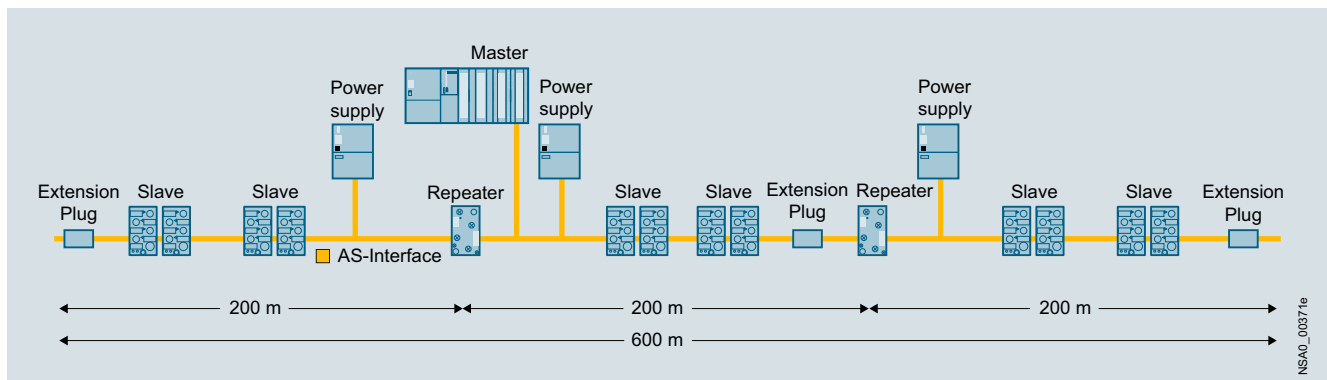


Maximum network size with repeaters and extension plug (master at center of network)

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
	2	3RK1901-1MX02		1	1 unit	42C
AS-Interface Extension Plug Compact <ul style="list-style-type: none"> • Doubling of the cable length to 200 m per AS-Interface segment • With direct connection to AS-Interface shaped cable • Module does not require an AS-i address 						

3RK1901-1MX02

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
	►	3RK1901-1MN00		1	10 units	42C
Cable terminating piece For sealing of open cable ends (shaped AS-Interface cable) in IP67						

3RK1901-1MN00

AS-Interface

System Components and Accessories

Addressing units

Overview



The innovated addressing unit for AS-Interface of the AS-i specification V3.0.

The addressing unit is used to assign an address during commissioning to each AS-Interface slave. The device detects a connected slave module or a complete AS-i network and displays the found module in the LCD display. Each address can be individually set using the Up/Down keys. By turning the rotary switch, further commissioning functions are selected intuitively. The innovative device has been adapted to the current AS-i specification V3.0 and can now also handle the I/O data of the latest slaves.

Functionality

- Reading out and adjusting the slave address 0 to 31 or 1A to 31A, 1B to 31B, with automatic addressing aid and prevention of double addresses
- Reading out the slave profile (IO, ID, ID2)
- Reading out and adjusting the ID1 code
- Input/output test when commissioning the slaves: Read input signals and write outputs with all digital and analog slaves according to AS-Interface specification V3.0, including safe input slaves and complex CTT2 slaves
- Measuring the voltage on the AS-Interface cable (measuring range from 2 to 35 V)
- Display of the operational current in case of direct connection of an AS-i slave (measuring range from 0 to 150 mA)
- Storage of complete network configurations (profiles of all slaves) to simplify the addressing
- Adjusting the slave parameters for commissioning
- Reading out the identification and diagnostics of CTT2 slaves
- Reading out the code table of safe input slaves (ASIsafe)


Note:

For operation of the addressing unit on an AS-Interface cable with connected power supply unit, the following applies: The AS-Interface addressing unit is suitable for standard AS-i networks and AS-i Power24V networks (min. operational voltage on the AS-Interface cable 19 V).

Benefits






- Increased power supply to the slaves to 150 mA
- Better utilization of the battery capacity thanks to improved circuitry
- Support for the current AS-i specification V3.0
- Expanded display for simultaneously displaying input and output states
- Clearly recognizable display of status of digital inputs/outputs in binary format (0/1), optionally also available as hexadecimal values
- Intuitive display of analog data either as decimal, hexadecimal or as a percentage (e.g. 100% corresponds to input/output value 20 mA)
- I/O data of complex slaves (CTT2 profile) can be displayed
- Decoded display of the input data of safe input slaves, including code table
- Simplification of the operating steps when setting the slave address with automatic read back of the set address
- Addressing cable, ready for operation even without screwing in tight into the M12 socket, thus faster availability of the addressing unit
- Proven compact housing with smooth keys and rotary switch
- Connection of standard AS-i networks possible with 30 V as well as Power24V networks
- Complex slaves with high operating currents can be addressed without external supply
- Longer operating time by automatic shutdown after approx. 5 minutes (or approx. 1 minute when data exchange is active) after last operation
- Can be used with all types of digital and analog slaves
- Comprehensive and fast input/output test of plants, even for A/B slaves with 4 DI / 4 DQ and current analog modules with an A/B address
- Faster and more reliable commissioning of the AS-Interface modules
- One-hand operation possible, with unique selection of the functions
- Connection via M12 socket (pin 1: ASI+; Pin 3: ASI-; pins 2, 4, 5: not used)
- Universal applicability for all AS-i networks

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
 AS-Interface addressing unit V3.0 <ul style="list-style-type: none"> • For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i specification V3.0 • for setting the AS-i address of slaves with standard addresses, and slaves with extended addressing mode (A/B slaves) • With input/output test function and many other commissioning functions • Battery operation with four type AA batteries (IEC LR6, NEDA 15) • Degree of protection IP40 • Dimensions (W x H x D) mm: 84 x 195 x 35 • Scope of supply: <ul style="list-style-type: none"> - Addressing unit with 4 batteries - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m 	2	3RK1904-2AB02		1	1 unit	42C

3RK1904-2AB02

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RK1902-4PB15-3AA0	5	Addressing cable, with M12 plug to M12 socket¹⁾ <ul style="list-style-type: none">For addressing slaves with M12 connection, e.g. K20 or K60R modules or light curtainsLength 1.5 m, 3-pole, 3 x 0.34 mm²		1	1 unit	42D
 3RX9801-0AA00	►	AS-Interface M12 3RX feeder <ul style="list-style-type: none">Transition of AS-Interface cable to a standard round cableInsulation piercing method for connection of AS-Interface cableM12 socket for connection of standard round cableCurrent carrying capacity up to 2 A		1	1 unit	42C
 3RK1901-2NR10	2	AS-Interface M12 3RK feeder <i>NEW</i> <ul style="list-style-type: none">AS-Interface cable transition without U_{aux}, with M12 socketInsulation piercing method for connection of AS-Interface cableM12 socket for connection of standard round cable		1	1 unit	42C
 3RK1902-4HB50-5AA0	5	M12 cable plug²⁾ <ul style="list-style-type: none">Extruded M12 plug (angled cable feeder 90°), other cable end openLength: 5 m, 5-pole, color: Black		1	1 unit	42D
 3RK1902-4BA00-5AA0	5	M12 plug straight²⁾ <ul style="list-style-type: none">For screw fixing, 5-pole screw terminal, max. 0.75 mm²A-coded, max. 4 A		1	1 unit	42D
		Addressing cable, with M12 plug to addressing plug (hollow plug)³⁾ <ul style="list-style-type: none">Included in the scope of supply of the addressing unitLength 1.5 m	Z236A			

¹⁾ Not included in scope of supply of the 3RK1904-2AB02 addressing unit.

²⁾ For connecting the addressing unit to an AS-i network via AS-Interface M12 feeder, a connecting cable (M12 plug to M12 plug) must be produced and requires the following wiring:


- M12 cable plug: Pin 1 / core brown ↔ M12 plug: Pin 1
- M12 cable plug: Pin 3 / core blue ↔ M12 plug: Pin 3
- Pin 2, 4, 5 not connected.

³⁾ Can only be ordered from GMC-I Messtechnik GmbH, see "External partners", page 16/16.

AS-Interface System Components and Accessories

Analyzer

Overview

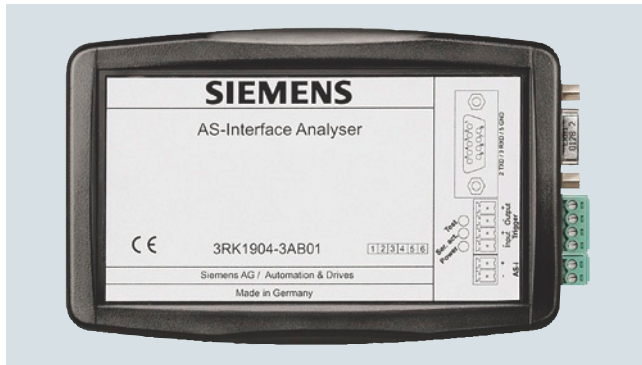

AS-Interface analyzer


The AS-Interface analyzer is used to test AS-Interface networks.

Installation errors, e.g. loose contacts or EMC interference under extreme loads, can be revealed by this device.

Thanks to the easy-to-use software the user can assess the quality of complete networks even if he lacks detailed specialist knowledge of AS-Interface. In addition it is an easy matter with the AS-Interface analyzer to create test logs from the records produced, thus providing documentation for startups and service assignments.

For advanced AS-Interface users there are trigger functions for detailed diagnostics.

Connection

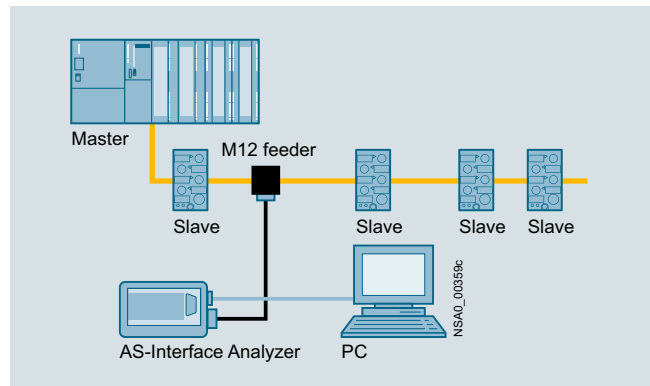

Connection of AS-Interface analyzer to PC and AS-Interface network

The AS-Interface analyzer follows the communication on the AS-Interface network as a passive station. The unit is supplied simultaneously from the AS-Interface cable.

This analyzer interprets the physical signals on the AS-Interface network and records the communication.


The data thus obtained is transferred through an RS 232 interface to a PC such as a notebook, for evaluation with the supplied diagnostics software.

Benefits

- Simple and user-friendly operation enables diagnostics of AS-Interface networks without help from specialists
- Speedy troubleshooting thanks to intuitive display in statistics mode
- Test logs provide verification of the state and quality of the installation for service and approval
- Recorded logs facilitate remote diagnostics by technical support
- Comprehensive trigger functions enable exact analysis
- Process data can be monitored online


Application

Online statistics

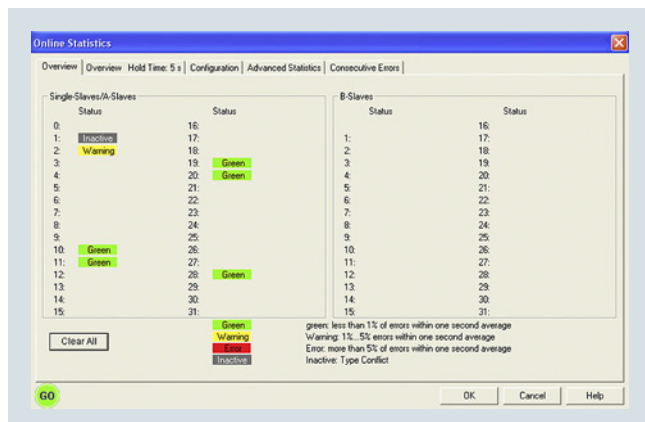


Online statistics, overview

Data mode

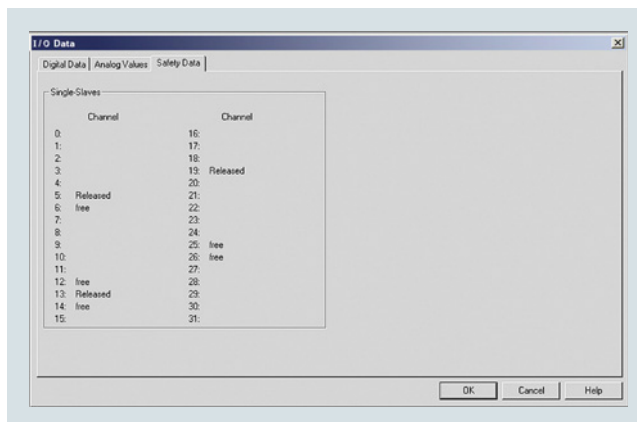

Presentation of the I/O data: Safety data

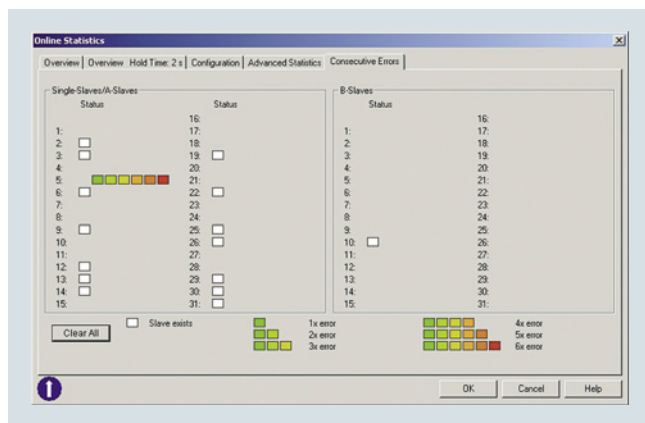


Online statistics, details, e.g. here a fault on slave 5

This mode provides a quick overview of the existing AS-Interface system. The error rates are displayed per slave in a traffic-light function (green, yellow, red).

The bus configuration and the currently transmitted data of the slaves are shown in a well arranged presentation.

With the expanded statistics function, it is possible to determine the error rates as the number of transmitted or faulty bus message frames.

The bundle error overview shows in steps how many multiple repetitions of message frames occurred in order to enable a selective and look-ahead assessment of the transmission quality.

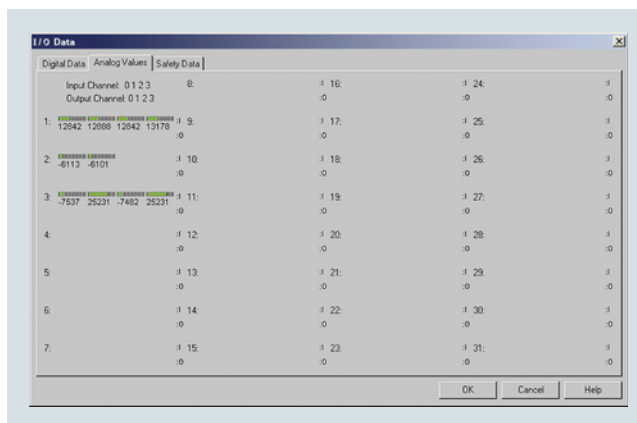

Presentation of the I/O data: Analog values

In this mode, the analyzer shows not only the digital input/output values but also the current analog values and the input status of the safety slaves.

AS-Interface System Components and Accessories

Analyzer

Trace mode

Pos	Time	Slave	Data_Exchange	Master Daten	Master Parameter	D3020100 (Response)	Analyse
989	153	5	Data_Exchange	0 0 1 1 1 1 17	0 1 1 0	No Error	
990	152	8	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
991	153	11	Data_Exchange	0 0 1 1 1 1 16	1 1 1 0	No Error	
992	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
993	152	15	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
994	152	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
995	154	22	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
996	165	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
997	152	2	Data_Exchange	0 0 1 1 1 1 16	0 1 1 0	No Error	
998	152	3	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
999	153	5	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
1000	153	11	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1001	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
1002	153	15	Data_Exchange	0 0 1 1 1 1 15	0 0 0 0	No Error	
1003	153	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1004	155	23	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
1005	165	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
1006	152	2	Data_Exchange	0 0 1 1 1 1 17	0 1 0 0	No Error	
1007	152	3	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1008	153	5	Data_Exchange	0 0 1 1 1 1 16	1 1 1 0	No Error	
1009	152	8	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
1010	152	11	Data_Exchange	0 0 1 1 1 1 16	1 1 0 1	No Error	
1011	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
1012	152	15	Data_Exchange	0 0 1 1 1 1 18	0 0 0 0	No Error	
1013	152	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1014	155	24	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
1015	166	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
1016	152	2	Data_Exchange	0 0 1 1 1 1 16	0 1 1 0	No Error	
1017	152	3	Data_Exchange	0 0 1 1 1 1 15	0 0 0 0	No Error	
1018	152	5	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	

Presentation of message frames in trace mode

The presentation of message frames in the style of a classic fieldbus analyzer is indispensable for complex troubleshooting. Extensive trigger functions and recording and viewing filters are available for this purpose. An external trigger input and trigger output round off the scope of functions in order to find even the most difficult errors.

For troubleshooting in connection with ASIsafe applications, changes of status in the code tables of safety slaves are identified and assessed.

The AS-i analyzer can be used with an AS-i master in accordance with AS-Interface specification V3.0 or a predecessor version.

The analyzer does not automatically decode the process values for type CTT2 - CTT5 AS-i slaves. As for other slave types, the message frames are recorded and evaluated in the statistics. If required, decoding can also be performed by the user manually.

More information, see <https://support.industry.siemens.com/cs/ww/en/view/109746763>.

Test log

Date	Time	Slave	Data_Exchange	Master Daten	Master Parameter	D3020100 (Response)	Analyse
989	153	5	Data_Exchange	0 0 1 1 1 1 17	0 1 1 0	No Error	
990	152	8	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
991	153	11	Data_Exchange	0 0 1 1 1 1 16	1 1 1 0	No Error	
992	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
993	152	15	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
994	152	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
995	154	22	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
996	165	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
997	152	2	Data_Exchange	0 0 1 1 1 1 16	0 1 1 0	No Error	
998	152	3	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
999	153	5	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
1000	153	11	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1001	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
1002	153	15	Data_Exchange	0 0 1 1 1 1 15	0 0 0 0	No Error	
1003	153	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1004	155	23	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
1005	165	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
1006	152	2	Data_Exchange	0 0 1 1 1 1 17	0 1 0 0	No Error	
1007	152	3	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1008	153	5	Data_Exchange	0 0 1 1 1 1 16	1 1 1 0	No Error	
1009	152	8	Data_Exchange	0 0 1 1 1 1 16	1 1 0 0	No Error	
1010	152	11	Data_Exchange	0 0 1 1 1 1 16	1 1 0 1	No Error	
1011	152	14	Data_Exchange	0 0 0 1 1 1 16	0 0 0 0	No Error	
1012	152	15	Data_Exchange	0 0 1 1 1 1 18	0 0 0 0	No Error	
1013	152	21	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	
1014	155	24	Read_Status	1 1 1 1 1 0 -	- - - -	No Slave Response	
1015	166	1	Data_Exchange	0 0 1 1 1 1 29	1 0 0 0	No Error	
1016	152	2	Data_Exchange	0 0 1 1 1 1 16	0 1 1 0	No Error	
1017	152	3	Data_Exchange	0 0 1 1 1 1 15	0 0 0 0	No Error	
1018	152	5	Data_Exchange	0 0 1 1 1 1 16	0 0 0 0	No Error	

Example of a test log

The recorded data of the online statistics are easy to output and document using a test log. Verification of the state of the plant can thus be provided for approvals or service assignments.


The integrated measurement assistant records the bus signals for a variable duration, thereby triggering creation of an automatic test log. A standardized quality test of AS-i plants is thus possible.

Note:

The AS-Interface analyzer is suitable for standard AS-i networks and AS-i Power24V networks (min. operating voltage 20 V).

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						






3RK1904-3AB01

AS-Interface analyzer

- For testing AS-Interface systems
- For troubleshooting and service assignments in installations and networks with AS-Interface systems
- Dimensions (W x H x D): 145 x 30 x 92 mm
- Scope of supply:
 - AS-Interface analyzer
 - RS 232 cable for connecting to a PC
 - USB-to-serial/RS 232 adapter
 - Screwdriver
 - Magnetic adhesive tape for fastening the analyzer to metal surfaces
 - Service case with foam insert, dimensions (W x H x D/mm): approx. 260 x 70 x 200
 - Diagnostic software (CD-ROM) for PC with Windows operating system

2 **3RK1904-3AB01** 1 1 unit 42C

Accessories







Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 3RX9801-0AA00	►	3RX9801-0AA00		1	1 unit	42C
AS-Interface M12 3RX feeder <ul style="list-style-type: none"> • Transition of shaped AS-Interface cable to a standard round cable • Insulation piercing method for connection of AS-Interface cable • M12 socket for connection of standard round cable • Current carrying capacity up to 2 A • Degree of protection IP67 						
 3RK1901-2NR10	2	3RK1901-2NR10		1	1 unit	42C
AS-Interface M12 3RK feeder NEW <ul style="list-style-type: none"> • AS-Interface cable transition without U_{aux}, with M12 socket • Insulation piercing method for connection of AS-Interface cable • M12 socket for connection of standard round cable • Max. 4 A • Degree of protection IP67/IP68/IP69K 						
 3RK1902-4HB50-5AA0	5	3RK1902-4HB50-5AA0		1	1 unit	42D
M12 cable plugs <ul style="list-style-type: none"> • PUR cable, 5-pole • Length 5 m • Color black • Extruded M12 plug (angled cable feeder 90°), other cable end open 						

AS-Interface

System Components and Accessories

Miscellaneous accessories










Selection and ordering data

Version		SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG		
		d							
 3RK1901-2NN10	AS-Interface compact distributors, for AS-Interface flat cable NEW <ul style="list-style-type: none">• Current carrying capacity up to 8 A• Degree of protection IP67/IP68/IP69K		2	3RK1901-2NN10	1	1 unit	42C		
	AS-Interface M12 3RX feeder <ul style="list-style-type: none">• Degree of protection IP67• Current carrying capacity up to 2 A								
 3RX9801-0AA00	For flat cable	For	Cable length	Cable end in feeder					
	AS-i	M12 socket	--	Available	▶	3RX9801-0AA00	1	1 unit	42C
 3RK1901-2NR10	AS-Interface M12 3RK feeder NEW <ul style="list-style-type: none">• Degree of protection IP67/IP68/IP69K• Current carrying capacity up to 4 A								
	For flat cable	For	Cable length	Cable end in feeder					
	AS-i	M12 socket	--	Not available	2	3RK1901-2NR10	1	1 unit	42C
	AS-i	M12 cable box	1 m	Not available	2	3RK1901-2NR11	1	1 unit	42C
	AS-i	M12 cable box	2 m	Not available	2	3RK1901-2NR12	1	1 unit	42C
	AS-i/U _{aux}	M12 socket	--	Not available	2	3RK1901-2NR20	1	1 unit	42C
	AS-i/U _{aux}	M12 cable box	1 m	Not available	2	3RK1901-2NR21	1	1 unit	42C
	AS-i/U _{aux}	M12 cable box	2 m	Not available	2	3RK1901-2NR22	1	1 unit	42C
 3RK1901-2NR21									
 3RK1901-1NR04	AS-Interface M12 feeders, 4-fold <ul style="list-style-type: none">• Degree of protection IP67• Current carrying capacity up to 4 A								
	For flat cable	For	Cable length	Cable end in feeder					
	AS-i/U _{aux}	4-fold M12 socket, delivery includes mounting plate (for wall and stand-rail mounting)	--	Not available	2	3RK1901-1NR04	1	1 unit	42C
 6ES7194-1KA01-0XA0	M12 Y-shaped coupler plugs For connection of two sensors to one M12 socket with Y-assignment		1	6ES7194-1KA01-0XA0	1	1 unit	250		

AS-Interface

System Components and Accessories









Miscellaneous accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
AS-Interface sealing caps						
 3RK1901-1KA00	For free M12 sockets					
	►	• M12	3RK1901-1KA00	100	10 units	42C
	2	- Tamper proof	3RK1901-1KA01	100	10 units	42C
 3RK1901-1KA01	2	• M 8	3RK1901-1PN00	100	10 units	42C
 3RK1901-1PN00						
AS-Interface M20 seals						
 3RK1901-1MD00	2	• For AS-Interface cable, shaped • For insertion in M20 glands	3RK1901-1MD00	100	10 units	42C
Cable adapters for flat cables						
 3RK1901-3QM00	Connection of AS-Interface cable to metric gland with insulation piercing method					
		• Continuation using standard cable				
	5	- For M16 gland	3RK1901-3QM00	1	1 unit	42C
	5	- For M20 gland	3RK1901-3QM10	1	1 unit	42C
		• Continuation using pins				
 3RK1901-3QA00	10	- For M16 gland	3RK1901-3QM01	1	1 unit	42C
	5	- For M20 gland	3RK1901-3QM11	1	1 unit	42C
Cable clips for cable adapters						
	5		3RK1901-3QA00	100	10 units	42C
Cable terminating piece						
 3RK1901-1MN00	►	For sealing of open cable ends (shaped AS-Interface cable) in IP67	3RK1901-1MN00	1	10 units	42C
Mounting plates						
 3RK1901-2EA00		• K45				
	►	- For wall mounting	3RK1901-2EA00	1	1 unit	42C
	►	- For standard rail mounting	3RK1901-2DA00	1	1 unit	42C
		• K60, suitable for all K60 compact modules				
 3RK1901-0CA00	►	- For wall mounting	3RK1901-0CA00	1	1 unit	42C
	►	- For standard rail mounting	3RK1901-0CB01	1	1 unit	42C

AS-Interface

System Components and Accessories

Miscellaneous accessories

	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
  3RK1902-0AR00	Sealing sets <ul style="list-style-type: none">For K60 mounting plate and standard distributorCannot be used for K45 mounting plateOne set contains one straight and one shaped seal	2	3RK1902-0AR00		100	5 units	42D
	Inscription labels <ul style="list-style-type: none">For K45 and K60 compact modules20 x 9 mm, pastel turquoise19 frames with 20 labels each	15	3RT1900-1SB50		100	380 units	41B
 3RK1902-4GB50-4AA0	Control cable, assembled at one end Angular M12 plug for screw fixing, 4-pole, 4 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A <ul style="list-style-type: none">Cable length 5 m	5	3RK1902-4GB50-4AA0		1	1 unit	42D
 3RK1902-4CA00-4AA0	M12 socket, angled For screw mounting, 4-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A	5	3RK1902-4CA00-4AA0		1	1 unit	42D
 3RK1902-4BA00-5AA0	M12 plug For screw mounting, 5-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A <ul style="list-style-type: none">StraightAngled	5	3RK1902-4BA00-5AA0		1	1 unit	42D
 3RK1902-4DA00-5AA0		5	3RK1902-4DA00-5AA0		1	1 unit	42D
 3RK1902-4H...-5AA0	Control cable, assembled at one end Angular M12 plug for screw fixing, 5-pole, 5 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A <ul style="list-style-type: none">Cable length 1.5 mCable length 5 mCable length 10 m	5	3RK1902-4HB15-5AA0		1	1 unit	42D
		5	3RK1902-4HB50-5AA0		1	1 unit	42D
		5	3RK1902-4HC01-5AA0		1	1 unit	42D
 3RK1902-4PB15-3AA0	Control cable, assembled at both ends Straight M12 plug, straight M12 socket, for screw fixing, 3-pole, 3 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A <ul style="list-style-type: none">Cable length 1.5 mAlso for addressing AS-i slaves with M12 bus connection (e.g. K20, K60R compact modules, M200D motor starters)	5	3RK1902-4PB15-3AA0		1	1 unit	42D

More information


More information

System Manual "AS-Interface", see
<https://support.industry.siemens.com/cs/ww/en/view/26250840>

Overview

IO-Link is an open communication standard for sensors and actuators – defined by the PROFIBUS User Organization (PNO). IO-Link technology is based on the point-to-point connection of sensors and actuators to the control system.

Parameter and diagnostics data are transmitted in addition to the cyclic operating data for the connected sensors/actuators. The simple, unshielded three-wire cable customary for standard sensors is used for this purpose.

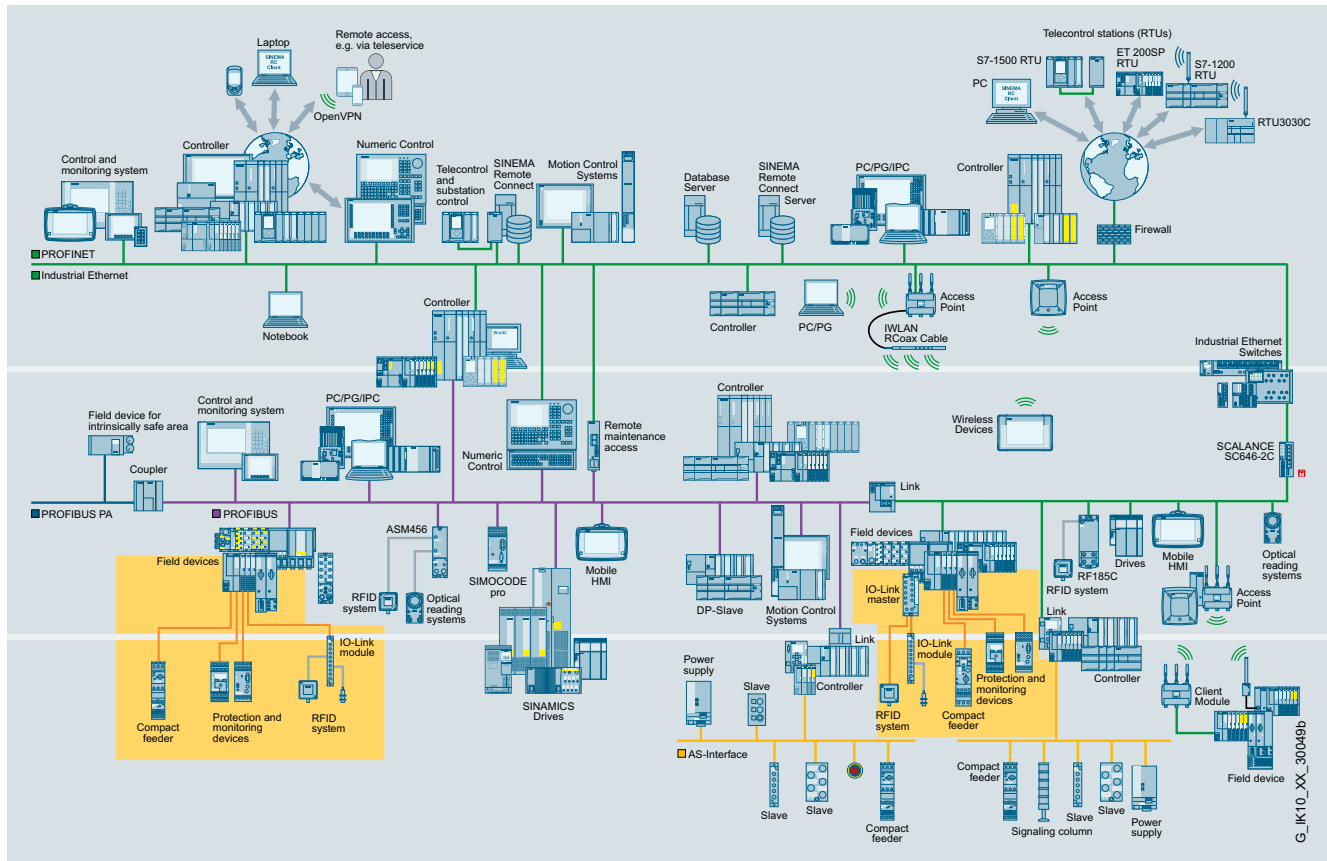

IO-Link in the SIMATIC NET communications landscape

Benefits

Engineering

- Standardized, open system for greater flexibility (non-Siemens IO-Link devices can be integrated in engineering)
- Uniform, transparent configuring and programming through integrated engineering (SIMATIC STEP 7)
- Unassigned SIMATIC function blocks for easy parameterization, diagnostics and read-out of measured values
- Efficient engineering thanks to pre-integration into SIMATIC HMI
- Low error rate in CAD circuit diagram design as a result of reduced control current wiring

Installation and commissioning

- Faster assembly with minimized error rate as a result of reduced control current wiring
- Less space required in the control cabinet
- Low-cost circuitry where there are several feeders by making full use of existing components

Operation and maintenance

- High transparency in the system right down to field level and integration into power management systems
- Reduction in downtimes and maintenance times thanks to system-wide diagnostics and faster fault correction
- Support of predictive maintenance
- Shorter changeover times, even for field devices, by means of parameter and recipe management

Application

IO-Link can be used in the following main applications:

- Easy connection of complex IO-Link sensors/actuators with a large number of parameters and diagnostic data to the control system
- Replacement of sensor boxes for connecting binary sensors with the IO-Link input modules optimized in terms of cabling
- Optimized cable connection of switching devices to the control system
- Simple transmission of energy values from the device to the control system for integration into a user program or power management

In these cases, all the diagnostics data is transmitted to the higher-level control system through IO-Link. The parameter settings can be changed during operation.

Integration in STEP 7

Integration of the device configuration in the STEP 7 environment guarantees:

- Quick and easy engineering
- Consistent data storage
- Quick localization and rectification of faults

IO-Link

Introduction

System components

Overview

More information

Homepage, see www.siemens.com/io-link


For important topics at a glance, see <https://support.industry.siemens.com/cs/ww/en/view/109737170>



IO-Link product family

To implement communication, a system installation has the following main components:

- An IO-Link master
- One or more IO-Link devices, such as sensors (e.g. RFID systems), actuators or combinations thereof
- A standard 3-wire sensor/actuator cable

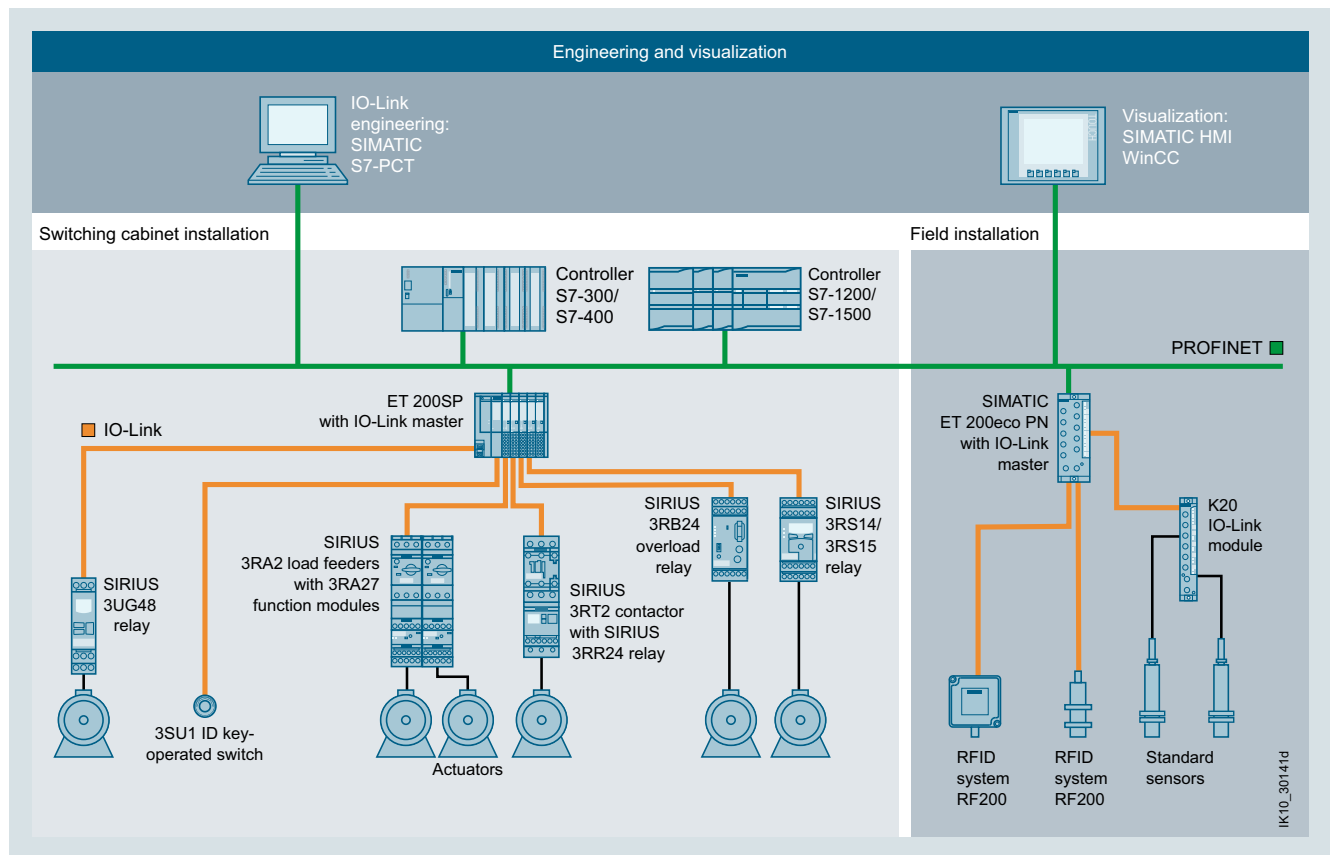

Example of a configuration with the system components

IO-Link compatibility

IO-Link ensures compatibility between IO-Link-capable modules and standard modules as follows:

- IO-Link sensors can generally be operated both on IO-Link modules (masters) and standard input modules.
- IO-Link sensors/actuators as well as today's standard sensors/actuators can be used on IO-Link masters.
- If conventional components are used in the IO-Link system, then of course only the standard functions are available at this point.

Analog signals

Another advantage of IO-Link technology is that analog signals are already digitized in the IO-Link sensor itself and are digitally transmitted via IO-Link communication. As the result, faults are prevented and there is no extra cost for cable shielding.

Enhancement with IO-Link input modules

IO-Link compatibility also permits connection of standard sensors/actuators, i.e. conventional sensors/actuators can also be connected to IO-Link. This is particularly cost-effective with the IO-Link input modules, which allow several sensors to be connected at one time via a cable to the controller.


Overload relays

A starter combination, for example, consists of one or more SIRIUS 3RT contactors and one 3RB24 electronic overload relay for IO-Link plus its 3RB29 current measuring module.

3RB24 overload relays with IO-Link are basically designed to provide current-dependent protection for loads against inadmissibly high temperature rises due to overload, phase asymmetry or phase failure.

Direct-on-line starters can, therefore, as shown in the image, be connected to the control system via IO-Link without much wiring. Remote control of connected contactors, current value transmission and immediate remote fault diagnosis are just some examples of the large number of functions that can be implemented with this device.


It is also possible to directly address a drive on-site via IO-Link using the optional hand-held device.

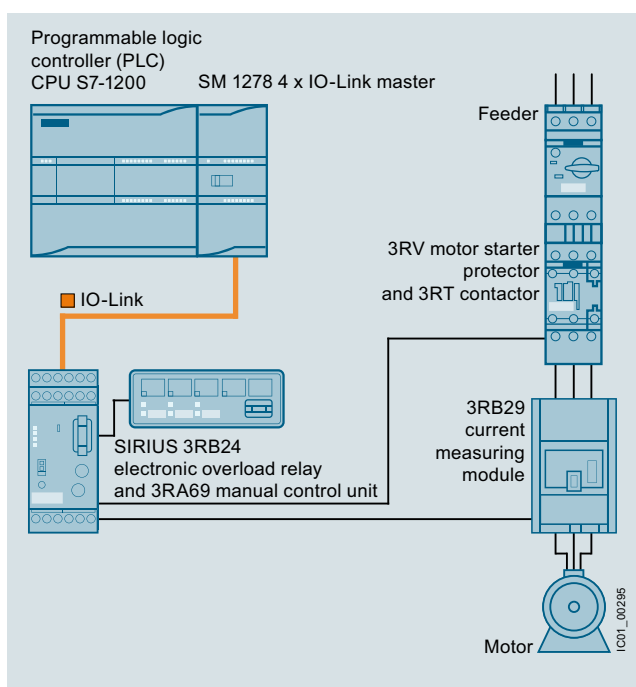

Connection of an IO-Link-capable overload relay to a SIMATIC S7-1200 controller

Load feeders and motor starters

Through IO-Link it is possible to control not only sensors but also actuators in the form of load feeders and motor starters.

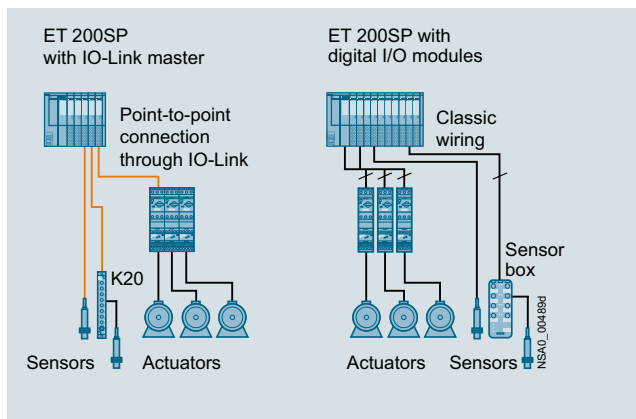


Possibilities for connecting load feeders and motor starters to IO-Link or in the conventional way

IO-Link Introduction


System components

Monitoring relays

By using monitoring relays with IO-Link it is now possible to send data that has already been recorded and evaluated in the devices directly to the controller. This avoids the use of duplicated sensors.

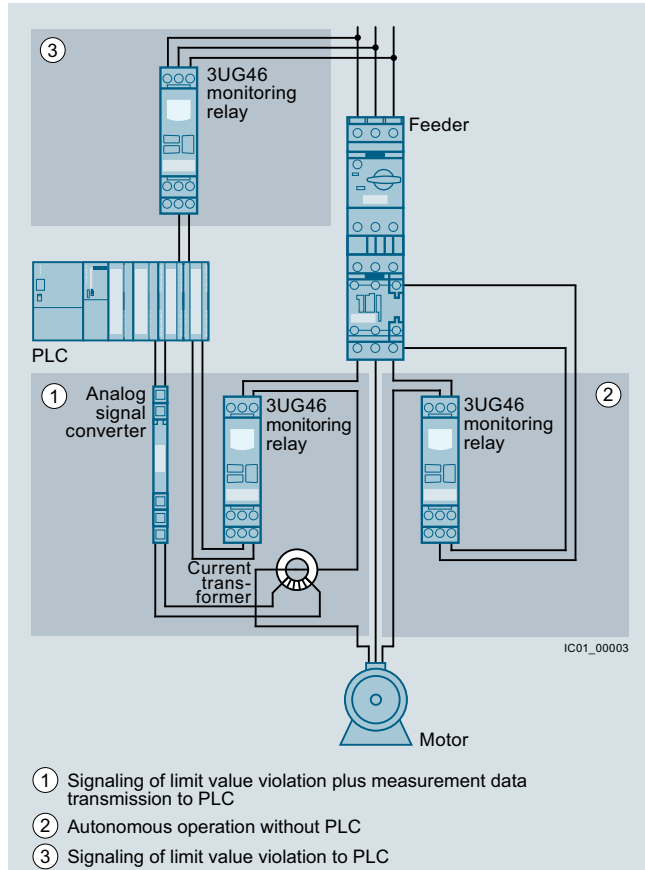

Possibilities for interfacing conventional 3UG46 monitoring relays (in comparison with 3UG48)

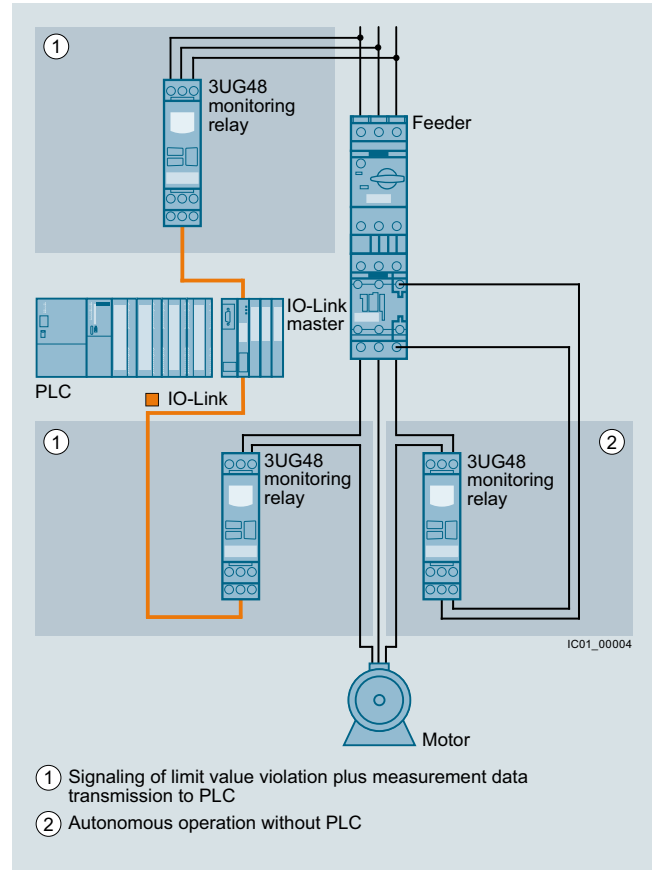

Possibilities of interfacing 3UG48 monitoring relays for IO-Link


Using an upstream IWLAN client module, such as SCALANCE W722-1 RJ45, allows IO-Link to be integrated into the PROFINET world via a distributed I/O. Possible uses include acting as an alternative to fault-prone cable carrier or collector wire technology.

The individual diagnostics options offered by the various IO-Link devices provide greater transparency for the production process. Just like the parameter data for a device, these diagnostics data can be evaluated remotely using the possibilities offered by SIMATIC. This supports remote maintenance down to the lowest level in the field.



IO-Link components

Masters



- IO-Link master module for S7-1200
 - SM 1278 4xIO-Link signal module, [see from page 2/104 onwards](#)
 - IO-Link master module for ET 200SP
 - CM 4xIO-Link communication module, [see from page 2/105 onwards](#)
 - IO-Link master module for ET 200pro
 - 4 IO-Link HF electronic module, [see page 2/108](#)
 - IO-Link master module for ET 200eco PN
 - IO-Link master 4 IO-L + 8DI + 4DQ 24 V DC/1.3 A
 - IO-Link master 4 IO-L
- [See page 2/109 onwards](#)
- IO-Link master module for ET 200AL
 - CM IO-Link communication module, [see from page 2/111 onwards](#)

Detection with IO-Link

K20 input module

- 4 inputs, M12 connections
 - 8 inputs, standard M8 connections
- [See page 2/115](#)



Switching with IO-Link

Contactors and contactor assemblies

SIRIUS 3RT contactors, 3-pole up to 250 kW, [see page 3/17 onwards](#)

SIRIUS 3RA23 reversing contactor assemblies, up to 55 kW, [see page 3/156 onwards](#)

SIRIUS 3RA24 contactor assemblies for wye-delta starting, up to 90 kW, [see page 3/171 onwards](#)

SIRIUS 3RA27 function modules

- For direct-on-line, reversing, and star-delta (wye-delta) starting with IO-Link connection, [see page 3/107 onwards](#)




Motor starters for use in the control cabinet

SIRIUS 3RA64, 3RA65 compact starters for IO-Link

- 3RA64 direct-on-line starters, [see page 8/68](#)
- 3RA65 reversing starters, [see page 8/69](#)

Infeed system for 3RA6, see page 8/78 onwards

Accessories, [see page 8/70 onwards](#)



Contactors with IO-Link

Overload relays

SIRIUS 3RB24 electronic overload relays for IO-Link

- Evaluation modules
 - Current measuring modules from 0.3 to 630 A
 - Controlling direct-on-line, reversing and star-delta starters via IO-Link in conjunction with contactors
 - Full motor protection
 - Diagnostics and current value transmission via IO-Link
- [See page 7/130 onwards](#)

IO-Link Introduction

System components

IO-Link devices (continued)



SIRIUS 3RR24
monitoring relays



SIRIUS 3UG48
monitoring relays



SIRIUS 3RS14
temperature
monitoring relay



SIRIUS ACT
3SU1 ID key-
operated switches



SIRIUS ACT
3SU1 electronic
module

Monitoring with IO-Link

SIRIUS 3RR24 monitoring relays for mounting onto 3RT2 contactors for IO-Link

- Monitoring of current, phase failure, open circuit and phase sequence
- Designed for mounting on 3RT2 contactors
- Terminal supports for stand-alone installation for separate mounting

See page 10/70 onwards

SIRIUS 3UG48 monitoring relays for stand-alone installation for IO-Link

- Monitoring the supply system, voltage, current, power factor and active current, residual current or speed depending on device design
- On/tripping delay time can be adjusted

See page 10/109 onwards

SIRIUS 3RS14, 3RS15 temperature monitoring relays for IO-Link

- Temperature monitoring with connected sensors
- Two limit values, can be adjusted separately

See page 10/143 onwards

Actuating and indicating with IO-Link

SIRIUS ACT 3SU1 ID key-operated switches for IO-Link

- Access system and selection system for four authorization levels
- Authentication of groups and persons
- Five ID keys with different coding
- Option for individual coding via IO-Link
- For installation in enclosures or fastening on front plate
- Electronic module for ID key-operated switches must be ordered separately

See page 13/10

SIRIUS ACT 3SU1 electronic modules for IO-Link

- Eight digital inputs and outputs possible
- DI and DQ freely selectable (programmable)
- Input and output functions parameterizable
- Connection system (push-in)
- For fastening on front plate, see page 13/98
- For installation in enclosure, see page 13/113

IO-Link RFID systems



RFID system for
IO-Link

SIMATIC RF200 RFID system in the HF range

Products SIMATIC RF210R, SIMATIC RF220R, SIMATIC RF240R, SIMATIC RF250R, SIMATIC RF260R

- Simple identification tasks such as reading an ID number (UID)
- Reading of user data
- Writing of user data
- No RFID-specific programming, ideal for those new to RFID
- Simple connection via master modules for IO-Link, such as SIMATIC S7-1200, ET 200SP, ET 200pro, ET 200eco PN and ET 200AL
- Use with the tried and tested ISO 15693 transponders (MDS xxx)

See Catalog ID 10

IO-Link Device Description (IODD)



IODD files for
IO-Link

IODD files

These files provide the device description for IO-Link devices.

- Comprehensive IODD catalog of SIEMENS IO-Link devices
- Freely available for download from Industry Online Support, see <https://support.industry.siemens.com/cs/ww/en/ps/15851>

IODDfinder

The entire world of IO-Link under one roof

The IODDfinder is a service provided by the IO-Link community. It is a central cross-vendor database for descriptive files (IODDs). In addition, the platform provides an overview of the available IO-Link devices.

For more information, see <https://ioddfinder.io-link.com/#/>.

IO-Link software



STEP 7 PCT

STEP 7 PCT (Port Configuration Tool)


Engineering software for configuring the IO-Link master modules for SIMATIC S7-1200, ET 200SP, ET 200pro, ET 200eco PN and ET 200AL

- Available as a stand-alone version or integrated into STEP 7 (V5.5 SP1 or later) and TIA (V12 or later)
- Engineering of the IO-Link devices connected to the master
- Monitoring of the process image of the IO-Link devices
- Open interface for importing further IODDs
- Freely available for download from Industry Online Support, see <https://support.industry.siemens.com/cs/ww/en/view/32469496>


IO-Link function blocks (IO-Link device and IO-Link master)

STEP 7 function block for easy acyclical data exchange in the user program

- Freely available for download from Industry Online Support, see <https://support.industry.siemens.com/cs/ww/en/view/82981502>



IO-Link device
function block



"Siemens IO-Link
Devices" block
library

"Siemens IO-Link Devices" block library

This library provides function blocks and user-defined data types (UDTs) for all IO-Link devices from the Siemens portfolio. These blocks and UDTs standardize and simplify communication with IO-Link devices.

- Freely available for download from Industry Online Support, see <https://support.industry.siemens.com/cs/ww/en/view/90629409>


Overview**Principles of the IO-Link specification**

According to the IO-Link specification, communication functions as follows:

- Transmission takes place via an unshielded three-wire cable no more than 20 m long, of the kind normally used for standard sensors
- Digital communication from 0 to 24 V on the so-called C/Q cable
- Most of the values transmitted are measured values from the sensors
- The sensors and actuators are described by the IO Device Description (IODD)
- As a matter of principle, one IO-Link device can be connected to one IO-Link port of the master (point-to-point connection)
- The transmission rates between IO-Link master and the devices are as follows:
 - Via COM1: 4 800 Bd
 - Via COM2: 38 400 Bd
 - Via COM3: 230 400 Bd
- The average cycle time is 2 ms for the reading/writing of 16 data bits at a transmission rate of 38 400 Bd

IO-Link protocol

The IO-Link protocol supports both the Standard IO mode (SIO) and the IO-Link communication mode (COM).

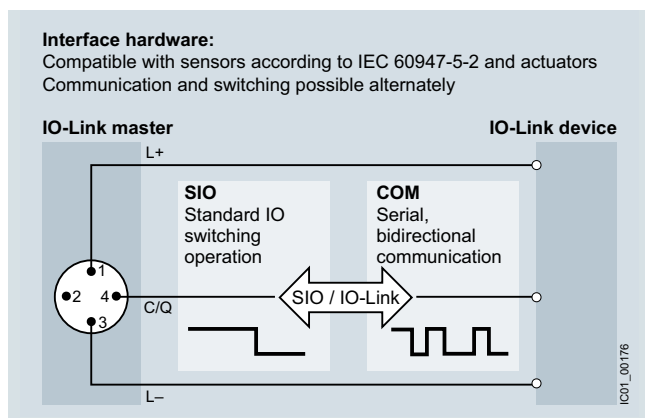

The structure of the protocol and its message frames depends on the types of data to be transmitted.

Data types

The IO-Link specification makes a distinction between the following data types:

Process data

The process data of the devices are transferred cyclically in a data frame, with the process data width defined by the device. Process data of 0 to 32 bytes are possible per device (input and output in each case). The consistency width of the transmission is not fixed and therefore depends on the master.

Value status

Each port has a value status (PortQualifier). The value status indicates whether the process data are valid or invalid. The value status can be transferred cyclically with the process data.

Device data

Device data can be parameters, identification data and diagnostics information. Device data replacement is acyclic and in response to an inquiry from the IO-Link master. Device data can be written into the device (Write) and also read from the device (Read).

Events

When an event occurs, the device sends a signal to the master to report that an event is active. The master then reads out the event. Events can be fault messages (e.g. short-circuit) and warnings/maintenance data (e.g. contamination, overheating). Fault messages are transferred from the device via the IO-Link master to the controller or HMI. The IO-Link master can also transfer events and states. Events include, for example, cable break or communication breakdown.

Device parameters and events are sent independently of the cyclic transmission of process data. The transmissions do not affect or impair each other.

Data storage

As of specification V1.1, a data storage concept has been created for IO-Link. In this concept, the IO-Link device initiates storage of its data on a higher-level parameter server. In the event that a device is replaced, the parameter server can restore the original parameterization. It is therefore possible to replace the devices without re-parameterization.

The IO-Link master contains the parameter server. The parameter server can also be implemented centrally in the PLC or in a system server. In this case the data must be downloaded to the control system by means of the function blocks provided.

IO-Link masters

The IO-Link master is the interface to higher-level control systems. The IO-Link master presents itself to the fieldbus as a normal fieldbus node, and is integrated into the appropriate network configurator via the relevant device description (GSD file).

IO Device Description (IODD)

The IO Device Description (IODD) has been defined to provide a full, transparent description of system characteristics as far as the IO-Link device.

The IODD contains information on communication characteristics, device parameters, identification, process and diagnostics data, and is supplied by the manufacturer. The design of the IODD is the same for all devices from all manufacturers, and is always presented in the same way by the IODD Interpreter Tools. This therefore ensures that the handling is the same for all IO-Link devices, whatever the manufacturer.

New in IO-Link specification V1.1

The IO-Link specification is currently available in Version 1.1, and standardized in accordance with IEC 61131-9.

Specification V1.1 offers the following new features compared with the previous specification V1.0:

- Transmission of up to 32 bytes of process data in one cycle
- Parameter server function

IO-Link

Masters

IO-Link Master Module for S7-1200

SM 1278 4xIO-Link master

Overview



SM 1278 4xIO-Link master

Module for connecting up to four IO-Link devices in accordance with the IO-Link specification V1.1. The IO-Link parameters are configured by means of the Port Configuration Tool (PCT) with version V3.2 and higher.

Application

The SM 1278 module enables an exchange of data with up to four external IO-Link devices through one three-wire cable each or four standard actuators or standard encoders. Control can be flexibly adapted to the communication partners using the comprehensive parameter assignment options. Since IO-Link is compatible with standard sensors, commercially available sensors compliant with IEC 61131 Type 1 can also be operated on the IO-Link master.

Design

- Expansion limits
 - Cable length: Max. 20 m
 - Max. 32 bytes of input data and 32 bytes of output data per port
 - Max. 32 bytes of input data and 32 bytes of output data per module

LED displays

- DIAG: Operating state display (green/red) of the module
- C1..C4: Port status display (green) for ports 1, 2, 3 and 4
- Q1..Q4: Channel status display (green) for ports 1, 2, 3 and 4
- F1..F4: Port error display (red) for ports 1, 2, 3 and 4

Depending on the CPU type used, up to 8 SM 1278 units can be used on one S7-1200 CPU.

Function


Supported functions

- I&M identification data
- Firmware update
- SIO Mode (standard IO mode)
- IO-Link parameter assignment with the S7-PCT interface configuration tool, TIA Portal from V13 and an S7-1200 CPU V4.0 or higher

Supported data transmission rates


- COM1 (4.8 kBd)
- COM2 (38.4 kBd)
- COM3 (230.4 kBd)

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
	1	6ES7278-4BD32-0XB0		1	1 unit	212
SM 1278 4xIO-Link master signal module For connecting up to four IO-Link devices in accordance with the IO-Link specification V1.1						

6ES7278-4BD32-0XB0

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
	1	6ES7292-1AG30-0XA0		1	4 units	212
Terminal block (spare part) With 7 screws, zinc-plated; 4 units						

6ES7292-1AG30-0XA0

Overview



CM 4xIO-Link communication module

- CM 4xIO-Link communication module
Serial communication module for connecting up to four IO-Link devices in accordance with the IO-Link specification V1.0 and V1.1. The IO-Link parameters are configured by means of the Port Configuration Tool (PCT) with version V3.0 and higher.
- Time-based IO
Time-based IO ensures that signals are output with a precisely defined response time. By combination of inputs and outputs, products passing by, for example, can be measured exactly or liquids can be perfectly dosed.
- Supported data transmission rates
 - COM1 (4.8 kBd)
 - COM2 (38.4 kBd)
 - COM3 (230.4 kBd)

- Expansion limits
 - Cable length: Max. 20 m
 - Max. 32 bytes of input data and 32 bytes of output data per port
 - Max. 144 bytes of input data and 128 bytes of output data per module
- ET 200SP system functions supported
 - Exchange of IO-Link device parameters (V1.1 devices only) and of IO-Link master parameters without a PG including automatic backup recovery without an engineering tool by means of redundant parameter storage on the e-coding element
 - Reparameterization during ongoing operation
 - I&M identification data
 - Firmware update
 - PROFlenergy
- Can be plugged onto type A0 BaseUnits (BU) with automatic e-coding
- LED displays
 - DIAG: Operating state display (green/red) of the module
 - C1..C4: Port status display (green) for ports 1, 2, 3 and 4
 - Q1..Q4: Channel status display (green) for ports 1, 2, 3 and 4
 - F1..F4: Port error display (red) for ports 1, 2, 3 and 4
 - PWR: Supply voltage display (green)
- Informative front-side module inscription
 - Plain-text marking of the module type and function class
 - 2D matrix code (Article No. and serial number)
 - Connection diagram
 - CM module class color coding: Silver
 - Hardware and firmware version
 - Complete article number
- Optional accessories
 - Labeling strips
 - Reference identification label
 - Color-coded label with color code CC04
- Optional system-integrated shield connection

CM 4xIO-Link overview

Communication module	Article number	CC code	BU type	PU
CM 4xIO-Link	6ES7137-6BD00-0BA0	CC04	A0	1

Overview of BaseUnits

BaseUnit	Article number	CC codes for process terminals	CC codes for AUX terminals	PU
BU type A0 • New load group (light) • 16 process terminals • With 10 AUX terminals	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73	1
BU type A0 • New load group (light) • 16 process terminals • With 10 AUX terminals	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73	10
BU type A0 • New load group (light) • 16 process terminals • Without AUX terminals	6ES7193-6BP00-0DA0	CC01 to CC05	--	1
BU type A0 • New load group (light) • 16 process terminals • Without AUX terminals	6ES7193-6BP00-2DA0	CC01 to CC05	--	10
BU type A0 • Load group forwarding (dark) • 16 process terminals • With 10 AUX terminals	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73	1
BU type A0 • Load group forwarding (dark) • 16 process terminals • With 10 AUX terminals	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73	10
BU type A0 • Load group forwarding (dark) • 16 process terminals • Without AUX terminals	6ES7193-6BP00-0BA0	CC01 to CC05	--	1
BU type A0 • Load group forwarding (dark) • 16 process terminals • Without AUX terminals	6ES7193-6BP00-2BA0	CC01 to CC05	--	10

IO-Link

Masters

IO-Link Master Module for ET 200SP

CM 4xIO-Link

Application

- The CM 4x IO-Link communication module enables an exchange of data with up to 4 external IO-Link devices through one three-wire cable each.
- Control can be flexibly adapted to the communication partners using the comprehensive parameter assignment options.
- Since IO-Link is compatible with standard sensors, commercially available sensors compliant with IEC 61131 Type 1 can also be operated on the IO-Link master.

Design

Supported BaseUnits (BU)

All BUs of the A0 type are available for the CM 4x IO-Link communication module.

Load group formation

A light BU isolates the self-establishing internal voltage buses (P1, P2, AUX), thus opening a new load group. A load group's supply voltage must be fed in on this load group's light BU.

A dark BU passes on the supply voltage of the adjacent light BU on the left through the self-establishing voltage buses P1, P2 and AUX. Therefore, a supply again is only necessary at the following light BU on the right. Setting of a further light BU is always necessary if

- a new load group is to be formed (for example, to isolate the supply voltage from module groups) or
- the maximum simultaneously required current of the load group exceeds the permissible limit of 10 A.

Color coding of terminals

The potentials at the terminals of the BaseUnit are defined by the inserted I/O module. To avoid wiring errors, the terminals' potentials can be optionally identified by module-specific color-coded labels. The color-coded label matching the relevant I/O module is defined by the I/O module's color code CCxx. This color code is also printed onto the front of the module.

The color-coded label with the color code CC04 must be used for the "CM 4x IO-Link" communication module.

In the case of BaseUnits with the additional ten internally jumpered AUX terminals, these can also be color-coded with color-coded labels. Color-coded labels are available in red, blue and yellow-green for the ten AUX terminals.

Labeling

Labeling strips

Labeling strips can be inserted into the front of the interface or I/O modules and can be labeled individually via STEP 7, macros, etc. A special additional support is not required. They can be replaced easily with the component as necessary.

Reference identification labels

Reference identification labels enable easy equipment identification (e.g. in accordance with EN 81346). They are simply plugged onto the required component (interface module, I/O modules and BaseUnits) and can thus be replaced easily with the component, whenever required.


The following labeling components are available for selection:

- Film labeling strips, light gray, roll with 500 strips, pre-perforated, for thermal transfer roll printer
- Film labeling strips, yellow, roll with 500 strips, pre-perforated, for thermal transfer roll printer
- Cardboard labeling strips (180 g/m²), light gray, ten A4 sheets of 100 strips each, pre-perforated, for laser printer
- Cardboard labeling strips (180 g/m²), yellow, ten A4 sheets of 100 strips each, pre-perforated, for laser printer
- Reference identification labels, white, ten mats of 16 plates each, for thermal transfer card printer or labels

System-integrated shield connection

A shield terminal that can be fitted quickly and easily is available for space-saving and EMC-optimized connection of cable shields. It consists of a shield connection element and a shield terminal that can be plugged onto the BaseUnit for each module. Low-impedance connection to functional ground (DIN rail) is carried out by the user without additional wiring.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 6ES7137-6BD00-0BA0	X	6ES7137-6BD00-0BA0		1	1 unit	255
CM 4xIO-Link V1.1 Standard communication module <ul style="list-style-type: none"> • Serial communication module for connecting up to 4 IO-Link devices, time-based IO, BU type A0, color code CC04 						

6ES7137-6BD00-0BA0

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					

Accessories

Usable type A0 BaseUnits



6ES7193-6BP20-0DA0

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and additionally 10 internally jumpered AUX terminals (1 A to 10 A); for beginning a new load group (max. 10 A)

- 1 unit
- 10 units

X
X

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

1 1 unit 255
1 10 units 255



6ES7193-6BP00-0DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for beginning a new load group (max. 10 A)

- 1 unit
- 10 units

X
X

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

1 1 unit 255
1 10 units 255



6ES7193-6BP20-0BA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and additionally 10 internally jumpered AUX terminals (1 A to 10 A); for load group continuation

- 1 unit
- 10 units

X
X

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

1 1 unit 255
1 10 units 255



6ES7193-6BP00-0BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for load group continuation

- 1 unit
- 10 units

X
X

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

1 1 unit 255
1 10 units 255

Reference identification label

10 sheets of 16 labels, for printing with thermal transfer card printer or plotter

1

6ES7193-6LF30-0AW0

1 10 units 255

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

1

6ES7193-6LR10-0AA0

1 1 unit 255

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

1

6ES7193-6LR10-0AG0

1 1 unit 255

1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer

1

6ES7193-6LA10-0AA0

1 1 unit 255

1 000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer

1

6ES7193-6LA10-0AG0

1 1 unit 255

Color-coded labels

Color code CC04, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), blue (terminals 13 to 16); 10 units

1

6ES7193-6CP04-2MA0

1 10 units 255

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units

1

6ES7193-6CP71-2AA0

1 10 units 255

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units

1

6ES7193-6CP72-2AA0

1 10 units 255

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units

1

6ES7193-6CP73-2AA0

1 10 units 255

Spare parts

Electronic coding element type H

Pack containing 5 units; included in the scope of supply of the CM 4x IO-Link module

1

6ES7193-6EH00-1AA0

1 5 units 256

IO-Link Masters IO-Link Master Module for ET 200pro

IO-Link master modules

Overview



4 IO-Link HF electronic module

- 45-mm-wide 4 IO-Link HF electronic module
- 4 IO-Link ports acc. to IO-Link specification V1.1
- Port class B
- The IO-Link parameters are configured using the Port Configuration Tool (S7-PCT), version V3.4 and higher

Application

The 4 IO-Link HF electronic module enables the exchange of data with up to 4 IO-Link devices.


Since IO-Link is compatible with standard sensors, commercially available sensors compliant with IEC 61131 Type 1 can also be operated on the IO-Link master.

Design

The 4 IO-Link HF electronic module is used together with the CM IO-LK 4 X M12 P connection module. Sensors and actuators are integrated using commercially available 3- or 5-pin M12 plugs on the CM IO-Link 4 X M12 P.

IO-Link devices (e.g. sensors) with a class A port are interconnected by means of a 3-wire cable. IO-Link devices that require an additional supply voltage and have a class B port (e.g. actuators) are interconnected by means of a 5-wire cable.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 4 IO-Link HF electronic modules <ul style="list-style-type: none"> • 4 IO-Link ports acc. to IO-Link specification V1.1 • Port class B • High Feature • Channel diagnostics • Including bus module • Connection module must be ordered separately 	1	6ES7147-4JD00-0BA0		1	1 unit	250

6ES7147-4JD00-0BA0

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
CM IO-Link 4 X M12 P connection modules 4 M12 sockets for connection of IO-Link devices to ET 200pro 4 IO-Link HF electronic module	1	6ES7194-4CA20-0AA0		1	1 unit	250
Module labeling plates For color coding of CM IOs in the colors white, red, blue and green; pack of 100	1	6ES7194-4HA00-0AA0		1	500 units	250
M12 sealing caps For protection of unused M12 terminals on ET 200pro	▶	3RX9802-0AA00		100	10 units	42C

Overview



ET 200eco PN IO-Link master modules

The ET200eco PN IO-Link master modules belong to the ET 200eco PN compact block I/O device family and are distinguished by the following features:

- Compact block I/O devices for connection of IO-Link devices and connection to the PROFINET bus system
- Design without a control cabinet in IP67 degree of protection with M12 connection system
- Very rugged and resistant encapsulated metal enclosure
- Compact module in an enclosure width of 30 mm or 60 mm
- PROFINET connection: 2 x M12 and automatic PROFINET addressing
- 100 MBit/s data transmission rate
- LLDP neighborhood detection without PG
- Supply and load voltage connection: 2 x M12
- Channel-exact diagnostics

Application

IO-Link enables easy integration of sensors and actuators from different manufacturers. ET200eco PN IO-Link master modules enable an exchange of data with up to 4 IO-Link devices. Since IO-Link is compatible with standard sensors, commercially available sensors compliant with IEC 61131 Type 1 can also be operated on the IO-Link master.

With a high degree of protection, ruggedness and small dimensions, the IO-Link master modules are especially well-suited for use at the machine level in confined spaces. They have adjustable parameters and diagnostic functions

and can therefore be flexibly adapted to individual process requirements.

The following IO-Link masters are available:

- Compact module in an enclosure width of 30 mm for connecting up to 4 IO-Link devices in accordance with the IO-Link specification V1.0 and V1.1 and Port Class B
- Compact module in an enclosure width of 60 mm for connecting up to 4 IO-Link devices in accordance with the IO-Link specification V1.0 and port class A and an additional 8 digital inputs and 4 digital outputs.



Design

The IO-Link master modules have a screw mounting hole at the front and side, and can be mounted in any position. As a result, they are extremely flexible to install on either a level surface or on aluminum mounting rails using sliding blocks.

ET 200eco PN IO-Link masters are compact modules with M12 connection technology.

Two load power supplies (4 A each) are available that can be used by the compact module or also be looped through to another compact module (line topology). PROFINET is connected via an M12 connection and can be looped through to a further PROFINET device. The maximum cable length to the IO-Link device is 20 m.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
ET 200eco PN IO-Link master						
 6ES7148-6JA00-0AB0	1	6ES7148-6JA00-0AB0		1	1 unit	250
• 4 IO-L + 8 DI + 4 DQ, 24 V DC/1.3 A; 8 x M12, degree of protection IP67, enclosure width 60 mm; for connecting up to 4 IO-Link devices according to IO-Link specification V1.0 and port Class A as well as 8 digital inputs and 4 digital outputs						
 6ES7148-6JD00-0AB0	1	6ES7148-6JD00-0AB0		1	1 unit	250
• 4 IO-L 4 x M12, degree of protection IP67, enclosure width 30 mm; for connecting up to 4 IO-Link devices according to IO-Link specification V1.0 and V1.1 and port Class B						

IO-Link Masters IO-Link Master Module for ET 200eco PN

ET 200eco PN IO-Link master

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Voltage distributor Voltage distributor PD 24 V DC; 1 X 7/8", 4 X M12	1	6ES7148-6CB00-0AA0		1	1 unit	250
Terminal block For ET 200eco PN, 10 A insulation displacement terminations	1	6ES7194-6CA00-0AA0		1	1 unit	250
Replacement fuses For terminal block, 10 units	1	6ES7194-6HB00-0AA0		1	10 units	250
Mounting rail 0.5 m	1	6ES7194-6GA00-0AA0		1	1 unit	250
Profile screw For the mounting rail, 50 units	1	6ES7194-6MA00-0AA0		1	50 units	250
Sealing caps M12 for IP67 modules, 10 units	▶	3RK1901-1KA00		100	10 units	42C
Labels 10 mm x 7 mm, pastel turquoise, 816 units	15	3RT1900-1SB10		100	816 units	41B
PROFINET M12 connection plug, can be pre-assembled IE FC M12 plug PRO, can be pre-assembled						
• 1 unit	1	6GK1901-0DB20-6AA0		1	1 unit	5K1
• 8 units	1	6GK1901-0DB20-6AA8		1	8 units	5K1
PROFINET M12 plug-in cables Pre-assembled connecting cables with 2 M12 plugs (D-coded), in various lengths:						
• 0.3 m	1	6XV1870-8AE30		1	1 unit	5K1
• 0.5 m	1	6XV1870-8AE50		1	1 unit	5K1
• 1.0 m	1	6XV1870-8AH10		1	1 unit	5K1
• 1.5 m	1	6XV1870-8AH15		1	1 unit	5K1
• 2.0 m	1	6XV1870-8AH20		1	1 unit	5K1
• 3.0 m	1	6XV1870-8AH30		1	1 unit	5K1
• 5.0 m	1	6XV1870-8AH50		1	1 unit	5K1
• 10.0 m	1	6XV1870-8AN10		1	1 unit	5K1
• 15.0 m	1	6XV1870-8AN15		1	1 unit	5K1
M12 connection plug for 24 V DC load supply Connection socket for 24 V DC incoming supply; 4-pole, A-coded, 3 units	1	6GK1907-0DC10-6AA3		1	3 units	5W3
Connector for loop-through of 24 V DC; 4-pole, A-coded, 3 units	1	6GK1907-0DB10-6AA3		1	3 units	5W3
M12 power connector cables Pre-assembled power connector cables with M12 box and plug, 4 x 0.75 mm ² on both sides, in various lengths:						
• 0.3 m	1	6XV1801-5DE30		1	1 unit	5K2
• 0.5 m	1	6XV1801-5DE50		1	1 unit	5K2
• 1.0 m	1	6XV1801-5DH10		1	1 unit	5K2
• 1.5 m	1	6XV1801-5DH15		1	1 unit	5K2
• 2.0 m	1	6XV1801-5DH20		1	1 unit	5K2
• 3.0 m	1	6XV1801-5DH30		1	1 unit	5K2
• 5.0 m	1	6XV1801-5DH50		1	1 unit	5K2
• 10.0 m	1	6XV1801-5DN10		1	1 unit	5K2
• 15.0 m	1	6XV1801-5DN15		1	1 unit	5K2
M12 Y-cables For double connection of I/Os by means of a single-cable on ET 200, 5-pole	1	6ES7194-6KA00-0XA0		1	1 unit	250

Overview



CM IO-Link communication module

- 30-mm-wide CM IO-Link communication module
- For connecting up to 4 IO-Link devices in accordance with the IO-Link specification V1.0 and V1.1 and Port Class B
- The IO-Link parameters are configured by means of the Port Configuration Tool S7-PCT with version V3.2 and higher.

Application

The CM IO-Link communication module supports data exchange between up to four IO-Link devices.

IO-Link devices (e.g. sensors) with a class A port are interconnected by means of a 3-wire cable. IO-Link devices that require an additional supply voltage and have a class B port (e.g. actuators) are interconnected by means of a 5-wire cable.

Since IO-Link is compatible with standard sensors, commercially available sensors compliant with IEC 61131 Type 1 can also be operated on the IO-Link master.

The 30-mm-wide I/O modules are ideally suited for use in extremely confined spaces. They have adjustable parameters and diagnostic functions and can therefore be flexibly adapted to individual process requirements.

The following IO-Link masters are available:

- CM 4xIO-Link communication modules, 4XM12

Design

The I/O modules have a screw mounting hole at the front and side, and can be mounted in any position. As a result, they are extremely flexible to install on either a level surface or on aluminum mounting rails using sliding blocks.

The CM IO-Link communication module features:

- A backplane bus connection (Ethernet connection) with M8 connection system for connection to an interface module or other I/O modules
- A power supply connection with M8 connection system with loop-through
- LED display for port status
- LED display for channel status in SIO mode
- LED display for module status (DIAG)

- LED display for load voltage 2L+ (PWR)
- Labeling plates for channel, module and slot identification
- Integrated cable tie holder
- Meaningful module inscription on front panel:
 - Plain text marking of module type
 - Interface marking
 - LED label
- Meaningful module inscription on side panel:
 - Article number, function level and FW version
 - 2D matrix code (Article No. and serial number)
 - Pin assignments of all interfaces

Labeling plates for channel, module and slot identification are supplied with the modules. These labeling plates can be inscribed using commercially available inscription machines.


Function

- IO-Link master according to IO-Link specification V1.1
- 4 ports, Class B type
- Supported data transmission rates
 - COM1 (4.8 kBd)
 - COM2 (38.4 kBd)
 - COM3 (230.4 kBd)
- Expansion limits
 - Cable length: max. 20 m
 - Max. 32 bytes of input data and 32 bytes of output data per port
 - Max. 32 bytes of input data and 32 bytes of output data per module
- Automatic backup of device parameters when the IO-Link device is replaced (V1.1 devices only)
- Reparameterization during ongoing operation
- Standardized display and diagnostics concept:
 - Port status display (port activated or deactivated, green LED)
 - Channel status display for signal state in SIO mode (green LED)
 - Module status display (DIAG, red/green LED)
 - Display for monitoring the load voltage 2L+ (PWR, green LED)
- Supported functions:
 - Detailed module diagnostics and diagnostic interrupt
 - Identification and maintenance data IM0 ... IM3
 - Firmware update
 - PROFIenergy

IO-Link Masters IO-Link Master Module for ET 200AL







CM IO-Link





Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 <p>CM IO-Link CM 4X IO-Link, 4XM12; for the connection of up to 4 IO-Link devices according to IO-Link specification V1.0 and V1.1 and port Class B</p>	15	6ES7147-5JD00-0BA0		1	1 unit	254

6ES7147-5JD00-0BA0

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
Bus cable for backplane bus (ET connection) 4-pole, shielded						
 <p>6ES7194-2L...-0AA0</p>		• Pre-assembled on both sides, 2 M8 plugs				
	1	6ES7194-2LH02-0AA0		1	1 unit	254
	1	6ES7194-2LH03-0AA0		1	1 unit	254
	1	6ES7194-2LH10-0AA0		1	1 unit	254
	1	6ES7194-2LH20-0AA0		1	1 unit	254
	1	6ES7194-2LH50-0AA0		1	1 unit	254
	1	6ES7194-2LN10-0AA0		1	1 unit	254
 <p>6ES7194-2L...-0AB0</p>		• Pre-assembled on both sides, 2 M8 angular plugs				
	1	6ES7194-2LH03-0AB0		1	1 unit	254
	1	6ES7194-2LH10-0AB0		1	1 unit	254
	1	6ES7194-2LH20-0AB0		1	1 unit	254
	1	6ES7194-2LH50-0AB0		1	1 unit	254
	1	6ES7194-2LN10-0AB0		1	1 unit	254
	1	6ES7194-2LN15-0AB0		1	1 unit	254
 <p>6ES7194-2L...-0AC0</p>		• Pre-assembled on one side, 1 M8 plug				
	1	6ES7194-2LH20-0AC0		1	1 unit	254
	1	6ES7194-2LH50-0AC0		1	1 unit	254
	1	6ES7194-2LN10-0AC0		1	1 unit	254
	1	6ES7194-2LN15-0AC0		1	1 unit	254
M8 power cable 4-pole						
 <p>6ES7194-2L...-1AA0</p>		• Pre-assembled on both sides, M8 plug and M8 socket				
	1	6ES7194-2LH02-1AA0		1	1 unit	254
	1	6ES7194-2LH03-1AA0		1	1 unit	254
	1	6ES7194-2LH10-1AA0		1	1 unit	254
	1	6ES7194-2LH20-1AA0		1	1 unit	254
	1	6ES7194-2LH50-1AA0		1	1 unit	254
	1	6ES7194-2LN10-1AA0		1	1 unit	254
 <p>6ES7194-2L...-1AB0</p>		• Pre-assembled on both sides, M8 angular plug and M8 angular socket				
	1	6ES7194-2LH03-1AB0		1	1 unit	254
	1	6ES7194-2LH10-1AB0		1	1 unit	254
	1	6ES7194-2LH20-1AB0		1	1 unit	254
	1	6ES7194-2LH50-1AB0		1	1 unit	254
	1	6ES7194-2LN10-1AB0		1	1 unit	254
	1	6ES7194-2LN15-1AB0		1	1 unit	254
 <p>6ES7194-2L...-1AC0</p>		• Pre-assembled on one side, one M8 socket				
	1	6ES7194-2LH20-1AC0		1	1 unit	254
	1	6ES7194-2LH50-1AC0		1	1 unit	254
	1	6ES7194-2LN10-1AC0		1	1 unit	254
	1	6ES7194-2LN15-1AC0		1	1 unit	254

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	d					
 6ES7194-2AB00-0AA0	1	6ES7194-2AB00-0AA0		1	1 unit	254
M8 plug for Ethernet connection 4-pole, shielded						
 6ES7194-2AA00-0AA0	1	6ES7194-2AA00-0AA0		1	1 unit	254
	1	6ES7194-2AC00-0AA0		1	1 unit	254
M8 power plug • Male contact insert, 4-pole • Female insert, 4-pole						
 6ES7194-2KA00-0AA0	1	6ES7194-2KA00-0AA0		1	1 unit	254
Ethernet connection Fast Connect Stripping Tool Stripping tool for stripping the Ethernet connection bus cable						
 6ES7194-2BA00-0AA0	1	6ES7194-2BA00-0AA0		1	1 unit	254
Labeling plates 10 x 5 mm, RAL 9016, 5 frames with 40 labels each						

More information

More information

Brochures

Information material for downloading free of charge from the Internet at:
<http://www.siemens.com/simatic/printmaterial>.

IO-Link Input Modules

General data

Overview



IO-Link input modules

Using IO-Link technology, it is basically possible to connect standard sensors to IO-Link masters. However, connecting standard sensors directly to the IO-Link master does not exploit the full potential of IO-Link.

The solution lies in the technology of the IO-Link modules. Their use is a more economically attractive solution in comparison to the direct connection of a sensor.

The IO-Link input module technology enhances IO-Link via a pure point-to-point cable connection towards decentralized structures. The maximum cable length of an IO-Link connection between an IO-Link module and an IO-Link master is 20 m. The use of sensor boxes with accordingly complex and error-prone wiring is no longer necessary.

Transmission of parameter and diagnostic signals

The IO-Link input modules also offer the possibility of transmitting parameters and diagnostic signals. This enables for example the inputs of modules to be parameterized as NC contacts or NO contacts through IO-Link. An overload or short-circuit in the sensor supply is signaled to the control system through the IO-Link master.

M8 and M12 terminals

M8 and M12 terminals are available for connecting the sensors. Connection to the IO-Link master is made using a standard M12 connecting cable.

Benefits

Benefits of using IO-Link input modules:


- Economical use of innovative IO-Link technology also for binary sensors
- Optimum use of all ports of the IO-Link master
- Connection of several binary sensors/actuators to one port of the IO-Link master, hence low-cost connection also of binary sensors/actuators to the control system through IO-Link
- Reduction of digital input modules in the peripheral station
- Use of parameters also for binary sensors (e.g. NC contacts, NO contacts and input delay can be parameterized)
- Reduction of cabling and hence less risk of wiring errors by dispensing with sensor boxes
- Expansion toward distributed structures using pure point-to-point wiring
- Easy and elegant integration of sensors within a radius of 20 m around an IO-Link master, e.g. in an ET 200 station
- Possibility of transmitting parameter and diagnostic signals (e.g. sensor supply overload)
- Can also be used in harsh ambient conditions thanks to a very compact design and degree of protection IP67

Application


IO-Link input modules are particularly used where sensor boxes had previously been used for the connection of binary sensors.

Application example:

Replacement of sensor boxes by using IO-Link input modules

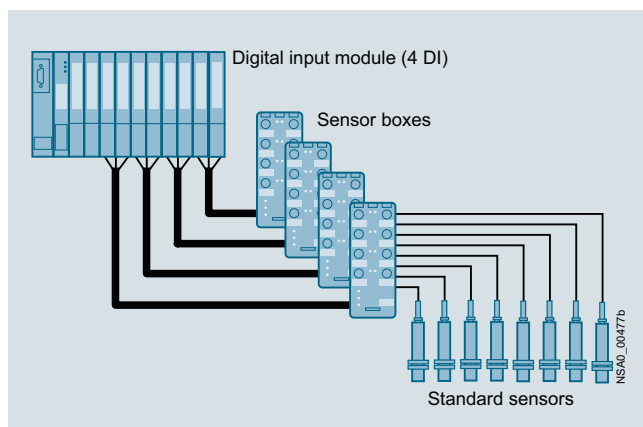

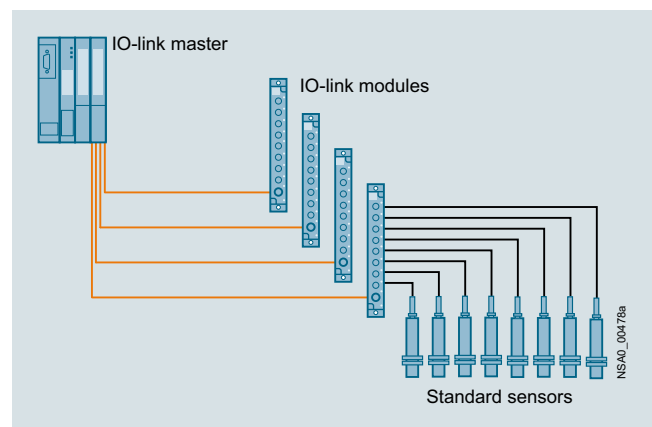

Former technology with sensor boxes












Technology with IO-Link input modules

Selection and ordering data

Type	Pin assignment	Connection	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
				d				
 3RK5010-0BA10-0AA0	K20 IO-Link modules							
	• 4 inputs	Y	M12	5	3RK5010-0BA10-0AA0	1	1 unit	42C
 3RK5010-0CA00-0AA0	• 8 inputs	Standard	M8	5	3RK5010-0CA00-0AA0	1	1 unit	42C

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
 3RK1901-1KA00	Sealing caps • M12, for free M12 sockets • M8, for free M8 sockets	►	3RK1901-1KA00	100	10 units	42C
 3RK1901-1PN00		2		100	10 units	42C
 3RK1902-4GB50-4AA0	Control cable, assembled at one end Angular M12 plug for screw fixing, 4-pole, 4 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A					
	• Cable length 5 m	5	3RK1902-4GB50-4AA0	1	1 unit	42D
 3RK1902-4CA00-4AA0	M12 socket, angled For screw mounting, 4-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A	5	3RK1902-4CA00-4AA0	1	1 unit	42D
 3RK1902-4BA00-5AA0	M12 plug For screw mounting, 5-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A					
	• Straight	5	3RK1902-4BA00-5AA0	1	1 unit	42D
 3RK1902-4DA00-5AA0	• Angled	5	3RK1902-4DA00-5AA0	1	1 unit	42D
 3RK1902-4H...-5AA0	Control cable, assembled at one end Angular M12 plug for screw fixing, 5-pole, 5 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A					
	• Cable length 1.5 m	5	3RK1902-4HB15-5AA0	1	1 unit	42D
	• Cable length 5 m	5	3RK1902-4HB50-5AA0	1	1 unit	42D
	• Cable length 10 m	5	3RK1902-4HC01-5AA0	1	1 unit	42D
 3RK1902-4PB15-3AA0	Control cable, assembled at both ends Straight M12 plug, straight M12 socket, for screw fixing, 3-pole, 3 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A					
	• Cable length 1.5 m	5	3RK1902-4PB15-3AA0	1	1 unit	42D
 6ES7194-1KA01-0XA0	M12 Y-shaped coupler plugs For connection of two sensors to one M12 socket with Y-assignment					
		1	6ES7194-1KA01-0XA0	1	1 unit	250

